

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 827 340 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
04.03.1998 Bulletin 1998/10

(51) Int Cl.<sup>6</sup>: **H04N 7/173**(21) Application number: **97306627.7**(22) Date of filing: **29.08.1997**

(84) Designated Contracting States:  
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE**

(30) Priority: **30.08.1996 JP 230026/96**

(71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL  
CO., LTD.**  
**Kadoma-shi, Osaka 571 (JP)**

(72) Inventors:

- **Mori, Toshiya**  
**Settsu-shi, Osaka-fu 566 (JP)**
- **Takao, Naoya**  
**Kadoma-shi, Osaka-fu 571 (JP)**
- **Shimoji, Tatsuya**  
**Neyagawa-shi, Osaka-fu 572 (JP)**
- **Okamura, Kazuo**  
**Hirakata-shi, Osaka-fu 573 (JP)**
- **Hirai, Junichi**  
**Suita-shi, Osaka-fu 564 (JP)**

- **Oashi, Masahiro**  
**Hirakata-shi, Osaka-fu 573-01 (JP)**
- **Kakiuchi, Takashi**  
**Toyanaka-shi, Osaka-fu 561 (JP)**
- **Kusumi, Yuki**  
**Kashiba-shi, Nara-ken 639-02 (JP)**
- **Miyabe, Yoshiyuki**  
**Osaka-shi, Osaka-fu 532 (JP)**
- **Minakata, Ikuo**  
**Souraku-gun, Kyoto-fu 619-02 (JP)**
- **Kozuka, Masayuki**  
**Neyagawa-shi, Osaka-fu 572 (JP)**
- **Mimura, Yoshihiro**  
**Hirakata-shi, Osaka-fu 573 (JP)**

(74) Representative: **Butcher, Ian James et al**  
**A.A. Thornton & Co.**  
**Northumberland House**  
**303-306 High Holborn**  
**London WC1V 7LE (GB)**

**(54) Terminal apparatus and method for achieving interactive operations**

(57) A terminal apparatus is provided for displaying an image by reproducing a piece of image information and for interactively changing the image using navigation information. The image is a moving picture, a still picture, or a mixture of them. The image information and the navigation information together are broadcast by a broadcasting station to the terminal apparatus. The navigation information indicates a plurality pieces of link-target image information. The cache unit stores a pair of image information and navigation information. The reproducing unit reproduces the image information. The monitoring unit monitors whether an operator has performed a certain operation responding to the image displayed. The receiving unit, before the operator performs the certain operation, receives a plurality pieces of im-

age information which have possibility of being displayed and a plurality pieces of corresponding navigation information based on the navigation information, and stores the plurality pieces of image information and navigation information in the cache unit. The specifying unit specifies a piece of link-target image information based on the certain operation. The identifying unit identifies the piece of link-target image information as a piece of image information. The first controlling unit reads the piece of link-target image information and instructs the reproducing unit to reproduce the piece of link-target image information, and instructs the receiving unit to receive other plurality pieces of image information and navigation information based on a piece of navigation information corresponding to the link-target image information identified by the identifying unit.

**EP 0 827 340 A2**

## Description

### BACKGROUND OF THE INVENTION

#### (1) Field of the Invention

This invention relates to a terminal apparatus used in communication services such as digital satellite broadcasting and digital CATV (Community Antenna Television), and to a method used for the terminal apparatus.

#### (2) Description of the Prior Art

As the number of channels provided in the satellite broadcasting or CATV has increased greatly, competition among broadcasting companies has been intensified. Broadcasting companies hope that broadcasting systems known as interactive TV broadcasting systems will attract many viewers, and active studies into interactive TV broadcasting systems are under way. The term "interactive" indicates that the user can display desired images by making requests. Suppose, for example, each screen includes a plurality of icons which are related to other pieces of image information which form screens. It is supposed that in the interactive TV broadcasting system, a desired piece of image information is displayed when the operator selects an icon on the interactive screen. The operator feels as if he/she could display what he/she desired. Such an interactive TV broadcasting system is epoch-making in TV broadcasting where one-way broadcasting has long been the norm. There is a possibility that the interactive TV broadcasting system will become a next-generation standard for TV broadcasting system.

Such an interactive TV broadcasting system may be achieved by a method in which each terminal apparatus sends a request for transmitting a desired piece of image information to the broadcasting station, and in response, the broadcasting station transmits the desired piece of image information to the terminal apparatus. For achieving this, the broadcasting station needs to store a large amount of image information which can be provided to the terminal apparatuses.

It is increasingly difficult to achieve the above system as the number of terminal apparatuses increases. This is because a number of communication lines need to be provided for transferring the transmission requests and image information. Such a construction may also suffer from an overflow in handling the transmission requests in the broadcasting station due to an overflow in the communication lines which are used for transferring the read requests and image information. Viewers may stop using such an interactive TV broadcasting system if it takes very long to display a desired image.

### SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a terminal apparatus and a method used therein for immediately displaying a desired piece of image information in an interactive broadcasting system upon request of the operator, where a large number of terminal apparatuses receive broadcasts in the interactive broadcasting system.

The above object is achieved by a terminal apparatus for displaying an image by reproducing one out of  $m$  pieces of image information and for interactively changing the image using  $n$  pieces of navigation information, where the image is one of a moving picture, a still picture, and a mixture of a moving picture and a still picture, where the  $m$  pieces of image information and the  $n$  pieces of navigation information together are broadcast by a broadcasting station to the terminal apparatus, where each piece of navigation information is related to an origin piece of image information and indicates a plurality pieces of link-target image information, where  $m$  and  $n$  are each an integer either of being equal to and larger than "1," the terminal apparatus including: a cache unit for storing a pair of one out of the  $m$  pieces of image information and one out of the  $n$  pieces of navigation information; reproducing unit for reproducing the one out of the  $m$  pieces of image information stored in the cache unit; monitoring unit for monitoring whether an operator has performed a certain operation responding to the image displayed; a receiving unit for, before the monitoring unit determines that the operator has performed the certain operation, receiving  $s$  pieces of image information which have possibility of being displayed and  $t$  pieces of navigation information respectively related to the  $s$  pieces of image information based on the one out of the  $n$  pieces of navigation information stored in the cache unit, and storing the  $s$  pieces of image information and the  $t$  pieces of navigation information in the cache unit, where  $s$  is an integer satisfying  $1 \leq s < m$ , and  $t$  is an integer satisfying  $1 \leq t < n$ ; a specifying unit for specifying one out of the plurality pieces of link-target image information based on the certain operation when the monitoring unit monitors that the operator has performed the certain operation; an identifying unit for identifying the one out of the plurality pieces of link-target image information specified by the specifying unit as one out of the  $s$  pieces of image information stored in the cache unit; and a first controlling unit for reading the piece of link-target image information identified by the identifying unit and instructing the reproducing unit to reproduce the piece of link-target image information, and instructing the receiving unit to receive other  $s$  pieces of image information and other  $t$  pieces of navigation information based on one out of the  $t$  pieces of navigation information in the cache unit corresponding to the piece of link-target image information identified by the identifying unit.

With such a construction, a desired piece of image

information is immediately displayed. The current screen is changed to the next screen at high speed upon request of the operator since while the current screen is displayed, a plurality pieces of link-target image information and corresponding pieces of navigation information are stored in the cache unit. The above screen change is also performed using the waiting time of the terminal apparatus for a period during which the operator determines an icon on the screen.

The above terminal apparatus may further include: a superimposing unit for superimposing, based on a piece of navigation information corresponding to the one out of the m pieces of image information stored in the cache unit, a plurality of icons on the image which is displayed when the reproducing unit reproduces the one out of the m pieces of image information, where the monitoring unit includes: a determination operation detecting unit for detecting a determination operation performed on one out of the plurality of icons, where the identifying unit identifies one out of the plurality pieces of link-target image information detected by the determination operation detecting unit.

With such a construction, a visual interactive operation is achieved since a plurality of icons, which indicate link-target pieces of image information, are superimposed on the screen image.

In the above terminal apparatus, the reproducing unit may include: a focus setting unit for making one out of the plurality of icons be in focus, where the monitoring unit includes: a cursor move operation detecting unit for detecting a cursor move operation; and a focus changing unit for making another one out of the plurality of icons be in focus based on the cursor move operation detected by the cursor move operation detecting unit, where the determination operation detecting unit detects a determination operation performed on the other one out of the plurality of icons in focus.

With such a construction, the cursor (icon in focus) is moved based on the interactive operation. This enables cursor moves with the use of cross keys.

The above terminal apparatus may further include: a rank setting unit for setting ranks of the m pieces of image information stored in the cache unit based on possibility of being displayed; and a cache table registering unit for registering identifiers of high ranking s pieces of image information in a cache table, out of the m pieces of image information and registering identifiers of t pieces of navigation information corresponding to the high ranking s pieces of image information, where the receiving unit receives the s pieces of image information whose identifiers are registered by the cache table registering unit and receives t pieces of navigation information corresponding to the s pieces of image information.

With such a construction, a certain number of pieces of image information having possibility of being displayed are stored in the cache unit. Therefore, these pieces of image information and corresponding navigation

information are displayed with high probability.

The above terminal apparatus may further include: a weighting unit for weighting, with a highest value, the one out of the plurality of icons made to be in focus by the focus setting unit, and for weighting, with a second highest value, icons adjacent to the one in focus, where the rank setting unit sets ranks of the m pieces of image information based on values weighted by the weighting unit.

With such a construction, information related to the icon in focus and the adjacent icons is stored in the cache unit. Therefore, these pieces of image information and corresponding navigation information are displayed with high probability.

The above terminal apparatus may further include: a statistics value storing unit for storing a statistics value for each piece of image information which indicates a number of times the piece of image information has been determined, where the rank setting unit sets ranks of the m pieces of image information based on the statistics value for each piece of image information.

With such a construction, the possibility of being displayed is evaluated based on the statistics values. Therefore, these pieces of image information and corresponding navigation information are displayed with high probability.

The above terminal apparatus may further include: a rank information detecting unit for detecting a piece of rank information from the piece of navigation information corresponding to the one out of the m pieces of image information reproduced by the reproducing unit, where the piece of rank information includes ranks of the plurality pieces of link-target image information, where the rank setting unit sets ranks of the m pieces of image information based on the piece of rank information.

With such a construction, the possibility of being displayed is evaluated based on the rank included in each piece of navigation information. Therefore, these pieces of image information and corresponding navigation information are displayed with high probability.

#### BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects, advantages and features of the invention will become apparent from the following description thereof taken in conjunction with the accompanying drawings which illustrate a specific embodiment of the invention. In the drawings:

FIG.1A shows a pictorial view of a satellite broadcasting system;

FIG.1B shows the construction of the transport stream which is divided into a number of transport packets;

FIG.2A shows the first frame of video element[1] and a corresponding voice in audio element[1], both included in presentation stream[1];

FIG.2B shows the first frame of video element[2] and a corresponding voice in audio element[2], both included in presentation stream[2];

FIG.2C shows the first frame of video element[12] and a corresponding voice in audio element[12], both included in presentation stream[12];

FIG.2D shows the first frame of video element[43] and a corresponding voice in audio element[43], both included in presentation stream[43];

FIG.3 shows the content of NVT[1];

FIG.4 shows the content of NVT[2];

FIG.5 shows the content of NVT[12];

FIG.6 shows the content of PMT;

FIG.7 shows a tree structure formed with NVTs and "contents;"

FIG.8A shows an appearance of the viewing system for satellite broadcasting;

FIG.8B shows the front panel of handy remote controller 4;

FIG.9 shows the construction of terminal apparatus 2;

FIGs.10A-10G show contents of navigation cache unit 14;

FIGs.11A-11G show contents of presentation cache unit 15;

FIG.12 shows a statistics table stored in statistics table storing unit 18;

FIG.13A shows a cache table which is generated based on the statistics table;

FIG.13B shows a cache table which is generated based on the "rank" column in the hyperlink table;

FIG.13C shows a cache table which is generated based on the icon currently in focus;

FIG.14 shows the main flowchart of the operation of cache manager 17;

FIG.15 shows the flowchart of cache manager 17 in reading contents in advance;

FIG.16 shows the flowchart of cache manager 17 in generating the cache table;

FIG.17 shows the flowchart of cache manager 17 in reading contents in advance;

FIG.18 shows the main flowchart of the operation of browser 25;

FIG.19 the flowchart of browser 25 in switching interactive screens;

FIG.20 the flowchart of browser 25 in switching interactive screens;

FIG.21 the flowchart of browser 25 in switching interactive screens;

FIG.22A shows an interactive screen which is an image generated from presentation stream[1] with the icons of NVT[1] superimposed on the image;

FIG.22B shows an interactive screen which is an image generated from presentation stream[2] with the icons of NVT[2] superimposed on the image;

FIG.22C shows an interactive screen which is an image generated from presentation stream[12] with the icons of NVT[12] superimposed on the image;

FIG.22D shows an interactive screen which is an image generated from presentation stream[43] with the icons of NVT[43] superimposed on the image;

FIG.23 shows the contents of the transport streams including still pictures;

FIG.24A shows the content of VET[15];

FIG.24B shows the content of VET[16]; and

FIG.25 shows a content of the hyperlink table.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

### <First Embodiment>

To achieve an interactive TV broadcasting system connected to a large number of terminal apparatuses set in a number of households, it is not ideal to allow the terminal apparatuses to send requests for transmitting images. The present embodiment achieves an interactive TV broadcasting system in which requests for transmitting images are not sent from the terminal apparatuses. In the present embodiment, a TV broadcasting station sends a plurality of images to a plurality of terminal apparatuses so that the terminal apparatuses each can interactively select and receive a desired image.

In such a broadcasting system, the interactivity is achieved by one-way image transmission since it is not necessary for the terminal apparatuses to send image transmission requests to the TV broadcasting station. On the other hand, the TV broadcasting station is required to send quite a large number of images to the terminal apparatuses since it must send all the necessary images for achieving the interactivity. When this happens, that is, when the number of sent images increases, the time taken to receive and display the images also increases.

FIG.1A shows a pictorial view of a satellite broadcasting system described in the present embodiment. As shown in this drawing, broadcasting station 100 transmits a broadcasting wave to broadcasting satellite 200, as indicated by dotted line h1. Broadcasting satellite 200 sends this broadcasting wave to a wide region on the earth, as indicated by dotted lines h2, h3, h4, and h5, so that terminal apparatuses in this region receive the broadcasting wave. Broadcasting station 100 and broadcasting satellite 200 repeat such transmissions in a unit cycle of several minutes. This enables a large number of terminal apparatuses in the region to receive the broadcasting wave.

The broadcasting wave mentioned above is a carrier wave which has been modulated from transport streams with the QPSK (Quadrature Phase Shift Keying) method.

Each of the transport streams is composed of various types of data, or multiple data. The transport stream is defined in detail in MPEG (Motion Picture Experts Group). A transport stream is composed of a large

number of transport packets. The transport packet is used for transmitting data and is the smallest unit of data whose transmission is assured. Each transport packet includes an error detection code and an error correction code.

FIG.1B shows the construction of the transport stream. The transport stream is represented by a horizontally-long rectangle in the upper part of the drawing, the transport stream being divided into a number of boxes representing transport packets.

The lower part of FIG.1B shows a plurality of sub-streams of the transport stream. The sub-streams are: a video elementary stream which is composed of video elements (represented each as "VE" in the drawing), an audio elementary stream which is composed of audio elements (represented each as "AE" in the drawing), a navigation information table (NVT) sub-stream which is composed of NVTs (represented each as "NVT" in the drawing), a program clock reference (PCR) table sub-stream (represented each as "PCR" in the drawing) for synchronizing the video elements with the audio elements, a program association table (PAT) sub-stream which is composed of PATs (represented each as "PAT" in the drawing), a program map table (PMT) sub-stream which is composed of PMTs (represented each as "PMT" in the drawing), a network information table (NIT) sub-stream which is composed of NITs (represented each as "NIT" in the drawing) for indicating which satellite is used to relay the transport packets, that is, for indicating to which network the transport packets belong, a service description table sub-stream (represented as "SDT" in the drawing) for indicating which program is broadcast by the transport packets, that is, for indicating to which service the transport packets belong, and an event information table (EIT) sub-stream which is composed of EITs (represented each as "EIT" in the drawing) for indicating to which channel, namely to which event, the transport packets belong. For more information on the above sub-streams, refer to ETS 300 468 standard (DVB-SI standard) and ISO/IEC 13818-1 (MPEG2 system standard).

As described above, transport streams, each including various types of data as shown in FIG.1B, are transmitted.

Each transport packet, which belongs to a video element or an audio element, includes a packet identifier (PID) which indicates to which element the transport packet belongs.

A plurality of video elements, audio elements, and PCRs make up a presentation stream which corresponds to one scene in a film.

VE[1], VE [2], VE[12], VE[43] ... in FIG.1B include their own PIDs. For example, VE[1] includes PID "0x202;" VE[2] includes PID "0x302."

FIGs.2A-2D show examples of audio elements and video elements making up a presentation stream.

Presentation stream[1] includes audio element[1] with PID "0x601" and video element[1] with PID "0x202."

FIG.2A shows a scene which is obtained by decoding video element[1]. In this scene, an announcer of a broadcasting company makes an introductory speech for about two-minutes. The video element[1] is accompanied by audio element[1] which includes a narration: "INTRODUCING INTERACTIVE CHANNEL. THANK YOU FOR SELECTING THE 'A' BROADCAST. FOR TODAY'S BROADCAST, WE WILL BE SHOWING THE FOLLOWING PROGRAMS. WE ARE SURE YOU WILL ENJOY THEM."

Presentation stream[2] includes audio element[2] with PID "0x602" and video element[2] with PID "0x302." FIG.2B shows a scene which is displayed by decoding video element[2]. The scene provides a preview of films to be released soon. The video element[2] is accompanied by audio element[2] which includes a narration: "NEW MOVIE INFORMATION. COMING UP SOON AT THEATERS IN OSAKA."

FIGs.2C and 2D respectively show the content of presentation streams[12] and [43]. Presentation streams[12] and [43] respectively include the shots and narrations shown in the drawings.

The "NVT" is important as a private section under ISO/IEC 13818-1 standard. Each private section can additionally include a "table\_id\_extension" which is called a table identifier. Each of NVTs[0], [1], [2], and [12] shown in FIG.1B, for example, includes a common PID, "0x0082." NVT [0] also includes table identifier "0x0000." NVT[1] includes table identifier "0x0001," NVT[2] table identifier "0x0002," and NVT[12] table identifier "0x0012." That means, a video element or an audio element identifies itself with a PID; an NVT identifies itself with a table identifier.

Now, the navigation information table (NVT) is described.

The NVT includes navigation information which is used for displaying icons on the screen and moving the icons based on interactive operations made with the operator. The icons in the present embodiment are any of patterns, characters, and colors, or combinations of these elements. The icons are used to inform the operator of the content of information, and is used as option items. A representative method of indicating a selected icon is a cursor display. The cursor display described here is a different color of one icon than the other icons displayed on the screen. This is an effective way for drawing the attention of the operator to the icon. The icon with the different color is also called an icon in focus. That means, as the cursor moves, the color of the icon also changes.

Now, the data structure of the NVT is described with reference to FIGs.3, 4, and 5.

FIG.3 shows the content of NVT[1] shown in FIG. 1B. FIG.4 shows the content of NVT[2] shown in FIG. 1B. FIG.5 shows the content of NVT[12] shown in FIG. 1B. Each NVT is composed of bit map table 301, object definition table 302, handler definition table 303, and hyperlink table 304. Each piece of information in each table

is related to each other. For example, a piece of information with index number 1 in the object definition table 302 is related to a piece of information with HD\_index number 1 in the handler definition table 303 as indicated by the HANDLER column, and further to a piece of information with HL\_index number 1 in the hyperlink table 304 as indicated by the "script" column. Such pieces of information in the NVT related to each other make up a piece of navigation information.

Bit map table 301 of NVT[1] shown in FIG.3 is composed of bitmap 1 used as an icon indicating "NEW MOVIE INFORMATION," bitmap 2 as an icon indicating "INTERNET LATEST INFORMATION," bitmap 3 as an icon indicating "EVENT INFORMATION," bitmap 4 as an icon indicating "PROGRAM PREVIEW," and bitmaps 101-104 which are copies of bitmaps 1-4 and are highlighted.

The bit map table of NVT[2] shown in FIG.4 is composed of bitmap 5 used as an icon indicating "THE TERROR OF THE HUGE TORNADO (DISTRIBUTED BY AAA COMPANY)," "THE RETURN OF THE MONSTROUS DINOSAURS (DISTRIBUTED BY BBB COMPANY)," "SPORTS WARS (DISTRIBUTED BY AAA COMPANY)," and "RETURN," and bitmaps 105-108 which are copies of bitmaps 5-8 and are highlighted.

While each of the bitmap tables of NVT[1] and NVT [2] includes four pieces of bitmap information, some bitmap tables include as many as 10 pieces of bitmap information. NVT[12] shown in FIG.5 provides an example of such a bitmap table.

Object definition table 302 is composed of a plurality pieces of object definition information which is used to define the icons included in the same NVT as objects. The object definition table 302 includes columns called "index," "type," "X-coordinate," "Y-coordinate," "HANDLER," "normal bitmap," and "focused\_bitmap."

The "index" column shows the index number of each piece of information included in the table.

The "type" column shows the object type. For example, each piece of information in the object definition table is specified as "Button" in the type column, which indicates that the icon has a characteristic as a button.

The values in the "X-coordinate" and "Y-coordinate" columns show the respective X and Y coordinates of the standard display position on the display screen. For example, X and Y coordinates of navigation information[1] are respectively x1=50 and y1=50; X and Y coordinates of navigation information[2] are respectively x2=100 and y2=50. The origin of the coordinate system is in the upper-left corner. Bitmap 1 representing the "NEW MOVIE INFORMATION" icon is displayed at a position specified by x1=50 and y1=50, an upper-left position on the screen. Bitmap 2 representing the "INTERNET LATEST INFORMATION" icon is displayed at a position specified by x2=100 and y2=50, an upper-right position on the screen.

The "HANDLER" column points out an HD\_index number in the handler definition table 303. The informa-

tion with the HD index number includes a script as shown in the "script" column which shows a link-target "content" by the HL index number in the hyperlink table 304, where a "content" is composed of a NVT, a video element, and an audio element.

The "normal\_bitmap" column shows bit maps among those included in the bit map table which are displayed normally on the screen.

The "focused\_bitmap" column shows bit maps among those included in the bit map table which are displayed highlighted on the screen.

The handler definition table 303 includes columns called "HD\_index" and "script."

The "HD\_index" column shows the HD\_index number of each piece of information included in the table.

The "script" column shows a script included in each piece of information included in the table. Every piece of information the handler definition table 303 shown in FIG.3 includes "goto\_content" statement. The "goto\_content" statement instructs the terminal apparatus to fetch a piece of hyperlink information specified in the statement from the hyperlink table 304 and to obtain an NVT, video element, and audio element according to the hyperlink information.

The hyperlink table 304 includes a column called "HL index" and 11 columns which are information elements used to identify the link-target content. This is because detailed information is required to specify a link target content among the vast amount of information provided in the digital broadcasting system.

The "HL\_index" column shows the HL\_index number of each piece of information included in the table.

The "orig\_nw\_id" column shows which satellite is used to relay the link-target NVT, video element, and audio element. In other words, the "orig\_nw\_id" column shows to which network the link-target NVT, video element, and audio element belong.

The "ts\_id" column shows which transport stream is used to transfer the link-target content.

The "VE\_svc\_id" column shows to which TV program (service) the link-target video element belongs among a plurality of TV programs included in the transport stream.

The "VE\_event\_id" column shows to which broadcasting channel (event) the TV program of the link-target video element belongs.

The "VE\_comp\_tag" column shows which component tag is attached to the link-target video element, where the component is a stream identified by a PID (packet identifier) as defined in the MPEG2 standard. In the present embodiment, a video element or an audio element may be a component since each of these elements includes its own PID. In case a group of video elements or audio elements are assigned one PID, the group is regarded as one component.

The "AE\_svc\_id" column shows to which TV pro-

gram (service) the link-target audio element belongs among a plurality of TV programs included in the transport packet.

The "AE\_event\_id" column shows to which broadcasting channel (event) the TV program including of the link-target audio element belongs.

The "AE\_comp\_tag" column shows which component tag is attached to the link-target audio element.

The "NE\_svc\_id" column shows to which TV program (service) the link-target NVT belongs among a plurality of TV programs included in the transport stream.

The "NE\_event\_id" column shows to which broadcasting channel (event) the TV program of the link-target NVT belongs.

The "NE\_id\_EXT" column shows which table identifier ("table\_id\_extension") is attached to the link-target NVT.

The "rank" column shows a rank of the link-target video element, audio element, and NVT, the rank being determined by the broadcasting station according to the frequency of display or the like. In FIG.3, for example, a piece of information in the hyperlink table 304 with HL\_index number 1 (hereinafter, represented as HL\_index[1]) has the highest rank, "2," followed by HL\_index[2], HL\_index [3], and HL\_index [4]. The rank may be determined according to answers to questionnaires distributed by the broadcasting company, or according to fashions or topics in recent years.

FIG.6 shows the content of the PMT (Program Map Table). The PMT includes columns called "PID," "stream\_type," and "descriptor."

The "PID" column shows PIDs (Packet IDentifiers).

The "stream\_type" column shows a type of each stream.

The "descriptor" column shows a stream descriptor "stream\_identifier\_descriptor" including a component tag corresponding to each PID. For example, stream descriptor "stream\_identifier\_descriptor" including component tag "0x0002" is related to "PID0x0302." Stream descriptor "stream\_identifier\_descriptor" including component tag "0x0003" is related to "PID0x0303." The PMT is required for the terminal apparatus to obtain a PID of a transport packet from a component tag of a link-target video element or a link-target audio element obtained from the hyperlink table.

A link-target NVT, video element, or audio element is obtained as follows based on the hyperlink table in NVT and PMT.

#### <Specifying Link-Target NVT>

The "HANDLER" column of the object definition table 302 in NVT specifies one HD\_index number of the handler definition table 303. By referring to the script for the obtained HD index number, one HL\_index number of the hyperlink table 304 is obtained. By referring to the "NE\_id\_EXT" column of the table 304, the table identifier attached to the link-target NVT is obtained.

1-1 When bitmap1 of NVT[1] related to the icon indicating "NEW MOVIE INFORMATION" is determined:

HL\_index "1" → NE\_id\_EXT[0x0002] → NVT [2] including table identifier "0x0002" (refer to FIG. 1B for NVT[2] with the table identifier)

1-2 When bitmap2 of NVT[1] related to the icon indicating "INTERNET LATEST INFORMATION" is determined:

HL\_index "2" → NE\_id\_EXT[0x0003] → NVT [3] including table identifier "0x0003" (refer to FIG. 1B)

1-3 When bitmap3 of NVT[1] related to the icon indicating "EVENT INFORMATION" is determined:

HL\_index "3" → NE\_id\_EXT[0x0004] → NVT [4] including table identifier "0x0004" (refer to FIG. 1B)

1-4 When bitmap4 of NVT[1] related to the icon indicating "PROGRAM PREVIEW" is determined:

HL\_index "4" → NE\_id\_EXT[0x0005] → NVT (5) including table identifier "0x0005" (refer to FIG. 1B)

#### <Specifying Link-Target Video Element>

The "HANDLER" column of the object definition table 302 in NVT specifies one HD\_index number of the handler definition table 303. By referring to the script for the obtained HD index number, one HL\_index number of the hyperlink table 304 is obtained. By referring to the "VE\_comp\_tag" column of the table 304, the component tag attached to the link-target video element is obtained. By referring to the "descriptor" column of the PMT, the PID attached to the link-target video element is obtained.

2-1 When bitmap1 of NVT[1] related to the icon indicating "NEW MOVIE INFORMATION" is determined:

HL\_index "1" → VE\_comp\_tag[0x0002] → PID[0x0302] → VE[2] (refer to FIG.1B)

2-2 When bitmap2 of NVT[1] related to the icon indicating "INTERNET LATEST INFORMATION" is determined:

HL\_index "2" → VE\_comp\_tag[0x0003] → PID[0x0303] → VE[3] (refer to FIG.1B)

2-3 When bitmap3 of NVT[1] related to the icon indicating "EVENT INFORMATION" is determined:

HL\_index3 → VE\_comp\_tag[0x0004] → PID [0x0304] → VE[4] (refer to FIG.1B)

2-4 When bitmap4 of NVT[1] related to the icon indicating "PROGRAM PREVIEW" is determined:

HL\_index4 → VE\_comp\_tag[0x0005] → PID [0x0305] → VE[5] (refer to FIG.1B)

#### <Specifying Link-Target Audio Element>

The "HANDLER" column of the object definition ta-

ble 302 in NVT specifies one HD\_index number of the handler definition table 303. By referring to the script for the obtained HD index number, one HL\_index number of the hyperlink table 304 is obtained. By referring to the "AE\_comp\_tag" column of the table 304, the component tag attached to the link-target audio element is obtained. By referring to the "descriptor" column of the PMT, the PID attached to the link-target audio element is obtained.

2-1 When bitmap1 of NVT[1] related to the icon indicating "NEW MOVIE INFORMATION" is determined:

HL\_index "1" → AE\_comp\_tag[0x0102] → PID[0x0602] → AE[2] (refer to FIG.1B)

2-2 When bitmap2 of NVT[1] related to the icon indicating "INTERNET LATEST INFORMATION" is determined:

HL\_index "2" → AE\_comp\_tag[0x0103] → PID[0x0603] → AE[3] (refer to FIG.1B)

2-3 When bitmap3 of NVT[1] related to the icon indicating "EVENT INFORMATION" is determined:

HL\_index3 → AE\_comp\_tag[0x0104] → PID[0x0604] → AE[4] (refer to FIG.1B)

2-4 When bitmap4 of NVT[1] related to the icon indicating "PROGRAM PREVIEW" is determined:

HL\_index4 → AE\_comp\_tag[0x0105] → PID[0x0605] → AE[5] (refer to FIG.1B)

As will be understood from the above description, NVT[1] specifies NVT[2], VE[2], and AE[2] as the link-targets. Such a group of a NVT, a video element, and an audio element specified as link-targets are called a "content." A link-target content is specified by an NVT. Then, another link-target is specified by the NVT of the content. In this way, NVT-content relation is constructed.

FIG.7 shows a tree structure formed with NVTs and "contents" in the present embodiment. The plurality of arrows shown in the drawing indicate the direction of the links. Note that the root of the tree is called "root content."

FIG.7 indicates that content[1] includes VE[1], AE[1], and NVT[1] (in the drawing, VE[1] and AE[1] is represented as "VE\_AE[1].") Hereinafter, a combination of VE and AE included in a content is represented as "VE\_AE"). This indicates that when presentation stream [1] is decoded to generate a shot image, the bit maps of NVT[1] are superimposed on the shot image.

Similarly, content[2] includes VE[2], AE[2], and NVT[2]. This indicates that when presentation stream[2] is decoded to generate an image of the preview of films, the bit maps of NVT[2] are superimposed on the image.

A screen which is composed of an image generated from a presentation stream with icons superimposed on the image is called an interactive screen. FIGs.22A-22D show interactive screens. FIG.22A, for example, shows an interactive screen which is an image generated from presentation stream[1] with the icons of NVT[1] superimposed on the image.

The transport stream constructed as shown above is repeatedly transmitted from broadcasting station 100 to the terminal apparatuses, as shown in FIG.1A. Accordingly, the terminal apparatuses can obtain necessary streams or tables. Note that the terminal apparatuses must wait for each cycle period of the transmission for obtaining the necessary streams or tables.

Now, a system for viewing programs which are broadcast with transport streams is described. FIG.8A shows an appearance of the viewing system which is composed of parabolic antenna 1, terminal apparatus 2, TV receiver 3, and handy remote controller 4.

Parabolic antenna 1 which is set outside a house is used to receive carrier waves of the transport streams transmitted by the broadcasting satellite.

Terminal apparatus 2 fetches transport streams from the carrier waves received by parabolic antenna 1, and decodes the transport streams to NTSC or PAL image signals and stereo audio signals (hereinafter, a combination of an image signal and an audio signal is called an AV signal).

TV receiver 3 outputs images and voices according to the AV signals decoded by terminal apparatus 2.

Handy remote controller 4, while TV receiver 3 outputs images and voices, receives instructions from the operator and outputs infrared ray signals representing the received instructions to terminal apparatus 2.

FIG.8B shows the keys arranged on handy remote controller 4. Handy remote controller 4 includes cross key 41 for moving the cursor, ten keys 42 for specifying numerals for selection, and enter key 43 for determining icons and the like.

The construction of the terminal apparatus is described with reference to FIG.9. The terminal apparatus is composed of demodulator 10, TS decoder 11, AV decoder 12, AV decoder controlling unit 13, navigation cache unit 14, presentation cache unit 15, operation detecting unit 16, cache manager 17, statistics table storing unit 18, mode managing unit 19, cache table storing unit 20, cache processing unit 21, input switching unit 22, graphic storing unit 23, graphic displaying unit 24, and browser 25.

Demodulator 10 demodulates a carrier wave, which is sent from the broadcasting station and is received by the CS antenna, to obtain transport packets, and outputs the obtained transport packets to TS decoder 11.

TS decoder 11 separates the transport packets which belong to the video elementary stream or the video elementary stream from those output by demodulator 10, and outputs the separated transport packets to input switching unit 22 at the side of AV decoder 12. When a table identifier is specified from browser 25, TS decoder 11 detects a transport packet which has the specified table identifier among the plurality of transport packets of the table sub-stream, and outputs the detected transport packet to cache processing unit 21 at the side of browser 25.

AV decoder 12, when input switching unit 22 outputs



a transport packet of video elementary stream or video elementary stream and a PID is specified by the AV decoder controlling unit 13, decodes the transport packet, the video element, and the audio element to generate an AV signal synchronizing them with PCR. In generating the AV signal by decoding, when browser 25 outputs the bit maps included in an NVT and when AV decoder controlling unit 13 instructs AV decoder 12 to superimpose the bit maps on the image, AV decoder 12 superimposes the bit maps output from browser 25 onto the decoded image, and outputs the combined image to an AV terminal of the TV receiver as the AV signal.

AV decoder controlling unit 13, when browser 25 outputs a PID and an instruction for decoding the video element and audio element corresponding to the PID, instructs AV decoder 12 to decode the video element and the audio element by referring to the PID. When browser 25 outputs an instruction for superimposing the bit maps onto the image of the video element, AV decoder controlling unit 13 instructs AV decoder 12 to superimpose the bit maps onto the image of the video element. AV decoder controlling unit 13 also instructs AV decoder 12 to change the color of a part of the bit maps in display if browser 25 instructs so.

Navigation cache unit 14, which include memories enabling high-speed access, stores, among a plurality of NVTs included in transport streams, every NVT which has bit maps that may be displayed and all the NVTs whose bit maps having been displayed. Navigation cache unit 14 includes storage areas for storing NVTs, the storage areas having sequence numbers 1, 2, 3, 4, 5, and 6 and display history marks for indicating whether the bit maps of the stored NVT are displayed (hit or missed).

FIG. 10A shows the content of navigation cache unit 14 when the interactive screen shown in FIG. 22A is displayed. As shown in FIG. 22A, the interactive screen displays icons indicating "NEW MOVIE INFORMATION," "INTERNET LATEST INFORMATION," "EVENT INFORMATION," and "PROGRAM PREVIEW," waiting for the operator to input instructions for moving the cursor or for determining a selected icon. According to the content of navigation cache unit 14, it is recognized that NVT[1] whose icons are currently displayed has a mark indicating a hit. The drawing also indicates that navigation cache unit 14 has already stored NVT[2], NVT[3], NVT[4], and NVT[5]. Those NVTs are specified by the handler definition table 303 and hyper table 304 of NVT [1]. When the operator determines one out of the icons indicating "NEW MOVIE INFORMATION," "INTERNET LATEST INFORMATION," "EVENT INFORMATION," and "PROGRAM PREVIEW," the corresponding one out of NVTs[2]-[5] is displayed on the screen.

As will be understood from the above description, navigation cache unit 14 stores NVT[2], NVT [3], NVT [4], and NVT[5] whose bit maps may be displayed next after the current screen shown in FIG. 22A.

FIG. 10D shows the content of navigation cache unit

14 when the interactive screen shown in FIG. 22B is displayed. As shown in FIG. 22B, the interactive screen displays icons indicating "THE TERROR OF THE HUGE TORNADO (DISTRIBUTED BY AAA COMPANY)," "THE RETURN OF THE MONSTROUS DINOSAURS (DISTRIBUTED BY BBB COMPANY)," "SPORTS WARS (DISTRIBUTED BY AAA COMPANY)," and "RETURN," waiting for the operator to input instructions for moving the cursor or for determining a selection. According to the content of navigation cache unit 14, it is recognized that NVT[1] whose bit maps having been displayed and NVT[2] whose bit maps are currently displayed respectively have a mark indicating a hit. The drawing also indicates that navigation cache unit 14 has already stored NVT[11], NVT[12], and NVT[21]. Those NVTs are specified by the handler definition table and hyper table of NVT[2]. That is, navigation cache unit 14 stores NVT[11], NVT[12], and NVT[21] that may be displayed next after the current screen shown in FIG. 22B.

FIG. 10G shows the content of navigation cache unit 14 when the interactive screen shown in FIG. 22C is displayed. The interactive screen including the bit maps of NVT[12] is shown in FIG. 22C. According to the content of navigation cache unit 14, it is recognized that NVT [12] whose bit maps are currently displayed has a mark indicating a hit. The drawing also indicates that navigation cache unit 14 has already stored NVT[41], NVT[42], NVT[43], and NVT[44]. NVTs [41]-[44] are specified by the handler definition table and hyper table of NVT[12]. That is, navigation cache unit 14 stores NVTs [41]-[44] that may be displayed next after the current screen shown in FIG. 22C.

Note that the procedure for storing the above NVTs in navigation cache unit 14, as shown in FIGs. 10A, 10D, and 10G, will be described later.

Presentation cache unit 15 is a memory, as navigation cache unit 14, enabling high-speed accesses. Presentation cache unit 15 stores, among a plurality of presentation streams included in transport streams, every presentation stream which has a possibility of being displayed and all the presentation streams having been displayed. Navigation cache unit 15 includes storage areas for storing presentation streams, the storage areas having sequence numbers 1, 2, 3, 4, 5, and 6 and display history marks for indicating whether each stored presentation stream is displayed (hit or missed). Each of the storage areas also has identification information indicating how image information is stored in the storage area, that is, whether the whole image is stored or whether only the first frame is stored.

FIG. 11A shows the content of presentation cache unit 15 when the interactive screen shown in FIG. 22A is displayed. According to the content of presentation cache unit 15, it is recognized that currently displayed presentation stream[1] has a mark indicating a hit. The drawing also indicates that presentation cache unit 15 has already stored presentation stream[2], presentation stream[3], presentation stream[4], and presentation

stream[5]. Those presentation streams are specified by the handler definition table and hyper table of NVT[1]. When the operator determines one out of icons indicating "NEW MOVIE INFORMATION," "INTERNET LATEST INFORMATION," "EVENT INFORMATION," and "PROGRAM PREVIEW," the corresponding one of presentation streams[2]-[5] is displayed on the screen.

As will be understood from the above description, presentation stream cache unit 15 stores presentation stream[2], presentation stream[3], presentation stream [4], and presentation stream[5] that may be displayed next after the current screen shown in FIG.22A.

FIG.11D shows the content of presentation cache unit 15 when the interactive screen shown in FIG.22B is displayed. According to the content, it is recognized that presentation stream[1] having been displayed and presentation stream[2] currently displayed respectively have a mark indicating a hit. The drawing also indicates that presentation cache unit 15 has already stored presentation stream[11], presentation stream[12], and presentation stream[21]. That is, presentation cache unit 15 stores presentation stream[11], presentation stream [12], and presentation stream[21] that may be displayed next after the current screen shown in FIG.22B. Those presentation streams are specified by the handler definition table and hyper table of NVT[2].

FIG.11G shows the content of presentation cache unit 15 when the interactive screen shown in FIG.22C is displayed. According to the content, it is recognized that presentation cache unit 15 has already stored presentation streams[41]-[44]. That is, presentation cache unit 15 stores presentation streams[41]-[44] that may be displayed next after the current screen shown in FIG. 22C. Those presentation streams are specified by the handler definition table and hyper table of NVT[12].

Operation detecting unit 16 receives an infrared ray signal from handy remote controller 4 and detects an operation instruction from the received infrared ray signal. The operation instruction specifies such operations as follows: moving the cursor (when cross key 41 is pressed); and determining an icon (when enter key 43 is pressed). Operation detecting unit 16 outputs the detected operation instruction to browser 25.

Cache manager 17, when an icon is determined on the current screen and the next interactive screen is displayed, obtains a plurality of contents that may be displayed after the "next interactive screen." Cache manager 17, while operation detecting unit 16 waits for an operation instruction to be input on the "next interactive screen," instructs TS decoder 11 to receive presentation streams and NVTs with higher ranks to be displayed which have not been stored in navigation cache unit 14 or presentation cache unit 15, and instructs cache processing unit 21 to store the received presentation streams in presentation cache unit 15 and to store the received NVTs in navigation cache unit 14.

The presentation streams and NVTs that may be displayed next are determined by cache manager 17 as

follows: cache manager 17 refers to the hyperlink table of the current NVT to determine the link-target contents, namely interactive screens that may be called from the related icons being displayed, then determines the presentation streams and NVTs belonging to the contents.

The presentation streams and NVTs with higher ranks to be displayed are determined as follows: cache manager 17 determines these presentation streams and NVTs based on (1) the statistics table showing the frequency in determination for each presentation stream and NVT, (2) the "rank" column in the hyperlink table of NVTs, (3) the icon currently in focus.

The presentation streams and NVTs with higher ranks need be determined since some NVTs may include as many icons as cannot be stored in navigation cache unit 14. It is required that as many icons as can be stored in navigation cache unit 14 are selected among those included in such NVTs. This is the same for presentation cache unit 15.

Suppose the maximum number of NVTs and presentation streams that can be stored in navigation cache unit 14 and presentation cache unit 15 is five respectively. In this case, the link-target presentation streams [2]-[5] and NVTs[2]-[5] of NVT[1] can respectively be stored in navigation cache unit 14 and presentation cache unit 15. On the other hand, all of the link-target presentation streams[41]-[49] and NVTs[41]-[49] of NVT[12] cannot be stored in navigation cache unit 14 and presentation cache unit 15. Thus, the necessity for selecting NVTs and presentation streams.

In addition, presentation streams and NVTs which have not been stored in navigation cache unit 14 or presentation cache unit 15 are selected. This is because once a presentation stream or an NVT is stored in each unit, it is not deleted and kept to be stored (this will be described later). Accordingly, this operation is performed not to repeat the same operation of storing presentation streams or NVTs in the units.

The maximum number of NVTs and presentation streams that can be stored in navigation cache unit 14 and presentation cache unit 15 are determined based on the time required to store all the NVTs and presentation streams. This is because NVTs and presentation streams are repeatedly sent and that receiving a desired data takes as much wait time as the cycle period of repetition. The wait time increases as the number of NVTs and presentation streams to be received increases. Therefore, it may happen that the storing of NVTs and presentation streams does not end if the number is too great. As a result, it is desirable to calculate the wait time and to limit the number of NVTs and presentation streams to be stored not to exceed the presumed wait time.

Statistics table storing unit 18 stores the statistics table that shows the frequency in determination for each presentation stream and NVT. FIG. 12 shows a statistics table stored in statistics table storing unit 18. As shown in FIG.12, the statistics table includes the statistics val-

ue for each NVT which is the number of determinations of the past. Note that the mean value on daily basis or time-of-the-day basis or standard deviation may be used instead of the number of determinations.

Mode managing unit 19 manages the cache mode which indicates the best one among: (1) the statistics table, (2) the "rank" column in the hyperlink table, and (3) the icon currently in focus so that the best cache mode is used by cache manager 17 in generating the cache table. Mode managing unit 19 changes the cache mode according to the state of the terminal apparatus.

Cache table storing unit 20 stores the cache table generated by cache manager 17.

Cache manager 17 determines the presentation streams and NVTs to included in the cache table based on (1) the statistics table, (2) the "rank" column in the hyperlink table, and (3) the icon currently in focus, and generates the cache table. FIGs.13A-13C show cache tables.

FIG.13A shows a cache table which is generated based on the statistics table shown in FIG.12. The cache table shows the highest ranking link-target contents among those specified in the hyperlink table of NVT[12].

FIG.13B shows a cache table which is generated based on the "rank" column in the hyperlink table shown in FIG.5C. The cache table shows the highest ranking link-target content among those specified in the hyperlink table of NVT[12].

FIG.13C shows a cache table which is generated based on the icon currently in focus. More specifically, when a plurality of icons are displayed on the current screen, the possible link targets for each icon currently displayed are evaluated by weighting the icon in focus with the highest value and by weighting icons adjacent to the icon in focus with the second highest value.

While the cache table shown in FIG.13A includes contents[41]-[45], the cache table shown in FIG.13B includes contents[45], [47], [46], [43], and [44]. This example indicates that the contents of the cache table may greatly change depending on the cache mode.

Cache processing unit 21 manages the start address and end address of each area in navigation cache unit 14 and presentation cache unit 15. Cache processing unit 21 increases or decreases the capacity of each area in navigation cache unit 14 and presentation cache unit 15 according to the size of the NVT or the presentation stream to be stored in the area. In doing so, cache processing unit 21 also performs writing, reading, or a garbage collection.

In the writing, cache processing unit 21 writes an NVT output from TS decoder 11 and a presentation stream output from input switching unit 22 respectively in navigation cache unit 14 and presentation cache unit 15 at areas closer to the start of each unit.

Cache processing unit 21, on receiving a read request from cache manager 17, reads the requested NVT or presentation stream from navigation cache unit 14 or presentation cache unit 15, then outputs the read NVT

to browser 25 and the read presentation stream to input switching unit 22.

In the garbage collection, cache processing unit 21 puts a mark indicating a hit on a presentation stream or an NVT when the presentation stream or the NVT is displayed; cache processing unit 21 deletes the rest of the presentation streams or NVTs. When free areas exist between the areas for the hit presentation streams or NVTs, cache processing unit 21 moves the hit presentation streams or NVTs so that free areas are arranged in sequence.

Input switching unit 22 transfers the transport packets of the video elementary stream and the video elementary stream received by TS decoder 11 to AV decoder 12. Input switching unit 22 transfers the transport packets of the video elementary stream and the video elementary stream to presentation cache unit 15 when input switching unit 22 receives a switch instruction from cache manager 17 for switching the transfer target from AV decoder 12 to presentation cache unit 15.

Input switching unit 22, on receiving a switch instruction from cache manager 17 for using the transport packets in presentation cache unit 15, reads the transport packets from presentation cache unit 15 and transfers the read transport packets to AV decoder 12.

Graphic storing unit 23 stores the bit map for informing the operator of a display break. In this embodiment, the bit map represents a character sequence indicating "WAIT FOR A MOMENT."

Graphic displaying unit 24 outputs the character sequence indicating "WAIT FOR A MOMENT" stored in graphic storing unit 23 to AV decoder 12 when there is no NVT with a bit map that can be displayed.

Browser 25 fetches PIDs of link-target video element and audio element by referring to the hyperlink table and PMT based on the above procedures: <Specifying Link-Target NVT>, <Specifying Link-Target Video Element>, and <Specifying Link-Target Audio Element>, and outputs the fetched PIDs to AV decoder 12 via AV decoder controlling unit 13. Browser 25 also instructs AV decoder 12 to decode the video element and audio element related to the fetched PIDs to generate one AV signal.

Browser 25, when TS decoder 11 outputs a transport packet of the NVT sub-stream, fetches bit maps from the transport packet and outputs the bit maps to AV decoder 12, with an instruction for combining the bit maps with the image. Browser 25 executes a processing program included in the navigation information. With this execution, the bit maps are displayed on the screen. Browser 25 instructs AV decoder controlling unit 13 to change the color of icons when the operator performs a cursor move operation.

Now, the operation of the terminal apparatus is described below with reference to flowcharts shown in FIGs.14-17 on cache manager 17 and in FIGs.18-21 on browser 25. This is because cache manager 17 and browser 25 take important parts among the above men-

tioned components in the operation of the terminal apparatus which is mainly achieved by software.

In step S51 of the flowchart shown in FIG. 14, cache manager 17 sets variable p to the root number. Here, the variable p indicates an index number of a "content," NVT, video element, or audio element to be read, and the root number indicates an index number of a "content," NVT, video element, or audio element which is at the root of the tree structure which is uniquely defined by PAT and PMT. In the present example shown in FIG. 7, the root number is specified as "1."

Suppose variable p is set to "1" in step S51. In step S52, demodulator 10 and TS decoder 11 receive presentation stream[p] and NVT[p] and store them in presentation cache unit 15 and navigation cache unit 14 respectively.

Step S53 is described in detail in the flowchart shown in FIG. 15. Note that the flowcharts shown in FIGs. 15-17 show processing procedures for the contents one generation later than content[p]. Here, "the contents one generation later than content[p]" indicates that content[p] links to "the contents one generation later than content[p]" in the tree structure in which a content is linked from the NVT of the previous content. In this case, contents one generation later than content[1] are contents[2], [3], [4], and [5]. Similarly, contents two generations later than content[1] are contents[11], [12], [21], [22], [23], [32]..., as shown in FIG. 7.

In step S60 of FIG. 15, initial values are set for the index number and the cache end flag. Here, index number is a variable specifying each content in the cache table. Suppose in the present embodiment, the initial value of the index number is set to "1." When the cache end flag is "1," it indicates that the NVT and presentation stream have been stored. When the cache end flag is "0," it indicates that the NVT and presentation stream have not been stored. Suppose in the present embodiment, the initial value of the cache end flag is set to "1." Note that in the following description, each of a plurality pieces of information included in one NVT is represented as "NVT.NAVI."

Step S61 is described in detail in the flowchart shown in FIG. 16.

In step S77 of FIG. 16, cache manager 17 obtains a cache mode which is managed by mode managing unit 19.

In step S78, it is judged whether the cache mode is that of statistics value. If it is judged as yes, control goes to step S80. In step S80, s higher ranking contents among those ranging from content(NVT[p].NAVI[START].link destination) to content(NVT[p].NAVI[END].link destination) are registered in the cache table, based on the statistics value.

If it is judged as no in step S78, control goes to step S79. In step S79, it is judged whether the cache mode is that of the "rank" column in the hyperlink table. If it is judged as yes, control goes to step S81. In step S81, s higher ranking contents among the contents from con-

tent(NVT[p].NAVI[START].link destination) to content(NVT[p].NAVI[END].link destination) are registered in the cache table, based on the "rank" column in the hyperlink table.

If it is judged as no in step S79, control goes to step S82. In step S82, the cache table is generated, in which: a content including the icon currently in focus is determined as rank 1; a content including an icon in the right or left hand side of the icon in focus is determined as rank 2; a content including an upper or lower icon of the icon in focus is determined as rank 3; and a content including an icon in a slanting direction from the icon in focus is determined as rank 4.

Note that in an initial stage after the terminal apparatus has been activated, a substantially effective ranking cannot be expected for the cache modes of statistics value and the icon currently in focus. Accordingly, the initial cache mode is set to that of the "rank" column in the hyperlink table by mode managing unit 19. Thus, in the present embodiment, it is judged as no in step S78 and yes in step S79, and control goes to step S81.

In step S81, s higher ranking contents among the contents from content(NVT[p].NAVI[START].link destination) to content(NVT[p].NAVI[END].link destination) based on the "rank" column in the hyperlink table are registered in the cache table. More specifically, four higher ranking contents among the contents from content(NVT[1].NAVI[START].content [2]) to content(NVT[p].NAVI[END].content[5]), determined based on the "rank" column in the hyperlink table, namely contents [2]-[5], are registered in the cache table in the order of the ranking. From steps of the flowchart shown in FIG. 16, control returns to step S62 in the flowchart of FIG. 15.

In step S62, content[q] in the cache table at the position of the index number is obtained. Suppose the cache table generated through the procedures of FIG. 16 includes contents[2], [3], [4], and [5]. Since in this case, the index number is "1," the first content in the cache table, namely, content[2] is obtained by cache manager 17. Then, in step S63, variable q is substituted for variable p. In step S64, NVT[p], video element[p], audio element[p], and the PCR of content[p] are obtained.

In step S65, it is judged whether navigation cache unit 14 includes a free area with enough capacity for storing NVT[p]. If not, control goes to step S67. In step S67, NVT[p] is stored in a marked area storing the oldest NVT. In the present case, since variable p is "2" and navigation cache unit 14 includes a free area with enough capacity for storing NVT[2], it is judged as yes in step S65, allowing the control to go to step S66. In step S66, NVT[2] is stored in navigation cache unit 14.

In step S83 in the flowchart of FIG. 17, the PIDs of video element[p] and audio element[p] of presentation stream[p] are obtained. Then, in step S84, the obtained PIDs are set in the TS decoder. input switching unit 22 changes the destination of the output from input switching unit 22 to presentation cache unit 15, then Video el-

ement[p] and audio element[p] are output to input switching unit 22. In this way, transport packets of the video elementary stream and video elementary stream start to be received. Cache manager 17 judges whether presentation cache unit 15 includes a free area with enough capacity for storing presentation stream[p] in step S85.

In the present case, since variable p is "2," and presentation cache unit 15 includes a free area with enough capacity for storing NVT[2], it is judged as yes in step S85, allowing the control to go to step S86. In step S86, cache manager 17 stores presentation stream[2] in presentation cache unit 15.

If it is judged as no in step S85, control goes to step S95. In step S95, it is judged whether presentation cache unit 15 includes a free area with enough capacity for storing the first frame of presentation stream[p]. If judged as yes, control goes to step S96. In step S96, the first frame is stored in presentation cache unit 15.

If judged as not in step S95, control goes to step S97. In step S97, the first frame of presentation stream [p] is stored in a marked area of presentation cache unit 15 storing the oldest presentation stream, then control goes to step S92.

As will be understood from the above description, as many whole presentation streams as possible are stored in presentation cache unit 15 if presentation cache unit 15 has enough capacity; only the first frames of presentation streams are stored in presentation cache unit 15 if presentation cache unit 15 does not have enough space for storing a whole presentation stream.

Accordingly, high ranking presentation streams are stored in presentation cache unit 15 while presentation cache unit 15 has enough capacity. That means the whole video elements of the high ranking presentation streams are stored in presentation cache unit 15. In contrast, for low ranking presentation streams, only the first frames the video elements of the low ranking presentation streams are stored in presentation cache unit 15. This is because there is a low possibility for the low ranking presentation streams to be displayed.

In step S92, the index number is incremented by one. In step S90, it is judged whether a content is registered in the cache table at the position of the index number. If judged as yes, control goes to step S93 in which the cache end flag is set to "1," then control returns to step S54. If judged as yes in step S90, control goes to step S62 to enter the second cycle of the procedure.

In step S62 of the second cycle, content[q] in the cache table at the position of the index number is obtained. In the present case, the index number is currently "2" since the value has been incremented by one in step S92. Accordingly, the second content in the cache table, namely, content[3] is obtained here. Then, in step S63, variable q (currently, 3) is substituted for variable p. In step S64, NVT[3], video element[3], audio element

[3], and the PCR of content[3] are obtained.

Suppose in step S66, NVT[3] is stored in navigation cache unit 14 as the third NVT. Also suppose presentation stream[3] including video element[3] and audio element[3] is stored in presentation cache unit 15 as the third presentation stream. The index number is incremented by one again in step S92, then control goes to step S62 of the third cycle.

In step S62 of the third cycle, content[q] in the cache table at the position of the index number is obtained. Since the index number is currently "3," the third content in the cache table, namely, content[4] is obtained here. Then, in step S63, variable q (currently, 4) is substituted for variable p. Then, in step S64, NVT[4], video element [4], audio element[4], and the PCR of content[4] are obtained.

Suppose in step S66, NVT[4] is stored in navigation cache unit 14 as the fourth NVT. Also suppose presentation stream[4] including video element[4] and audio element[4] is stored in presentation cache unit 15 as the fourth presentation stream. The index number is incremented by one again in step S92, then control goes to step S62 of the fourth cycle.

In step S62 of the fourth cycle, content[q] in the cache table at the position of the index number is obtained. Since the index number is currently "4," the fourth content in the cache table, namely, content[5] is obtained here. Then, in step S63, variable q (currently, 5) is substituted for variable p. Then, in step S64, NVT [5], video element[5], audio element[5], and the PCR of content[5] are obtained.

Suppose in step S66, NVT[5] is stored in navigation cache unit 14 as the fifth NVT. Also suppose presentation stream[5] including video element[5] and audio element[5] is stored in presentation cache unit 15 as the fifth presentation stream. The index number is incremented by one again in step S92. This time, it is judged as no in step S90. As a result, control goes to step S93 in which the cache end flag is set to "1," and control returns to step S54 shown in FIG.14.

In step S54, it is judged whether an input of an operation instruction is waited for on the interactive screen.

If judged as yes in step S54, control goes to step S55. In step S55, content [i] corresponding to the current interactive screen is identified. The variable i indicates the index number of the content currently displayed in the interactive screen. Then, in step S56, the icon being in focus, namely, "NVT[i].NAVI[m]" is identified, where variable m indicates an index number of a piece of navigation information including a bit map of the icon being in focus in NVT[i]. Suppose the interactive screen shown in FIG.22A is currently displayed and the icon indicating "NEW MOVIE INFORMATION" is in focus. Under this condition, content[1] is identified in step S55, and "NVT [1].NAVI[1]" is identified in step S56.

In step S57, a link-target content[k] specified by the hyperlink information of navigation information "NVT[i].NAVI[m]" is obtained. Then, in step S59, variable k is

substituted for variable p. Control returns to step S53 so that "the contents one generation later than content[p]" are read.

In the present case, link-target content[2] specified by the hyperlink information of navigation information "NVT[1].NAVI[1]" is obtained. Then, in step S59, variable k (currently, 2) is substituted for variable p. Control returns to step S53 so that "the contents one generation later than content[2]" are read. In step S53, contents [11], [12], and [21] are read.

Now, the operation of the terminal apparatus is described with reference to the flowcharts shown in FIGs. 18-21 related to browser 25.

After the terminal apparatus is activated, browser 25 sets variable i to the root number in step S2 shown in FIG. 18. In step S3, NVT[i], video element[i], and audio element[i] are obtained. In step S4, the interactive screen generated from the obtained NVT[i], video element[i], and audio element[i] is displayed.

Step S4 is described in detail in the flowchart shown in FIG. 19.

In the flowchart shown in FIG. 19, browser 25 operates for switching the interactive screen at high speed.

In step S21, it is judged whether presentation stream[i] is stored in presentation cache unit 15. If judged as yes, control goes to step S22. In step S22, cache processing unit 21 is instructed to read presentation stream[i] from presentation cache unit 15. In step S23, input switching unit 22 is instructed so that streams are distributed to AV decoder 12 from presentation cache unit 15.

If judged as no in step S21, control goes to step S25. In step S25, it is judged whether the first frame of presentation stream[i] is stored in presentation cache unit 15. If judged as yes, control goes to step S26. In step S26, cache processing unit 21 is instructed to read the first frame of presentation stream[i] from presentation cache unit 15. In step S27, input switching unit 22 is instructed so that streams are distributed to AV decoder 12 from presentation cache unit 15. In step S28, AV decoder controlling unit 13 is instructed to issue the PIDs of video element[i] and audio element[i] to AV decoder 12, and the first frame of presentation stream[i] in presentation cache unit 15 is displayed.

If it is judged as no in step S25, control goes to step S29. In step S29, graphic displaying unit 24 outputs the character sequence indicating "WAIT FOR A MOMENT" stored in graphic storing unit 23 to AV decoder 12 so that the character sequence is displayed on the screen, the screen being displayed as a default screen.

In step S30, input switching unit 22 is instructed so that streams are distributed to AV decoder 12 from TS decoder 11.

In step S24, AV decoder controlling unit 13 is instructed so that the PIDs of video element[i] and audio element[i] are issued to AV decoder 12. With such an arrangement, AV decoder 12 decodes either of the presentation stream read from presentation cache unit 15

and the presentation stream received by TS decoder 11 using the PIDs sent from AV decoder controlling unit 13.

In step S31 shown in FIG. 20, it is judged whether NVT[i] is stored in navigation cache unit 14. If judged as yes, control goes to step S32. In step S32, NVT[i] is fetched from navigation cache unit 14.

If judged as not in step S31, control goes to step S42. In step S42, an icon display instruction is issued to graphic displaying unit 24. Graphic displaying unit 24, on receiving this instruction, displays the character sequence "WAIT FOR A MOMENT" stored in graphic storing unit 23, as the default screen.

In step S43, the table identifier of NVT[i] is output to the TS decoder. In step S44, the TS decoder is instructed to receive NVT[i]. In step S45, it is judged whether NVT[i] has been received. If judged as yes, control goes to step S46.

In step S46, all the bit maps included in "NVT[i].NAVI [start]"-"NVT[i].NAVI [end]" are transformed for display. In step S47, the transformed bit maps are output to the AV decoder. In step S48, the AV decoder combines the transformed bit maps with the image which is the decoded presentation stream[i]. In step S49 shown in FIG. 21, it is judged whether NVT[i] has been stored in navigation cache unit 14. If judged as yes, control goes to step S101. In step S101, the NVT[i] stored in navigation cache unit 14 is marked. If judged as no in step S49, control goes to step S100 in which NVT[i] is stored in navigation cache unit 14 with a mark.

In step S102, it is judged whether presentation stream[i] has been stored in presentation cache unit 15. If judged as yes, control goes to step S104. In step S104, the presentation stream[i] stored in presentation cache unit 15 is marked. If judged as no in step S102, control goes to step S103 in which presentation stream[i] is stored in presentation cache unit 15 with a mark.

In step S106, the cache end flag is set to 0. In step S107, variable m is set to 1. In step S108, the bit map of NVT[i].NAVI[m] is made to be in focus. Note that in the present embodiment, a bit map specified by the first piece of navigation information is made to be in focus. However, a bit map specified by any piece of navigation information may be made to be in focus. Control returns to step S5 shown in FIG. 18.

In step S5, it is judged whether an operation instruction has been input on the interactive screen. If judged as yes in step S5 by operation detecting unit 16, control goes to step S6. In step S6, it is judged whether the operation specified by the operation instruction is a determination operation. If judged as no, control goes to step S7. In step S7, it is judged whether the operation specified by the operation instruction is a cursor move operation.

If judged as yes, control goes to step S8. In step S8, the state of being in focus is cleared for the bit map of NVT[i].NAVI[m]. In step S9, variable m is updated to indicate a link-target index number. In step S10, the bit map of NVT[i].NAVI[m] is made to be in focus. Control

returns to step S5.

If it is judged that the input operation is the determination operation in step S6, control goes to step S11. In step S11, the bit map of NVT[i].NAVI[m] is made to be in the determination state. In step S12, a link-target content[k] specified by NVT[i].NAVI[m] in the hyperlink table is obtained. In step S13, NVT[k], video element[k], and audio element[k] are obtained. In step S14, the statistics value for NVT[k] in the statistics table is incremented by one. In step S15, "k" is substituted for "i." In step S16, the presentation streams and NVTs without marks are respectively deleted from presentation cache unit 15 and navigation cache unit 14. In step S18, it is judged whether the cache end flag is "1." Control stays at step S18 until the cache end flag is "1." This indicates that the next operation is not started until cache manager 17 completely stores the presentation streams and NVTs one generation later into presentation cache unit 15 and navigation cache unit 14 respectively. In case the reproduction of the presentation stream ends while the next operation is not started in the above process, browser 25 repeats reproduction of the presentation stream, keeps on displaying a still image of the last frame or the like. If it is judged as yes in step S18, control returns to S4.

Now, the operation on the contents shown in FIG. 7 is described, based on the above flowcharts.

FIG. 22A shows the interactive screen generated from NVT[1], video element[1], and audio element[1] in step S4 and is displayed on TV receiving unit 3. The interactive screen is composed of a shot image generated from presentation stream[1] and several icons superimposed on the shot image. The voice of an announcer is output. While the interactive screen is displayed, cache manager 17 obtains contents[2], [3], [4], and [5] specified in the handler definition table 302 and hyperlink table 304 of NVT[1]. Then, presentation streams [2], [3], [4], and [5] are stored in presentation cache unit 15 via demodulator 10 and TS decoder 11. Similarly, NVTs[2], [3], [4], and [5] are stored in navigation cache unit 14 via demodulator 10 and TS decoder 11.

Currently displayed presentation stream[1] and NVT[1] are marked respectively in presentation cache unit 15 and navigation cache unit 14, in steps 101 and 104. FIG. 10A and FIG. 11A respectively show the contents of navigation cache unit 14 and presentation cache unit 15 after the above operation.

When the operator determines an icon indicating "NEW MOVIE INFORMATION" on the current screen, the processing goes through steps S11 to S18 and returns to step S4 in which browser 25 displays the interactive screen generated from NVT[2], video element[2], and audio element[2]. FIG. 22B shows the interactive screen at this stage.

Currently displayed presentation stream[2] and NVT[2] are marked respectively in presentation cache unit 15 and navigation cache unit 14, in steps 101 and

104. FIG. 10B and FIG. 11B respectively show the contents of navigation cache unit 14 and presentation cache unit 15 after the above operation.

After presentation stream[2] and NVT[2] are displayed as described above, areas without marks are deleted from navigation cache unit 14 and presentation cache unit 15. FIGs. 10C and 11C respectively show the contents of navigation cache unit 14 and presentation cache unit 15 after the above operation.

While the interactive screen is displayed, cache manager 17 obtains contents[11], [12], and [21] specified in the hyperlink information of NVT[2]. Then, presentation streams[11], [12], and [21] are stored in presentation cache unit 15 via demodulator 10 and TS decoder 11. Similarly, NVTs[11], [12], and [21] are stored in navigation cache unit 14 via demodulator 10 and TS decoder 11. FIGs. 10D and 11D respectively show the contents of navigation cache unit 14 and presentation cache unit 15 after the above operation.

Suppose the operator determines an icon indicating "THE TERROR OF THE HUGE TORNADO (DISTRIBUTED BY AAA COMPANY)." Then, the processing goes through steps S11 to S18 and returns to step S4 in which browser 25 displays the interactive screen generated from NVT[12], video element[12], and audio element [12]. FIG. 22C shows the interactive screen displayed at this stage.

Currently displayed presentation stream[12] and NVT[12] are marked respectively in presentation cache unit 15 and navigation cache unit 14, in steps 101 and 104. FIG. 10E and FIG. 11E respectively show the contents of navigation cache unit 14 and presentation cache unit 15 after the above operation.

After presentation stream[12] and NVT[12] are displayed as described above, areas without marks are deleted from navigation cache unit 14 and presentation cache unit 15. FIGs. 10F and 11F respectively show the contents of navigation cache unit 14 and presentation cache unit 15 after the above operation.

While the interactive screen is displayed, cache manager 17 obtains contents[41]-[49] specified in the hyperlink information of NVT[12]. Then, presentation streams[41]-[49] and NVTs[41]-[49] are attempted to be stored respectively in presentation cache unit 15 and navigation cache unit 14. However, as shown in FIGs. 10F and 11F, there are only two free areas in each of the tables. As a result, presentation streams[41] and [42] and NVTs[41] and [42] are stored in two areas, replacing with two oldest presentation streams and NVTs respectively in presentation cache unit 15 and navigation cache unit 14. Presentation streams[43] and [44] and NVTs[43] and [44] are stored in two free areas of presentation cache unit 15 and navigation cache unit 14, respectively. FIGs. 10G and 11G respectively show the contents of navigation cache unit 14 and presentation cache unit 15 after the above operation.

Now, the operation corresponding to the determination of "RETURN" icon is described. Suppose the oper-

ator determines an icon indicating "RETURN" in the interactive screen as shown in FIG.22B. By referring NVT [2], it is determined that the icon is related to the index number 4, and that the link-destination is content[1].

FIG.10B and FIG.11B respectively show the contents of navigation cache unit 14 and presentation cache unit 15 at this stage. As will be understood from the tables shown in FIG.10B and FIG.11B, NVT[1] and presentation stream[1], namely, the above link targets, have already been stored. Accordingly, NVT[1] and presentation stream[1] can immediately be obtained from these tables and displayed as the interactive screen as shown in FIG.22A.

When the operator determines an icon indicating "NEW MOVIE INFORMATION" here, the interactive screen shown in FIG.22B is immediately displayed since presentation stream[2] and NVT[2] are stored in presentation cache unit 15 and navigation cache unit 14 with marks, respectively. As will be understood from the above description, the construction in which presentation streams and NVTs are stored in presentation cache unit 15 and navigation cache unit 14 with marks achieves the high-speed return to the previous screen responding to the determination of the "RETURN" icon.

As has been described above, the TV broadcasting system of the present embodiment enables an immediate display of an interactive screen since the link-target NVT and presentation stream can immediately be obtained from navigation cache unit 14 and presentation cache unit 15 and displayed, responding to the determination of one icon in the previous screen.

The TV broadcasting system of the present embodiment also enables storage of a plurality of presentation streams and NVTs which have possibility of being displayed next in presentation cache unit 15 and navigation cache unit 14 in advance while the current interactive screen is displayed.

The above operation also has an effect that the operator does not recognize the storing of presentation streams and NVTs since the storage is done while the TV broadcasting system waits for an input of an operation instruction on the currently displayed interactive screen. <Second Embodiment>

The present embodiment achieves a TV broadcasting system which uses video elements including still pictures, while the TV broadcasting system of the first embodiment uses video elements which include only motion pictures.

FIG.23 shows the contents of the transport streams broadcast in the present embodiment. Each of VE[0], VE[1], VE[2],... includes still pictures. While in the first embodiment, each video element has a different PID, in the second embodiment, each video element has a common PID which is "0x0084," as shown in FIG.23. This is because it is intended in the second embodiment that a large number of still pictures are broadcast and that the length of the PID is not enough for assigning a unique identifier to each video element. Though each

video element has a common PID, it has another identifier called "stream\_id." In FIG.23, for example, VE[0] has stream\_id "0xe0," and VE[1] has stream\_id "0xe1," as well as a common PID, "0x0084."

While in the first embodiment, the transport stream is composed of a sequence of video elements, in the second embodiment, the transport stream includes a private section called video element table (VET) between video elements. As shown in FIG.23, for example, VET[15] is inserted in immediately before VE[0], VET[16] in immediately before VE[1]. Similarly, the transport stream of the present embodiment includes a private section called audio element table (AET) between the audio elements.

FIG.24A shows the content of VET[15]. VET[15] includes an identifier called VE\_id\_extension whose value is "0x0001," which is unique to VET[15]. VET[15] also includes a PID, "0x0083." Though VET[15] is inserted in immediately before VE[0], it has the stream\_id "0xef" of VE[15] which is at a position about a dozen VEs away.

FIG.24B shows the content of VET[16]. VET[16] includes VE\_id\_extension whose value is "0x0000," which is unique to VET[16]. VET[16] also includes the same PID, "0x0083," as that of VET[15]. Though VET[16] is inserted in immediately before VE[1], it has the stream\_id "0xe0" of VE[16] which is at a position about a dozen VEs away. In this way, each VET has the stream\_id of a corresponding VE which is at a position a certain number of VEs away.

FIG.25 shows a content of a hyperlink table in an NVT of the second embodiment. The hyperlink table of the second embodiment differs from that of the first embodiment in that it includes "VE\_id\_extension" 2547 instead of "VE\_comp\_tag" and "AE\_id\_extension" instead of "AE\_comp\_tag." The "VE\_id\_extension" column and "AE\_id\_extension" column respectively show a VE\_id\_extension of a VET and an AE\_id\_extension of an AET. For example, "0x0000" and "0x0001" included in "VE\_id extension" 2547 shown in FIG.25 are VE\_id\_extensions of VET[16] and [15], respectively. This indicates that the hyperlink table defines link-target VETs.

From the above description, the following procedures are required in the second embodiment for changing still pictures.

A VE\_id\_extension written in hyperlink table → a VET with the VE\_id\_extension → a stream\_id included in the VET → a VE with the stream\_id

cache manager 17 operates as follows in the second embodiment.

When the operator determines an icon on an interactive screen, cache manager 17 detects an HD\_index number corresponding to the determined icon by referring to the object definition table, detects an HL\_index number corresponding to the HD\_index number by referring to the handler definition table, and detects a VE\_id\_extension corresponding to the HL\_index number by referring to the hyperlink table. Cache man-



ager 17 allows demodulator 10 and TS decoder 11 to receive a VET having the detected VE\_id extension among the plurality of VETs included in the transport stream. Cache manager 17 fetches a stream\_id and a component\_tag from the received VET. Cache manager 17 fetches a PID corresponding to the component\_tag from the PMT. Cache manager 17 waits for a VE with the stream\_id and the PID to be transmitted. If the VE is transmitted, cache manager 17 receives it.

After receiving a link-target VE in the above procedure, cache manager 17 also receives a link-target AE in a similar procedure. Cache manager 17 instructs input switching unit 22 to store the received VE and AE into presentation cache unit 15 as a presentation stream.

With the above construction, it is possible for the digital satellite broadcasting system, which broadcasts a large number of still pictures, to display interactive screens including a still picture specified as a link destination by a determination operation in another interactive screen. This is achieved by the reference of VETs included between VEs in the transport stream.

The two embodiments described above are examples of the present invention with which best effects are expected. It is also possible to change the embodiments as follows:

(a) In the present embodiments, the highest rank in the navigation information is indicated by integer "1." However, the highest rank may be integer "255" which is the highest value for 8-bit data in binary notation.

(B) In the present embodiments, mode managing unit 19 manages the cache mode in cache manager 17. However, the operator may input an instruction for changing a cache mode to another cache mode. Alternately, an NIT including the cache mode may be transmitted.

(C) In the present embodiments, cache processing unit 21 processes both navigation cache unit navigation cache unit 14 and presentation cache unit 15. However, navigation cache unit navigation cache unit 14 and presentation cache unit 15 may be processed by other two units, respectively.

(D) In the present embodiments, cache manager 17 suspends the reproduction until the cache end flag is set to "1." However, the reproduction may be continued without suspension.

(E) In the present embodiments, cache manager 17 stores each NVT and presentation stream separately in navigation cache unit 14 and presentation cache unit 15 respectively. However, demodulator 10 and TS decoder 11 may receive a plurality of NVTs and presentation streams in a transport stream at each reception so that they are stored in navigation cache unit 14 and presentation cache unit 15 with batch processing.

(F) In the present embodiments, cache processing

unit 21 deletes presentation streams or NVTs for effective use of the memory. However, the presentation streams or NVTs may not be deleted and be used again if the memory capacity allows it.

(G) In the present embodiments, presentation streams and NVTs one generation later than the content related to the determined icon are read in advance. However, a certain number of presentation streams and NVTs may be selected from those one generation later and two generations later than the current content and be read in advance.

(H) In the present embodiments, presentation streams or NVTs without marks are deleted. However, presentation streams or NVTs to be deleted may be determined based on the number of times they have been displayed in past, with a certain threshold value.

(I) Presentation cache unit 15 may be deleted from the construction. In such a case, the system operates as follows:

cache manager 17 obtains only NVTs having possibility of being displayed according to a current NVT in navigation cache unit 14 and stores them in navigation cache unit 14 while an input of an operation instruction is waited for on an interactive screen.

When the operator determines an icon on the interactive screen, the link-target content is determined referring to the current NVT.

If the link-target NVT has been stored in navigation cache unit 14, the link-target presentation stream is obtained according to the link-target NVT and is stored in navigation cache unit 14. The NVT and presentation stream are displayed. Such a construction takes more time in displaying the link-target NVT and presentation stream since they are obtained one by one. However, it has a merit of deleting presentation cache unit 15 from the construction. Further, in case the link-target interactive screen is composed of only the bit maps specified by an NVT, the presentation stream need not be obtained. This provides an effect of simplifying the construction and speeding up the display of the interactive screen.

(J) Navigation cache unit 14 may be deleted from the construction, and presentation cache unit 15 may store only presentation streams.

(K) In the second embodiment, VEs including still pictures are identified by using "stream\_id." However, different PIDs may be used instead of "stream\_id." On the other hand, though in the first embodiment, VEs including motion pictures are identified by using different PIDs, a common PID and "stream\_id" may be used instead.

(L) The procedure of the caching manager or the browser may be written in a machine-language program and be recorded in a record medium such as an IC card, optical disc, or floppy disk. The recorded

machine-language program is installed on a general-purpose hardware apparatus for use, where the general-purpose hardware apparatus indicates a personal computer which is connected to a parabolic antenna and includes built-in decoder, TS decoder, and AV decoder. Such a personal computer executes the installed machine-language program to achieve the features of the present apparatus described in the first and second embodiments.

(M) In the first embodiment, as many whole presentation streams as possible are stored in presentation cache unit 15. However, only the first frames or representative frames may be stored instead.

Although the present invention has been fully described by way of examples with reference to the accompanying drawings, it is to be noted that various changes and modifications will be apparent to those skilled in the art. Therefore, unless such changes and modifications depart from the scope of the present invention, they should be construed as being included therein.

#### Claims

1. A terminal apparatus for displaying an image by reproducing one out of  $m$  pieces of image information and for interactively changing the image using  $n$  pieces of navigation information, wherein the image is one of a moving picture, a still picture, and a mixture of a moving picture and a still picture, wherein the  $m$  pieces of image information and the  $n$  pieces of navigation information together are broadcast by a broadcasting station to the terminal apparatus, wherein each piece of navigation information is related to an origin piece of image information and indicates a plurality pieces of link-target image information, wherein  $m$  and  $n$  are each an integer either of being equal to and larger than "1," the terminal apparatus including:

cache means for storing a pair of one out of the  $m$  pieces of image information and one out of the  $n$  pieces of navigation information;

reproducing means for reproducing the one out of the  $m$  pieces of image information stored in the cache means;

monitoring means for monitoring whether an operator has performed a certain operation responding to the image displayed;

receiving means for, before the monitoring means determines that the operator has performed the certain operation, receiving  $s$  pieces of image information which have possibility of being displayed and  $t$  pieces of navigation information respectively related to the  $s$  pieces of image information based on the one out of the

$n$  pieces of navigation information stored in the cache means, and storing the  $s$  pieces of image information and the  $t$  pieces of navigation information in the cache means, wherein  $s$  is an integer satisfying  $1 \leq s < m$ , and  $t$  is an integer satisfying  $1 \leq t < n$ ;

specifying means for specifying one out of the plurality pieces of link-target image information based on the certain operation when the monitoring means monitors that the operator has performed the certain operation;

identifying means for identifying the one out of the plurality pieces of link-target image information specified by the specifying means as one out of the  $s$  pieces of image information stored in the cache means; and

first controlling means for reading the piece of link-target image information identified by the identifying means and instructing the reproducing means to reproduce the piece of link-target image information, and instructing the receiving means to receive other  $s$  pieces of image information and other  $t$  pieces of navigation information based on one out of the  $t$  pieces of navigation information in the cache means corresponding to the piece of link-target image information identified by the identifying means.

2. The terminal apparatus of Claim 1 further comprising:

superimposing means for superimposing, based on a piece of navigation information corresponding to the one out of the  $m$  pieces of image information stored in the cache means, a plurality of icons on the image which is displayed when the reproducing means reproduces the one out of the  $m$  pieces of image information, wherein

the monitoring means includes:

a determination operation detecting unit for detecting a determination operation performed on one out of the plurality of icons, wherein the identifying means identifies one out of the plurality pieces of link-target image information detected by the determination operation detecting unit.

3. The terminal apparatus of Claim 2 further comprising:

default image reproducing means for, when the identifying means fails to identify the one out of the plurality pieces of link-target image information specified by the specifying means, reproducing a default image; and

second controlling means for instructing the receiving means to receive the piece of link-target

image information specified by the specifying means when the piece of link-target image information is not identified by the identifying means, and to receive a piece of navigation information corresponding to the piece of link-target image information specified by the specifying means, and storing the received piece of link-target image information and the corresponding piece of navigation information in the cache means, wherein the superimposing means superimposes a plurality of icons on the image based on the piece of navigation information received by the receiving means.

4. The terminal apparatus of Claim 2, wherein

the reproducing means includes:  
focus setting means for making one out of the plurality of icons be in focus, wherein the monitoring means includes:  
a cursor move operation detecting unit for detecting a cursor move operation; and  
a focus changing unit for making another one out of the plurality of icons be in focus based on the cursor move operation detected by the cursor move operation detecting unit, wherein the determination operation detecting unit detects a determination operation performed on the other one out of the plurality of icons in focus.

5. The terminal apparatus of Claim 1 further comprising:

rank setting means for setting ranks of the m pieces of image information stored in the cache means based on possibility of being displayed; and  
cache table registering means for registering identifiers of high ranking s pieces of image information in a cache table, out of the m pieces of image information and registering identifiers of t pieces of navigation information corresponding to the high ranking s pieces of image information, wherein  
the receiving means receives the s pieces of image information whose identifiers are registered by the cache table registering means and receives t pieces of navigation information corresponding to the s pieces of image information.

6. The terminal apparatus of Claim 5 further comprising:

weighting means for weighting, with a highest value, the one out of the plurality of icons made

to be in focus by the focus setting means, and for weighting, with a second highest value, icons adjacent to the one in focus, wherein the rank setting means sets ranks of the m pieces of image information based on values weighted by the weighting means.

7. The terminal apparatus of Claim 6 further comprising:

deleting means for deleting, out of the identifiers of high ranking s pieces of image information and t pieces of navigation information in the cache table, identifiers of pieces of image information and pieces of navigation information which have been stored in the cache means.

8. The terminal apparatus of Claim 7, wherein

the receiving means includes:  
a receiving unit for receiving, out of the s pieces of image information and t pieces of navigation information with corresponding identifiers registered in the cache table, a piece of image information with a highest rank and a piece of navigation information corresponding to the piece of image information with the highest rank, wherein  
the terminal apparatus includes:  
data size judging means for judging whether capacity of a free area in the cache means exceeds a data size of the piece of image information with the highest rank and the piece of navigation information corresponding to the piece of image information with the highest rank; and  
writing means for writing the piece of image information with the highest rank and the corresponding piece of navigation information into the free area when the data size judging means judges that the capacity of the free area exceeds the data size of the piece of image information with the highest rank and the corresponding piece of navigation information, wherein  
the receiving unit receives a piece of image information with a second highest rank and a piece of navigation information corresponding to the piece of image information with the second highest rank after the writing means writes the piece of image information with the highest rank and the corresponding piece of navigation information into the free area.

9. The terminal apparatus of Claim 8, wherein

the data size judging means includes:  
a frame size judging unit for, when the data size judging means judges that the capacity of the

free area in the cache means does not exceed the data size of the piece of image information with the highest rank and the corresponding piece of navigation information, judging whether the capacity of the free area in the cache means exceeds the data size of a frame of the piece of image information with the highest rank and a piece of navigation information corresponding to the piece of image information with the highest rank, wherein the writing means includes:  
a frame writing unit for writing the frame of the piece of image information with the highest rank and the piece of navigation information corresponding to the piece of image information with the highest rank into the free area when the frame size judging unit judges that the capacity of the free area in the cache means exceeds the data size of the frame of the piece of image information with the highest rank and the piece of navigation information corresponding to the piece of image information with the highest rank.

10. The terminal apparatus of Claim 9, wherein

the data size judging means further includes:  
an oldest image information detecting unit for, out of the image information and the navigation information stored in the cache means, detecting a piece of oldest image information and a piece of oldest navigation information when the frame size judging unit judges that the capacity of the free area in the cache means does not exceed the data size of the frame of the piece of image information with the highest rank and the piece of navigation information corresponding to the piece of image information with the highest rank, wherein the frame writing unit overwrites the frame of the piece of image information with the highest rank and the corresponding piece of navigation information in an area in which the piece of oldest image information and the piece of oldest navigation information are stored.

11. The terminal apparatus of Claim 7 further comprising:

hit pair determining means for determining, as a hit pair, a pair of a piece of image information and a piece of navigation information which are specified by the operator by determining a corresponding icon out of the image information and the navigation information stored in the cache means;  
mark assigning means for assigning a mark indicating a hit to the pair of the piece of image

information and the piece of navigation information determined as the hit pair by the hit pair determining means; and  
area freeing means for freeing areas to which the mark is not assigned by the mark assigning means, out of the image information and the navigation information stored in the cache means.

12. The terminal apparatus of Claim 5 further comprising:

statistics value storing means for storing a statistics value for each piece of image information which indicates a number of times the piece of image information has been determined, wherein the rank setting means sets ranks of the m pieces of image information based on the statistics value for each piece of image information.

13. The terminal apparatus of Claim 12, wherein

the monitoring means includes:  
an incrementing unit for incrementing, by one, a statistics value for a piece of image information when the piece of image information is determined.

14. The terminal apparatus of Claim 13 further comprising:

deleting means for deleting, out of the identifiers of high ranking s pieces of image information and t pieces of navigation information in the cache table, identifiers of pieces of image information and pieces of navigation information which have been stored in the cache means.

15. The terminal apparatus of Claim 14, wherein

the receiving means includes:  
a receiving unit for receiving, out of the s pieces of image information and t pieces of navigation information with corresponding identifies registered in the cache table, a piece of image information with a highest rank and a piece of navigation information corresponding to the piece of image information with the highest rank, wherein the terminal apparatus includes:  
data size judging means for judging whether capacity of a free area in the cache means exceeds a data size of the piece of image information with the highest rank and the piece of navigation information corresponding to the piece of image information with the highest rank; and  
writing means for writing the piece of image in-

formation with the highest rank and the corresponding piece of navigation information into the free area when the data size judging means judges that the capacity of the free area exceeds the data size of the piece of image information with the highest rank and the corresponding piece of navigation information, wherein

the receiving unit receives a piece of image information with a second highest rank and a piece of navigation information corresponding to the piece of image information with the second highest rank after the writing means writes the piece of image information with the highest rank and the corresponding piece of navigation information into the free area.

**16. The terminal apparatus of Claim 15, wherein**

the data size judging means includes:

a frame size judging unit for, when the data size judging means judges that the capacity of the free area in the cache means does not exceed the data size of the piece of image information with the highest rank and the corresponding piece of navigation information, judging whether the capacity of the free area in the cache means exceeds the data size of a frame of the piece of image information with the highest rank and a piece of navigation information corresponding to the piece of image information with the highest rank, wherein

the writing means includes:

a frame writing unit for writing the frame of the piece of image information with the highest rank and the piece of navigation information corresponding to the piece of image information with the highest rank into the free area when the frame size judging unit judges that the capacity of the free area in the cache means exceeds the data size of the frame of the piece of image information with the highest rank and the piece of navigation information corresponding to the piece of image information with the highest rank.

**17. The terminal apparatus of Claim 16, wherein**

the data size judging means further includes:  
an oldest image information detecting unit for, out of the image information and the navigation information stored in the cache means, detecting a piece of oldest image information and a piece of oldest navigation information when the frame size judging unit judges that the capacity of the free area in the cache means does not exceed the data size of the frame of the piece of image information with the highest rank and

the piece of navigation information corresponding to the piece of image information with the highest rank, wherein

the frame writing unit overwrites the frame of the piece of image information with the highest rank and the corresponding piece of navigation information in an area in which the piece of oldest image information and the piece of oldest navigation information are stored.

**18. The terminal apparatus of Claim 14 further comprising:**

hit pair determining means for determining, as a hit pair, a pair of a piece of image information and a piece of navigation information which are specified by the operator by determining a corresponding icon out of the image information and the navigation information stored in the cache means;

mark assigning means for assigning a mark indicating a hit to the pair of the piece of image information and the piece of navigation information determined as the hit pair by the hit pair determining means; and

area freeing means for freeing areas to which the mark is not assigned by the mark assigning means, out of the image information and the navigation information stored in the cache means.

**19. The terminal apparatus of Claim 5 further comprising:**

rank information detecting means for detecting a piece of rank information from the piece of navigation information corresponding to the one out of the m pieces of image information reproduced by the reproducing means, wherein the piece of rank information includes ranks of the plurality pieces of link-target image information, wherein

the rank setting means sets ranks of the m pieces of image information based on the piece of rank information.

**20. The terminal apparatus of Claim 19 further comprising:**

deleting means for deleting, out of the identifiers of high ranking s pieces of image information and t pieces of navigation information in the cache table, identifiers of pieces of image information and pieces of navigation information which have been stored in the cache means.

**21. The terminal apparatus of Claim 20, wherein**

the receiving means includes:

a receiving unit for receiving, out of the s pieces of image information and t pieces of navigation information with corresponding identifies registered in the cache table, a piece of image information with a highest rank and a piece of navigation information corresponding to the piece of image information with the highest rank, wherein

the terminal apparatus includes:

data size judging means for judging whether capacity of a free area in the cache means exceeds a data size of the piece of image information with the highest rank and the piece of navigation information corresponding to the piece of image information with the highest rank; and

writing means for writing the piece of image information with the highest rank and the corresponding piece of navigation information into the free area when the data size judging means judges that the capacity of the free area exceeds the data size of the piece of image information with the highest rank and the corresponding piece of navigation information, wherein

the receiving unit receives a piece of image information with a second highest rank and a piece of navigation information corresponding to the piece of image information with the second highest rank after the writing means writes the piece of image information with the highest rank and the corresponding piece of navigation information into the free area.

**22. The terminal apparatus of Claim 21, wherein**

the data size judging means includes:

a frame size judging unit for, when the data size judging means judges that the capacity of the free area in the cache means does not exceed the data size of the piece of image information with the highest rank and the corresponding piece of navigation information, judging whether the capacity of the free area in the cache means exceeds the data size of a frame of the piece of image information with the highest rank and a piece of navigation information corresponding to the piece of image information with the highest rank, wherein

the writing means includes:

a frame writing unit for writing the frame of the piece of image information with the highest rank and the piece of navigation information corresponding to the piece of image information with the highest rank into the free area when the frame size judging unit judges that the capacity of the free area in the cache means exceeds the data size of the frame of the piece of image

information with the highest rank and the piece of navigation information corresponding to the piece of image information with the highest rank.

**23. The terminal apparatus of Claim 22, wherein**

the data size judging means further includes:

an oldest image information detecting unit for, out of the image information and the navigation information stored in the cache means, detecting a piece of oldest image information and a piece of oldest navigation information when the frame size judging unit judges that the capacity of the free area in the cache means does not exceed the data size of the frame of the piece of image information with the highest rank and the piece of navigation information corresponding to the piece of image information with the highest rank, wherein

the frame writing unit overwrites the frame of the piece of image information with the highest rank and the corresponding piece of navigation information in an area in which the piece of oldest image information and the piece of oldest navigation information are stored.

**24. The terminal apparatus of Claim 20 further comprising:**

rank information detecting means for detecting a piece of rank information from the piece of navigation information corresponding to the one out of the m pieces of image information reproduced by the reproducing means, wherein the piece of rank information includes ranks of the plurality pieces of link-target image information, wherein the rank setting means sets ranks of the m pieces of image information based on the piece of rank information.

**25. A terminal apparatus for displaying an image by reproducing one out of m pieces of image information and for interactively changing the image using n pieces of navigation information wherein the image is one of a moving picture, a still picture, and a mixture of a moving picture and a still picture, wherein the m pieces of image information and the n pieces of navigation information together are broadcast by a broadcasting station to the terminal apparatus, wherein each piece of navigation information is related to an origin piece of image information and indicates a plurality pieces of link-target image information, wherein m and n are each an integer either of being equal to and larger than "1," the terminal apparatus comprising:**

reproducing means for reproducing the one out of the m pieces of image information;  
cache means for storing one out of the n pieces of navigation information which corresponds to the one out of the m pieces of image information;

monitoring means for monitoring whether an operator has performed a certain operation responding to the image displayed;

first receiving means for, before the monitoring means determines that the operator has performed the certain operation, receiving, based on the piece of navigation information stored in the cache means, t pieces of navigation information which are respectively related to s pieces of image information having possibility of being displayed, and storing the t pieces of navigation information in the cache means, wherein s is an integer satisfying  $1 \leq s < m$ , and t is an integer satisfying  $1 \leq t < n$ ;

specifying means for specifying one out of the plurality pieces of link-target image information based on the certain operation when the monitoring means monitors that the operator has performed the certain operation;

identifying means for identifying a piece of navigation information corresponding to the one out of the plurality pieces of link-target image information specified by the specifying means as one out of the t pieces of navigation information stored in the cache means; and

second receiving means for receiving the piece of link-target image information based on the piece of navigation information in the cache means corresponding to the piece of link-target image information specified by the specifying means, and storing the piece of link-target image information in the cache means, wherein the reproducing means reproduces the piece of link-target image information received by the second receiving means.

26. The terminal apparatus of Claim 25 further comprising:

superimposing means for superimposing, based on a piece of navigation information corresponding to the one out of the m pieces of image information stored in the cache means, a plurality of icons on the image which is displayed when the reproducing means reproduces the one out of the m pieces of image information, wherein

the monitoring means includes:

a determination operation detecting unit for detecting a determination operation performed on one out of the plurality of icons, wherein the identifying means identifies one out of the

plurality pieces of link-target image information detected by the determination operation detecting unit.

27. The terminal apparatus of Claim 26 further comprising:

default image reproducing means for, when the identifying means fails to identify the piece of navigation information in the cache means, reproducing a default image; and  
controlling means for instructing the first receiving means to receive the piece of navigation information when the piece of navigation information is not identified by the identifying means.

28. The terminal apparatus of Claim 27, wherein

the reproducing means includes:

focus setting means for making one out of the plurality of icons be in focus, wherein the monitoring means includes:

a cursor move operation detecting unit for detecting a cursor move operation; and

a focus changing unit for making another one out of the plurality of icons be in focus based on the cursor move operation detected by the cursor move operation detecting unit, wherein the determination operation detecting unit detects a determination operation performed on the other one out of the plurality of icons in focus.

29. The terminal apparatus of Claim 26 further comprising:

rank setting means for setting ranks of the n pieces of navigation information based on possibility of being displayed; and

cache table registering means for registering identifiers of high ranking t pieces of navigation information in a cache table, out of the n pieces of navigation information, wherein

the receiving means receives the t pieces of navigation information specified by the identifiers registered in the cache table.

30. The terminal apparatus of Claim 25 further comprising:

weighting means for weighting, with a highest value, the one out of the plurality of icons made to be in focus by the focus setting means, and for weighting, with a second highest value, icons adjacent to the one in focus, wherein the rank setting means sets ranks of the n pieces of navigation information based on values weighted by the weighting means.

31. The terminal apparatus of Claim 30 further comprising:

deleting means for deleting, out of the identifiers of high ranking  $t$  pieces of navigation information in the cache table, identifiers of pieces of navigation information which have been stored in the cache means.

32. The terminal apparatus of Claim 31, wherein

the first receiving means includes:

a receiving unit for receiving, out of the  $t$  pieces of navigation information with corresponding identifiers registered in the cache table, a piece of navigation information with a highest rank, wherein

the terminal apparatus includes:

data size judging means for judging whether capacity of a free area in the cache means exceeds a data size of the piece of navigation information with the highest rank; and

writing means for writing the piece of navigation information with the highest rank into the free area when the data size judging means judges that the capacity of the free area exceeds the data size of the piece of navigation information with the highest rank, wherein

the receiving unit receives a piece of navigation information with a second highest rank after the writing means writes the piece of navigation information with the highest rank into the free area.

33. A terminal apparatus for displaying an image by reproducing one out of  $m$  pieces of image information and for interactively changing the image using  $n$  pieces of navigation information wherein the image is one of a moving picture, a still picture, and a mixture of a moving picture and a still picture, wherein the  $m$  pieces of image information and the  $n$  pieces of navigation information together are broadcast by a broadcasting station to the terminal apparatus, wherein each piece of navigation information is related to an origin piece of image information and indicates a plurality pieces of link-target image information, wherein  $m$  and  $n$  are each an integer either of being equal to and larger than "1," the terminal apparatus comprising:

cache means for storing one out of the  $m$  pieces of image information;

reproducing means for reproducing the one out of the  $m$  pieces of image information stored in the cache means;

monitoring means for monitoring whether an operator has performed a certain operation responding to the image displayed;

first receiving means for, before the monitoring

means determines that the operator has performed the certain operation, receiving, based on a piece of navigation information corresponding to the one out of the  $m$  pieces of image information,  $s$  pieces of image information which have possibility of being displayed, and storing the  $s$  pieces of image information in the cache means, wherein  $s$  is an integer satisfying  $1 \leq s < m$ ;

specifying means for specifying one out of the plurality pieces of link-target image information based on the certain operation when the monitoring means monitors that the operator has performed the certain operation;

identifying means for identifying the one out of the plurality pieces of link-target image information specified by the specifying means as one out of the  $s$  pieces of image information stored in the cache means; and

second receiving means for receiving the one out of the  $s$  pieces of image information from the cache means, wherein

the reproducing means reproduces the one out of the  $s$  pieces of image information received by the second receiving means.

34. The terminal apparatus of Claim 33 further comprising:

superimposing means for superimposing, based on a piece of navigation information corresponding to the one out of the  $m$  pieces of image information stored in the cache means, a plurality of icons on the image which is displayed when the reproducing means reproduces the one out of the  $m$  pieces of image information, wherein

the monitoring means includes:

a determination operation detecting unit for detecting a determination operation performed on one out of the plurality of icons, wherein

the identifying means identifies one out of the plurality pieces of link-target image information detected by the determination operation detecting unit.

35. The terminal apparatus of Claim 34 further comprising:

default image reproducing means for, when the identifying means fails to identify the piece of image information in the cache means, reproducing a default image; and

controlling means for instructing the first receiving means to receive the piece of image information when the piece of image information is not identified by the identifying means.



36. The terminal apparatus of Claim 35, wherein

the reproducing means includes:  
 focus setting means for making one out of the plurality of icons be in focus, wherein  
 the monitoring means includes:  
 a cursor move operation detecting unit for detecting a cursor move operation; and  
 a focus changing unit for making another one out of the plurality of icons be in focus based on the cursor move operation detected by the cursor move operation detecting unit, wherein  
 the determination operation detecting unit detects a determination operation performed on the other one out of the plurality of icons in focus.

37. The terminal apparatus of Claim 34 further comprising:

rank setting means for setting ranks of the m pieces of image information based on possibility of being displayed; and  
 cache table registering means for registering identifiers of high ranking s pieces of image information in a cache table, out of the m pieces of image information, wherein  
 the receiving means receives the s pieces of image information specified by the identifiers registered in the cache table.

38. The terminal apparatus of Claim 33 further comprising:

weighting means for weighting, with a highest value, the one out of the plurality of icons made to be in focus by the focus setting means, and for weighting, with a second highest value, icons adjacent to the one in focus, wherein  
 the rank setting means sets ranks of the m pieces of image information based on values weighted by the weighting means.

39. The terminal apparatus of Claim 38 further comprising:

deleting means for deleting, out of the identifiers of high ranking s pieces of image information in the cache table, identifiers of pieces of image information which have been stored in the cache means.

40. The terminal apparatus of Claim 39, wherein

the first receiving means includes:  
 a receiving unit for receiving, out of the s pieces of image information with corresponding identifiers registered in the cache table, a piece of image information with a highest rank, wherein

the terminal apparatus includes:

data size judging means for judging whether capacity of a free area in the cache means exceeds a data size of the piece of image information with the highest rank; and  
 writing means for writing the piece of image information with the highest rank into the free area when the data size judging means judges that the capacity of the free area exceeds the data size of the piece of image information with the highest rank, wherein  
 the receiving unit receives a piece of image information with a second highest rank after the writing means writes the piece of image information with the highest rank into the free area.

41. A terminal apparatus for displaying an image by reproducing one out of m pieces of image information and for interactively changing the image using n pieces of navigation information, wherein the image is one of a moving picture, a still picture, and a mixture of a moving picture and a still picture, wherein the m pieces of image information and the n pieces of navigation information together are broadcast by a broadcasting station to the terminal apparatus, wherein each piece of navigation information is related to an origin piece of image information and indicates a plurality pieces of link-target image information, wherein m and n are each an integer either of being equal to and larger than "1," the terminal apparatus including:

cache means for storing a pair of one out of the m pieces of image information and one out of the n pieces of navigation information;  
 reproducing means for reproducing the one out of the m pieces of image information stored in the cache means;  
 monitoring means for monitoring whether an operator has performed a certain operation responding to the image displayed;  
 receiving means for, before the monitoring means determines that the operator has performed the certain operation, receiving s pieces of image information which have possibility of being displayed and t pieces of navigation information respectively related to the s pieces of image information based on the one out of the n pieces of navigation information stored in the cache means, and storing the s pieces of image information and the t pieces of navigation information in the cache means, wherein s is an integer satisfying  $1 \leq s < m$ , and t is an integer satisfying  $1 \leq t < n$ ;  
 specifying means for specifying one out of the plurality pieces of link-target image information based on the certain operation when the monitoring means monitors that the operator has

performed the certain operation;  
 identifying means for identifying the one out of  
 the plurality pieces of link-target image informa-  
 tion specified by the specifying means as one  
 out the s pieces of image information stored in  
 the cache means;

first controlling means for reading the piece of  
 link-target image information identified by the  
 identifying means and instructing the reproduc-  
 ing means to reproduce the piece of link-target  
 image information, and instructing the receiving  
 means to receive other s pieces of image informa-  
 tion and other t pieces of navigation informa-  
 tion based on one out of the t pieces of nav-  
 igation information in the cache means corre-  
 sponding to the piece of link-target image infor-  
 mation identified by the identifying means;  
 rank setting means for setting ranks of the m  
 pieces of image information stored in the cache  
 means based on possibility of being displayed;

and  
 cache table registering means for registering  
 identifiers of high ranking s pieces of image in-  
 formation in a cache table, out of the m pieces  
 of image information and registering identifiers  
 of t pieces of navigation information corre-  
 sponding to the high ranking s pieces of image  
 information, wherein

the receiving means receives the s pieces of  
 image information whose identifiers are regis-  
 tered by the cache table registering means and  
 receives t pieces of navigation information cor-  
 responding to the s pieces of image informa-  
 tion.

42. A terminal apparatus for displaying an image by re-  
 producing one out of m pieces of image information  
 and for interactively changing the image using n  
 pieces of navigation information, wherein the image  
 is one of a moving picture, a still picture, and a mix-  
 ture of a moving picture and a still picture, wherein  
 the m pieces of image information and the n pieces  
 of navigation information together are broadcast by  
 a broadcasting station to the terminal apparatus,  
 wherein each piece of navigation information is re-  
 lated to an origin piece of image information and in-  
 dicates a plurality pieces of link-target image infor-  
 mation, wherein m and n are each an integer either  
 of being equal to and larger than "1," the terminal  
 apparatus including:

cache means for storing a pair of one out of the  
 m pieces of image information and one out of  
 the n pieces of navigation information;

reproducing means for reproducing the one out  
 of the m pieces of image information stored in  
 the cache means;

monitoring means for monitoring whether an

operator has performed a certain operation re-  
 sponding to the image displayed;

receiving means for, before the monitoring  
 means determines that the operator has per-  
 formed the certain operation, receiving s pieces  
 of image information which have possibility of  
 being displayed and t pieces of navigation in-  
 formation respectively related to the s pieces of  
 image information based on the one out of the  
 n pieces of navigation information stored in the  
 cache means, and storing the s pieces of image  
 information and the t pieces of navigation infor-  
 mation in the cache means, wherein s is an in-  
 teger satisfying  $1 \leq s < m$ , and t is an integer sat-  
 isfying  $1 \leq t < n$ ;

specifying means for specifying one out of the  
 plurality pieces of link-target image informa-  
 tion based on the certain operation when the mon-  
 itoring means monitors that the operator has  
 performed the certain operation;

identifying means for identifying the one out of  
 the plurality pieces of link-target image informa-  
 tion specified by the specifying means as one  
 out the s pieces of image information stored in  
 the cache means;

first controlling means for reading the piece of  
 link-target image information identified by the  
 identifying means and instructing the reproduc-  
 ing means to reproduce the piece of link-target  
 image information, and instructing the receiving  
 means to receive other s pieces of image infor-  
 mation and other t pieces of navigation infor-  
 mation based on one out of the t pieces of nav-  
 igation information in the cache means corre-  
 sponding to the piece of link-target image infor-  
 mation identified by the identifying means;

superimposing means for superimposing,  
 based on a piece of navigation information cor-  
 responding to the one out of the m pieces of  
 image information stored in the cache means,  
 a plurality of icons on the image which is dis-  
 played when the reproducing means reproduc-  
 es the one out of the m pieces of image infor-  
 mation;

rank setting means for setting ranks of the m  
 pieces of image information stored in the cache  
 means based on possibility of being displayed;

cache table registering means for registering  
 identifiers of high ranking s pieces of image in-  
 formation in a cache table, out of the m pieces  
 of image information and registering identifiers  
 of t pieces of navigation information corre-  
 sponding to the high ranking s pieces of image  
 information; and

weighting means for weighting, with a highest  
 value, the one out of the plurality of icons made  
 to be in focus by the focus setting means, and  
 for weighting, with a second highest value,

icons adjacent to the one in focus, wherein the reproducing means includes:

focus setting means for making one out of the plurality of icons be in focus, wherein the monitoring means includes:

a determination operation detecting unit for detecting a determination operation performed on one out of the plurality of icons; a cursor move operation detecting unit for detecting a cursor move operation; and a focus changing unit for making another one out of the plurality of icons be in focus based on the cursor move operation detected by the cursor move operation detecting unit, wherein

the identifying means identifies one out of the plurality pieces of link-target image information detected by the determination operation detecting unit, wherein

the determination operation detecting unit detects a determination operation performed on the other one out of the plurality of icons in focus, wherein

the receiving means receives the s pieces of image information whose identifiers are registered by the cache table registering means and receives t pieces of navigation information corresponding to the s pieces of image information, and wherein

the rank setting means sets ranks of the m pieces of image information based on values weighted by the weighting means.

43. A terminal apparatus for displaying an image by reproducing one out of m pieces of image information and for interactively changing the image using n pieces of navigation information, wherein the image is one of a moving picture, a still picture, and a mixture of a moving picture and a still picture, wherein the m pieces of image information and the n pieces of navigation information together are broadcast by a broadcasting station to the terminal apparatus, wherein each piece of navigation information is related to an origin piece of image information and indicates a plurality pieces of link-target image information, wherein m and n are each an integer either of being equal to and larger than "1," the terminal apparatus including:

cache means for storing a pair of one out of the m pieces of image information and one out of the n pieces of navigation information;

reproducing means for reproducing the one out of the m pieces of image information stored in the cache means;

monitoring means for monitoring whether an

operator has performed a certain operation responding to the image displayed;

receiving means for, before the monitoring means determines that the operator has performed the certain operation, receiving s pieces of image information which have possibility of being displayed and t pieces of navigation information respectively related to the s pieces of image information based on the one out of the n pieces of navigation information stored in the cache means, and storing the s pieces of image information and the t pieces of navigation information in the cache means, wherein s is an integer satisfying  $1 \leq s < m$ , and t is an integer satisfying  $1 \leq t < n$ ;

specifying means for specifying one out of the plurality pieces of link-target image information based on the certain operation when the monitoring means monitors that the operator has performed the certain operation;

identifying means for identifying the one out of the plurality pieces of link-target image information specified by the specifying means as one out of the s pieces of image information stored in the cache means;

first controlling means for reading the piece of link-target image information identified by the identifying means and instructing the reproducing means to reproduce the piece of link-target image information, and instructing the receiving means to receive other s pieces of image information and other t pieces of navigation information based on one out of the t pieces of navigation information in the cache means corresponding to the piece of link-target image information identified by the identifying means;

superimposing means for superimposing, based on a piece of navigation information corresponding to the one out of the m pieces of image information stored in the cache means, a plurality of icons on the image which is displayed when the reproducing means reproduces the one out of the m pieces of image information;

rank setting means for setting ranks of the m pieces of image information stored in the cache means based on possibility of being displayed; cache table registering means for registering identifiers of high ranking s pieces of image information in a cache table, out of the m pieces of image information and registering identifiers of t pieces of navigation information corresponding to the high ranking s pieces of image information; and

deleting means for deleting, out of the identifiers of high ranking s pieces of image information and t pieces of navigation information in the cache table, identifiers of pieces of image infor-

mation and pieces of navigation information which have been stored in the cache means, wherein

the monitoring means includes:

a determination operation detecting unit 5  
for detecting a determination operation performed on one out of the plurality of icons, wherein

the identifying means identifies one out of the plurality pieces of link-target image information 10  
detected by the determination operation detecting unit, wherein

the receiving means receives the s pieces of image information whose identifiers are registered by the cache table registering means and 15  
receives t pieces of navigation information corresponding to the s pieces of image information.

44. A terminal apparatus for displaying an image by re- 20  
producing one out of m pieces of image information and for interactively changing the image using n pieces of navigation information, wherein the image is one of a moving picture, a still picture, and a mixture of a moving picture and a still picture, wherein 25  
the m pieces of image information and the n pieces of navigation information together are broadcast by a broadcasting station to the terminal apparatus, wherein each piece of navigation information is related to an origin piece of image information and indicates a plurality pieces of link-target image information, wherein m and n are each an integer either 30  
of being equal to and larger than "1," the terminal apparatus including:

cache means for storing a pair of one out of the m pieces of image information and one out of the n pieces of navigation information; 35

reproducing means for reproducing the one out of the m pieces of image information stored in the cache means; 40

monitoring means for monitoring whether an operator has performed a certain operation responding to the image displayed;

receiving means for, before the monitoring means determines that the operator has performed the certain operation, receiving s pieces 45  
of image information which have possibility of being displayed and t pieces of navigation information respectively related to the s pieces of

image information based on the one out of the n pieces of navigation information stored in the cache means, and storing the s pieces of image information and the t pieces of navigation information in the cache means, wherein s is an integer satisfying  $1 \leq s < m$ , and t is an integer satisfying  $1 \leq t < n$ ; 50  
specifying means for specifying one out of the

plurality pieces of link-target image information based on the certain operation when the monitoring means monitors that the operator has performed the certain operation;

identifying means for identifying the one out of the plurality pieces of link-target image information specified by the specifying means as one out the s pieces of image information stored in the cache means;

first controlling means for reading the piece of link-target image information identified by the identifying means and instructing the reproducing means to reproduce the piece of link-target image information, and instructing the receiving means to receive other s pieces of image information and other t pieces of navigation information based on one out of the t pieces of navigation information in the cache means corresponding to the piece of link-target image information identified by the identifying means;

superimposing means for superimposing, based on a piece of navigation information corresponding to the one out of the m pieces of image information stored in the cache means, a plurality of icons on the image which is displayed when the reproducing means reproduces the one out of the m pieces of image information;

rank setting means for setting ranks of the m pieces of image information stored in the cache means based on possibility of being displayed; cache table registering means for registering identifiers of high ranking s pieces of image information in a cache table, out of the m pieces of image information and registering identifiers of t pieces of navigation information corresponding to the high ranking s pieces of image information; and

rank information detecting means for detecting a piece of rank information from the piece of navigation information corresponding to the one out of the m pieces of image information reproduced by the reproducing means, wherein the piece of rank information includes ranks of the plurality pieces of link-target image information, wherein

the monitoring means includes:

a determination operation detecting unit for detecting a determination operation performed on one out of the plurality of icons, wherein

the identifying means identifies one out of the plurality pieces of link-target image information detected by the determination operation detecting unit, wherein

the receiving means receives the s pieces of image information whose identifiers are registered by the cache table registering means and

receives  $t$  pieces of navigation information corresponding to the  $s$  pieces of image information, and wherein

the rank setting means sets ranks of the  $m$  pieces of image information based on the piece of rank information.

45. A reproduction method used in a terminal apparatus for displaying an image by reproducing one out of  $m$  pieces of image information and for interactively changing the image using  $n$  pieces of navigation information wherein the image is one of a moving picture, a still picture, and a mixture of a moving picture and a still picture, wherein the  $m$  pieces of image information and the  $n$  pieces of navigation information together are broadcast by a broadcasting station to the terminal apparatus, wherein each piece of navigation information is related to an origin piece of image information and indicates a plurality pieces of link-target image information, wherein  $m$  and  $n$  are each an integer either of being equal to and larger than "1," the terminal apparatus comprising:

cache means for storing a pair of one out of the  $m$  pieces of image information and one out of the  $n$  pieces of navigation information, wherein the reproduction method comprising:

a reproducing step of reproducing the one out of the  $m$  pieces of image information stored in the cache means;

a monitoring step of monitoring whether an operator has performed a certain operation responding to the image displayed;

a receiving step of, before it is determined in the monitoring step that the operator has performed the certain operation, receiving  $s$  pieces of image information which have possibility of being displayed and  $t$  pieces of navigation information respectively related to the  $s$  pieces of image information based on the one out of the  $n$  pieces of navigation information stored in the cache means, and storing the  $s$  pieces of image information and the  $t$  pieces of navigation information in the cache means, wherein  $s$  is an integer satisfying  $1 \leq s < m$ , and  $t$  is an integer satisfying  $1 \leq t < n$ ;

a specifying step of specifying one out of the plurality pieces of link-target image information based on the certain operation when the monitoring step monitors that the operator has performed the certain operation;

an identifying step of identifying the one out of the plurality pieces of link-target image information specified in the specifying step as one out of the  $s$  pieces of image information stored in the cache means; and

a first controlling step of reading the piece of link-target image information identified in the

identifying step and instructing the reproducing step to reproduce the piece of link-target image information, and instructing the receiving step to receive other  $s$  pieces of image information and other  $t$  pieces of navigation information based on one out of the  $t$  pieces of navigation information in the cache means corresponding to the piece of link-target image information identified in the identifying step.

46. The reproduction method of Claim 45 further comprising:

a superimposing step of superimposing, based on a piece of navigation information corresponding to the one out of the  $m$  pieces of image information stored in the cache means, a plurality of icons on the image which is displayed when the one out of the  $m$  pieces of image information is reproduced in the reproducing step, wherein

the monitoring step includes:

a determination operation detecting sub-step of detecting a determination operation performed on one out of the plurality of icons, wherein in the identifying step, one out of the plurality pieces of link-target image information detected by the determination operation detecting unit is identified.

47. The reproduction method of Claim 46 further comprising:

a default image reproducing step of, when the identifying step fails to identify the one out of the plurality pieces of link-target image information specified in the specifying step, reproducing a default image; and

a second controlling step of instructing the receiving step to receive the piece of link-target image information specified in the specifying step when the piece of link-target image information is not identified in the identifying step, and to receive a piece of navigation information corresponding to the piece of link-target image information specified in the specifying step, and storing the received piece of link-target image information and the corresponding piece of navigation information in the cache means, wherein

in the superimposing step, a plurality of icons are superimposed on the image based on the piece of navigation information received in the receiving step.

48. The reproduction method of Claim 46, wherein

the reproducing step includes:

a focus setting step of making one out of the plurality of icons be in focus, wherein the monitoring step includes:

a cursor move operation detecting sub-step of detecting a cursor move operation; and  
a focus changing sub-step of making another one out of the plurality of icons be in focus based on the cursor move operation detected in the cursor move operation detecting sub-step, wherein  
in the determination operation detecting sub-step, a determination operation performed on the other one out of the plurality of icons in focus is detected.

49. The reproduction method of Claim 45 further comprising:

a rank setting step of setting ranks of the m pieces of image information stored in the cache means based on possibility of being displayed; and

a cache table registering step of registering identifiers of high ranking s pieces of image information in a cache table, out of the m pieces of image information and registering identifiers of t pieces of navigation information corresponding to the high ranking s pieces of image information, wherein

in the receiving step, the s pieces of image information whose identifiers are registered in the cache table registering step are received and t pieces of navigation information corresponding to the s pieces of image information are received.

50. The reproduction method of Claim 49 further comprising:

a weighting step of weighting, with a highest value, the one out of the plurality of icons made to be in focus in the focus setting step, and for weighting, with a second highest value, icons adjacent to the one in focus, wherein  
in the rank setting step, ranks of the m pieces of image information are set based on values weighted in the weighting step.

51. The reproduction method of Claim 50 further comprising:

a deleting step of deleting, out of the identifiers of high ranking s pieces of image information and t pieces of navigation information in the cache table, identifiers of pieces of image information and pieces of navigation information which have been stored in the cache means.

52. A record medium in which a reproduction program

is recorded, the reproduction program being used in a terminal apparatus for displaying an image by reproducing one out of m pieces of image information and for interactively changing the image using n pieces of navigation information wherein the image is one of a moving picture, a still picture, and a mixture of a moving picture and a still picture, wherein the m pieces of image information and the n pieces of navigation information together are broadcast by a broadcasting station to the terminal apparatus, wherein each piece of navigation information is related to an origin piece of image information and indicates a plurality pieces of link-target image information, wherein m and n are each an integer either of being equal to and larger than "1," the terminal apparatus comprising:

cache means for storing a pair of one out of the m pieces of image information and one out of the n pieces of navigation information, wherein the reproduction program comprising:

a reproducing step of reproducing the one out of the m pieces of image information stored in the cache means;

a monitoring step of monitoring whether an operator has performed a certain operation responding to the image displayed;

a receiving step of, before it is determined in the monitoring step that the operator has performed the certain operation, receiving s pieces of image information which have possibility of being displayed and t pieces of navigation information respectively related to the s pieces of image information based on the one out of the n pieces of navigation information stored in the cache means, and storing the s pieces of image information and the t pieces of navigation information in the cache means, wherein s is an integer satisfying  $1 \leq s < m$ , and t is an integer satisfying  $1 \leq t < n$ ;

a specifying step of specifying one out of the plurality pieces of link-target image information based on the certain operation when the monitoring step monitors that the operator has performed the certain operation;

an identifying step of identifying the one out of the plurality pieces of link-target image information specified in the specifying step as one out of the s pieces of image information stored in the cache means; and

a first controlling step of reading the piece of link-target image information identified in the identifying step and instructing the reproducing step to reproduce the piece of link-target image information, and instructing the receiving step to receive other s pieces of image information and other t pieces of navigation information based on one out of the t pieces of navigation

information in the cache means corresponding to the piece of link-target image information identified in the identifying step.

**53.** The record medium of Claim 52, wherein

5

the reproduction program further comprises:  
a superimposing step of superimposing, based on a piece of navigation information corresponding to the one out of the m pieces of image information stored in the cache means, a plurality of icons on the image which is displayed when the one out of the m pieces of image information is reproduced in the reproducing step, wherein

10

the monitoring step includes:

15

a determination operation detecting sub-step of detecting a determination operation performed on one out of the plurality of icons, wherein in the identifying step, one out of the plurality pieces of link-target image information detected by the determination operation detecting unit is identified.

20

**54.** The record medium of Claim 53, wherein

25

the reproduction program further comprises:  
a default image reproducing step of, when the identifying step fails to identify the one out of the plurality pieces of link-target image information specified in the specifying step, reproducing a default image; and

30

a second controlling step of instructing the receiving step to receive the piece of link-target image information specified in the specifying step when the piece of link-target image information is not identified in the identifying step, and to receive a piece of navigation information corresponding to the piece of link-target image information specified in the specifying step, and storing the received piece of link-target image information and the corresponding piece of navigation information in the cache means, wherein

35

in the superimposing step, a plurality of icons are superimposed on the image based on the piece of navigation information received in the receiving step.

40

**55.** The record medium of Claim 53, wherein

50

the reproducing step includes:

a focus setting step of making one out of the plurality of icons be in focus, wherein

the monitoring step includes:

55

a cursor move operation detecting sub-step of detecting a cursor move operation; and  
a focus changing sub-step of making another

one out of the plurality of icons be in focus based on the cursor move operation detected in the cursor move operation detecting sub-step, wherein

in the determination operation detecting sub-step, a determination operation performed on the other one out of the plurality of icons in focus is detected.

**56.** The record medium of Claim 52, wherein

the reproduction program further comprises:

a rank setting step of setting ranks of the m pieces of image information stored in the cache means based on possibility of being displayed; and

a cache table registering step of registering identifiers of high ranking s pieces of image information in a cache table, out of the m pieces of image information and registering identifiers of t pieces of navigation information corresponding to the high ranking s pieces of image information, wherein

in the receiving step, the s pieces of image information whose identifiers are registered in the cache table registering step are received and t pieces of navigation information corresponding to the s pieces of image information are received.

**57.** The record medium of Claim 56, wherein

the reproduction program further comprises:

a weighting step of weighting, with a highest value, the one out of the plurality of icons made to be in focus in the focus setting step, and for weighting, with a second highest value, icons adjacent to the one in focus, wherein in the rank setting step, ranks of the m pieces of image information are set based on values weighted in the weighting step.

**58.** The record medium of Claim 57, wherein

the reproduction program further comprises:

a deleting step of deleting, out of the identifiers of high ranking s pieces of image information and t pieces of navigation information in the cache table, identifiers of pieces of image information and pieces of navigation information which have been stored in the cache means.



FIG. 1A



FIG. 1B

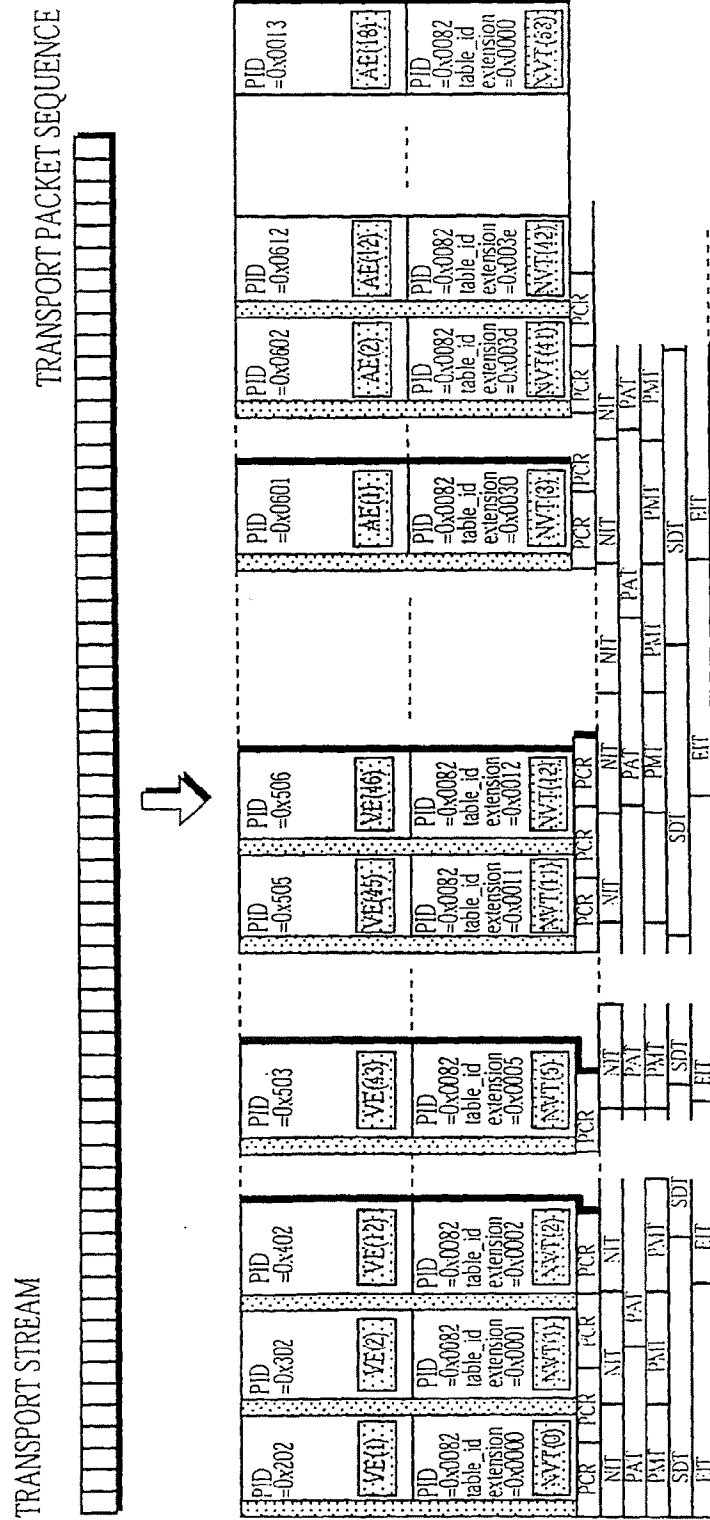


FIG. 2A

NARRATION INCLUDED IN AUDIO ELEMENT[1](PID=0x0601)

INTRODUCING INTERACTIVE CHANNEL.  
THANK YOU FOR SELECTING THE 'A' BROADCAST.  
FOR TODAY'S BROADCAST, WE WILL BE SHOWING  
THE FOLLOWING PROGRAMS. WE ARE SURE YOU  
WILL ENJOY THEM.

MOTION PICTURE INCLUDED IN VIDEO ELEMENT[1](PID=0X202)  
SHOT OF A BROADCASTING COMPANY ANNOUNCER(120 SECONDS)

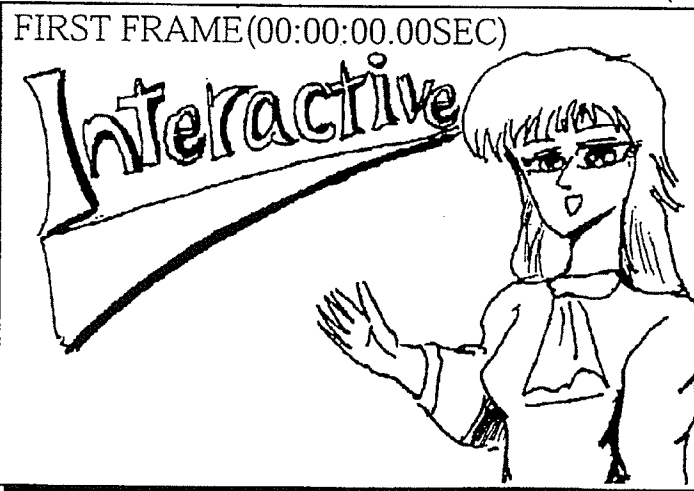


FIG. 2B

NARRATION INCLUDED IN AUDIO ELEMENT[2] (PID=0x0602)

NEW MOVIE INFORMATION.  
COMING UP SOON AT THEATERS IN OSAKA.

MOTION PICTURE INCLUDED IN VIDEO ELEMENT[2] (PID=0X302)  
PREVIEW OF NEW MOVIES(360 SECONDS)

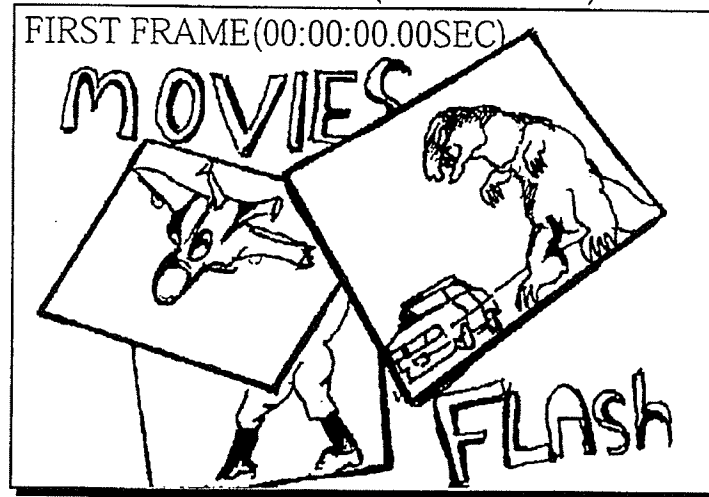


FIG. 2C

NARRATION INCLUDED IN AUDIO ELEMENT[12]

COMING UP NOW HIGHLIGHTS FROM "THE TERROR  
OF THE HUGE TORNADO" (DISTRIBUTED BY AAA  
COMPANY). PLEASE SELECT YOUR DESIRED SCENE.

MOTION PICTURE INCLUDED IN VIDEO ELEMENT[12]

DIGEST VERSION OF "THE TERROR OF THE HUGE TORNADO"  
DISTRIBUTED BY AAA COMPANY (120 SECONDS)

FIRST FRAME (00:00:00.00SEC)

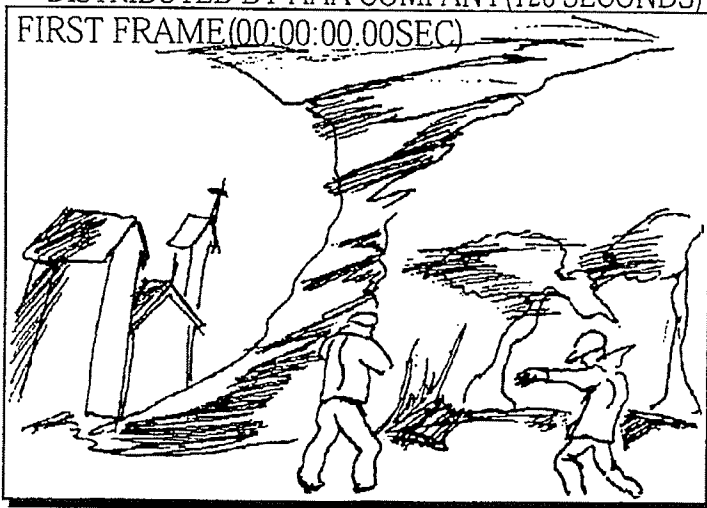


FIG. 2D

NARRATION INCLUDED IN AUDIO ELEMENT[43]

INTRODUCING THE CAST OF "THE TERROR OF THE HUGE  
TORNADO" (DISTRIBUTED BY AAA COMPANY).  
PLEASE SELECT AN ACTOR/ACTRESS.

MOTION PICTURE INCLUDED IN VIDEO ELEMENT[43]  
SHOTS OF THE MAIN CAST OF "THE TERROR OF THE HUGE TORNADO"  
DISTRIBUTED BY AAA COMPANY

FIRST FRAME(00:00:00.00SEC)

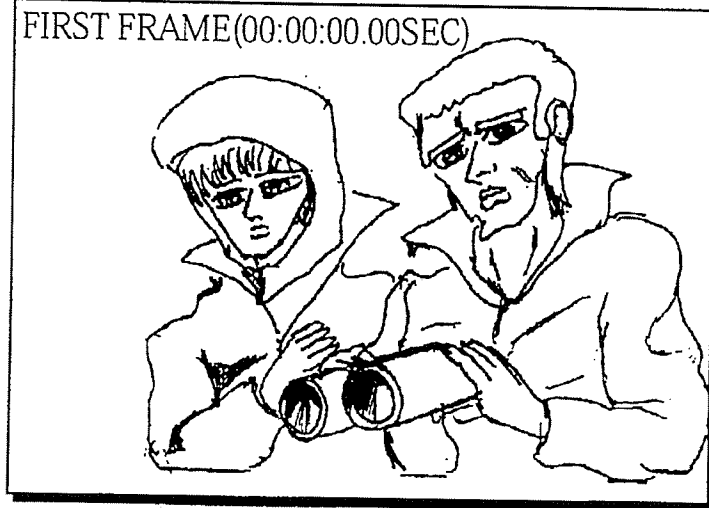


FIG. 3

NVT[1]

Object Definition Table

Index	type	X-coordinate	Y-coordinate	HANDLER	Normal_Bitmap	Forcused_Bitmap
1	Button	50	50	HD_Index[1]	bitmap1	bitmap101
2	Button	100	50	HD_Index[2]	bitmap2	bitmap102
3	Button	50	100	HD_Index[3]	bitmap3	bitmap103
4	Button	100	100	HD_Index[4]	bitmap4	bitmap104

302

Handler Definition Table

HD_Index	Script
1	goto_content(HL_index1)
2	goto_content(HL_index2)
3	goto_content(HL_index3)
4	goto_content(HL_index4)

303

Hyperlink Table

HL_Index	orig_nv_id	ts_id	VE_svc_id	VE_event_id	VE_comp_tag	AC_svc_id	AE_event_id	AE_comp_tag	NE_svc_id	NE_event_id	NE_id_EXT	rank
1	-	-	-	-	0x0002	-	-	0x0102	-	-	0x0002	1
2	-	-	-	-	0x0003	-	-	0x0103	-	-	0x0003	2
3	-	-	-	-	0x0004	-	-	0x0104	-	-	0x0004	3
4	-	-	-	-	0x0005	-	-	0x0105	-	-	0x0005	4

304

Bitmap Table

301

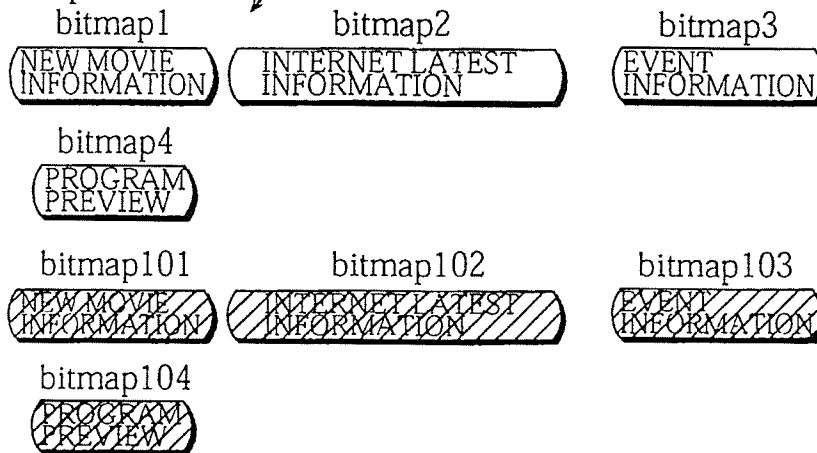


FIG. 4

NVT[2]

Object Definition Table

Index	type	X-coordinate	Y-coordinate	HANDLER	Normal_Bitmap	Forcused_Bitmap
1	Button	75	50	HD_Index[1]	bitmap1	bitmap105
2	Button	125	50	HD_Index[2]	bitmap2	bitmap106
3	Button	100	100	HD_Index[3]	bitmap3	bitmap107
4	Button	150	120	HD_Index[4]	bitmap4	bitmap108

Handler Definition Table

HD_Index	Script
1	goto_content(HL_index1)
2	goto_content(HL_index2)
3	goto_content(HL_index3)
4	goto_content(HL_index4)

Hyperlink Table

HL_Index	orig_nw_id	ts_id	VE_svc_id	VE_event_id	VE_comp_tag	AC_svc_id	AE_event_id	AE_comp_tag	NE_svc_id	NE_event_id	NE_id_EXT	rank
1	—	—	—	—	0x0011	—	—	0x00111	—	—	0x0011	1
2	—	—	—	—	0x0012	—	—	0x00112	—	—	0x0012	2
3	—	—	—	—	0x0021	—	—	0x00121	—	—	0x0021	3
4	—	—	—	—	0x0001	—	—	0x00101	—	—	0x0001	4

Bitmap Table

bitmap5	bitmap6
THE TERROR OF THE HUGE TORNADO (DISTRIBUTED BY AAA COMPANY)	THE RETURN OF THE MONSTROUS DINOSAURS(DISTRIBUTED BY BBB COMPANY)
bitmap7	bitmap8
SPORTS WARS(DISTRIBUTED BY AAA COMPANY)	RETURN
bitmap105	bitmap106
THE TERROR OF THE HUGE TORNADO (DISTRIBUTED BY AAA COMPANY)	THE RETURN OF THE MONSTROUS DINOSAURS(DISTRIBUTED BY BBB COMPANY)
bitmap107	bitmap108
SPORTS WARS(DISTRIBUTED BY AAA COMPANY)	RETURN

NVT[12] FIG. 5

Object Definition Table

Index	type	X-coordinate	Y-coordinate	HANDLER	Normal_Bitmap	Focused_Bitmap
1	Button	25	25	HD_Index[1]	bitmap41	bitmap141
2	Button	75	25	HD_Index[2]	bitmap42	bitmap142
3	Button	25	50	HD_Index[3]	bitmap43	bitmap143
4	Button	75	50	HD_Index[4]	bitmap44	bitmap144
5	Button	25	75	HD_Index[5]	bitmap45	bitmap145
6	Button	25	100	HD_Index[6]	bitmap46	bitmap146
7	Button	75	100	HD_Index[7]	bitmap47	bitmap147
8	Button	25	125	HD_Index[8]	bitmap48	bitmap148
9	Button	75	125	HD_Index[9]	bitmap49	bitmap149
10	Button	100	125	HD_Index[10]	bitmap50	bitmap150

Handler Definition Table

HD_Index	Script
1	goto_content(HL_index1)
2	goto_content(HL_index2)
3	goto_content(HL_index3)
4	goto_content(HL_index4)

Hyperlink Table

HL_Index	orig_nw_id	ts_id	VE_svc_id	VE_event_id	VE_comp_tag	AC_svc_id	AE_event_id	AE_comp_tag	NE_svc_id	NE_event_id	NE_id_EXT	rank
1	—	—	—	—	0x0041	—	—	0x0141	—	—	0x0041	7
2	—	—	—	—	0x0042	—	—	0x0142	—	—	0x0042	6
3	—	—	—	—	0x0043	—	—	0x0143	—	—	0x0043	4
4	—	—	—	—	0x0044	—	—	0x0144	—	—	0x0044	5
5	—	—	—	—	0x0045	—	—	0x0145	—	—	0x0045	1
6	—	—	—	—	0x0046	—	—	0x0146	—	—	0x0046	3
7	—	—	—	—	0x0047	—	—	0x0147	—	—	0x0047	2
8	—	—	—	—	0x0048	—	—	0x0148	—	—	0x0048	8
9	—	—	—	—	0x0049	—	—	0x0149	—	—	0x0049	9
10	—	—	—	—	0x0050	—	—	0x0150	—	—	0x0050	10

Bitmap Table

Bitmap41	OPENING	Bitmap43	ENTRANCE OF THE ENTIRE CAST
Bitmap45	WHOLE TOWN IN PANIC	Bitmap46	WEATHER REPORT
Bitmap48	CLIMAX	Bitmap42	STORM IN X STATE
Bitmap44	WEATHER REPORT	Bitmap47	THE BIGGEST TORNADO IN HISTORY DEVELOPS
Bitmap49	ENDING	Bitmap50	RETURN



FIG. 6

Program Map Table

table\_id=0x02

:

program\_number=0x0001

PCR\_PID=0x0081

:

PID	stream_type	descriptor	
0x0302	—	stream_identifier_descritor	component_tag0x0002
0x0303	—	stream_identifier_descritor	component_tag0x0003
0x0304	—	stream_identifier_descritor	component_tag0x0004
0x0305	—	stream_identifier_descritor	component_tag0x0005
:	:	:	:
0x0401	—	stream_identifier_descritor	component_tag0x0011
0x0402	—	stream_identifier_descritor	component_tag0x0012
0x0403	—	stream_identifier_descritor	component_tag0x0021
:	:	:	:
0x0601	—	stream_identifier_descritor	component_tag0x0101
0x0602	—	stream_identifier_descritor	component_tag0x0102
0x0603	—	stream_identifier_descritor	component_tag0x0103
0x0604	—	stream_identifier_descritor	component_tag0x0104
0x0605	—	stream_identifier_descritor	component_tag0x0105
0x0606	—	stream_identifier_descritor	component_tag0x0106



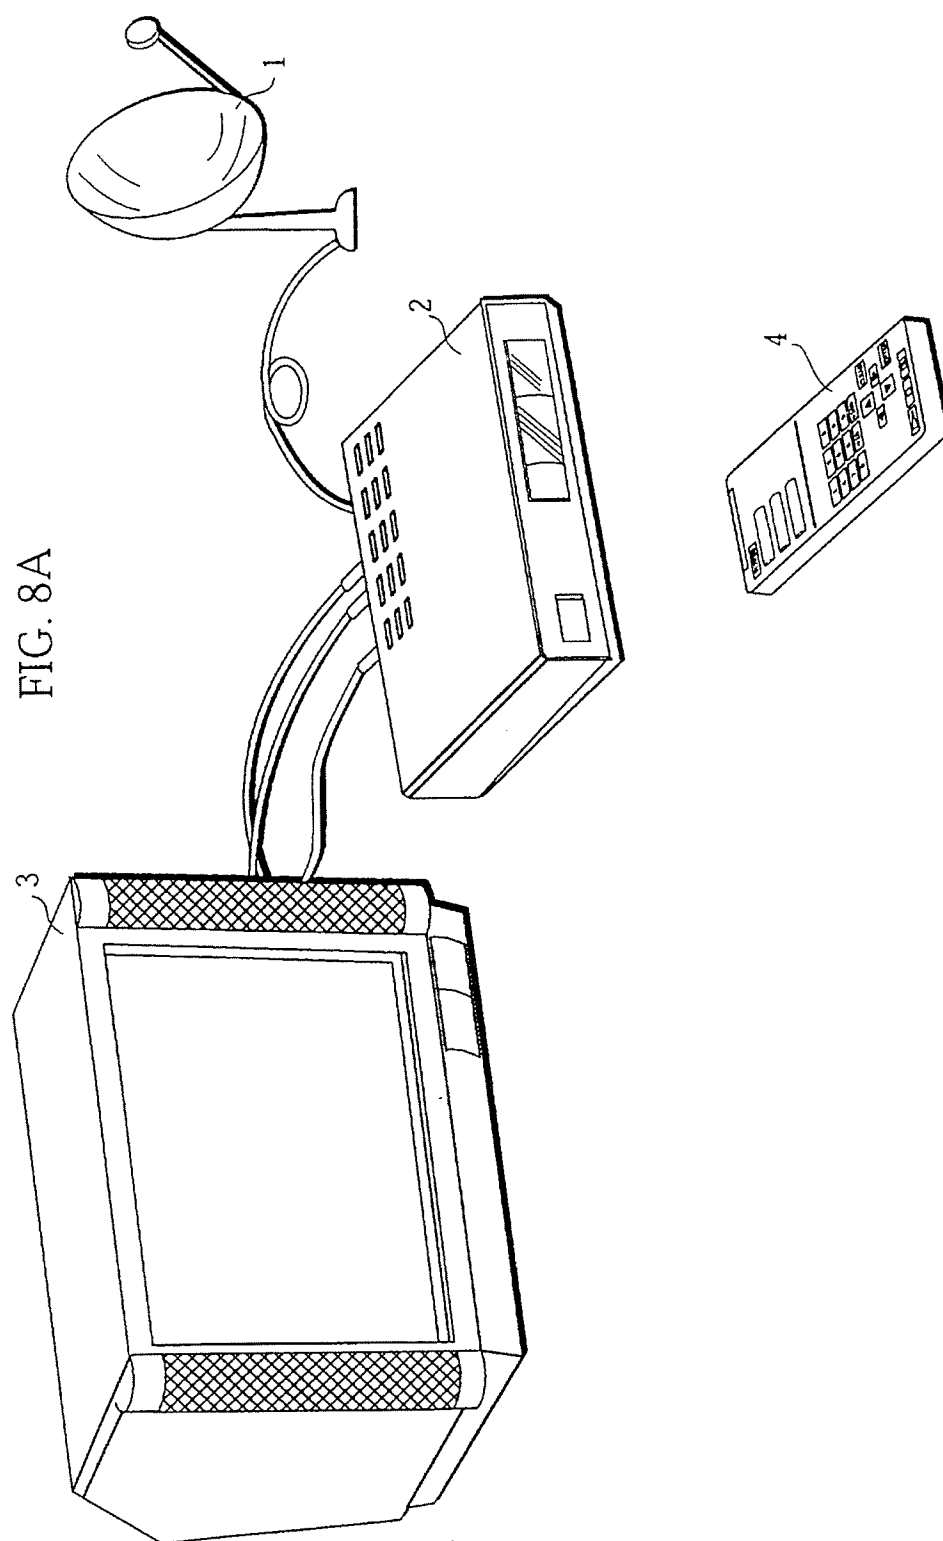


FIG. 8B

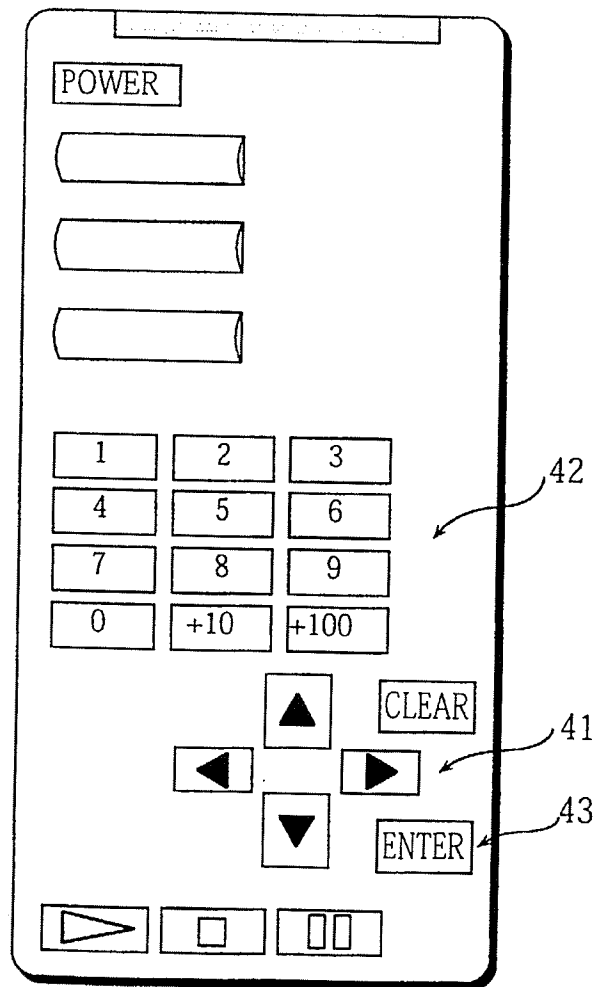


FIG. 9

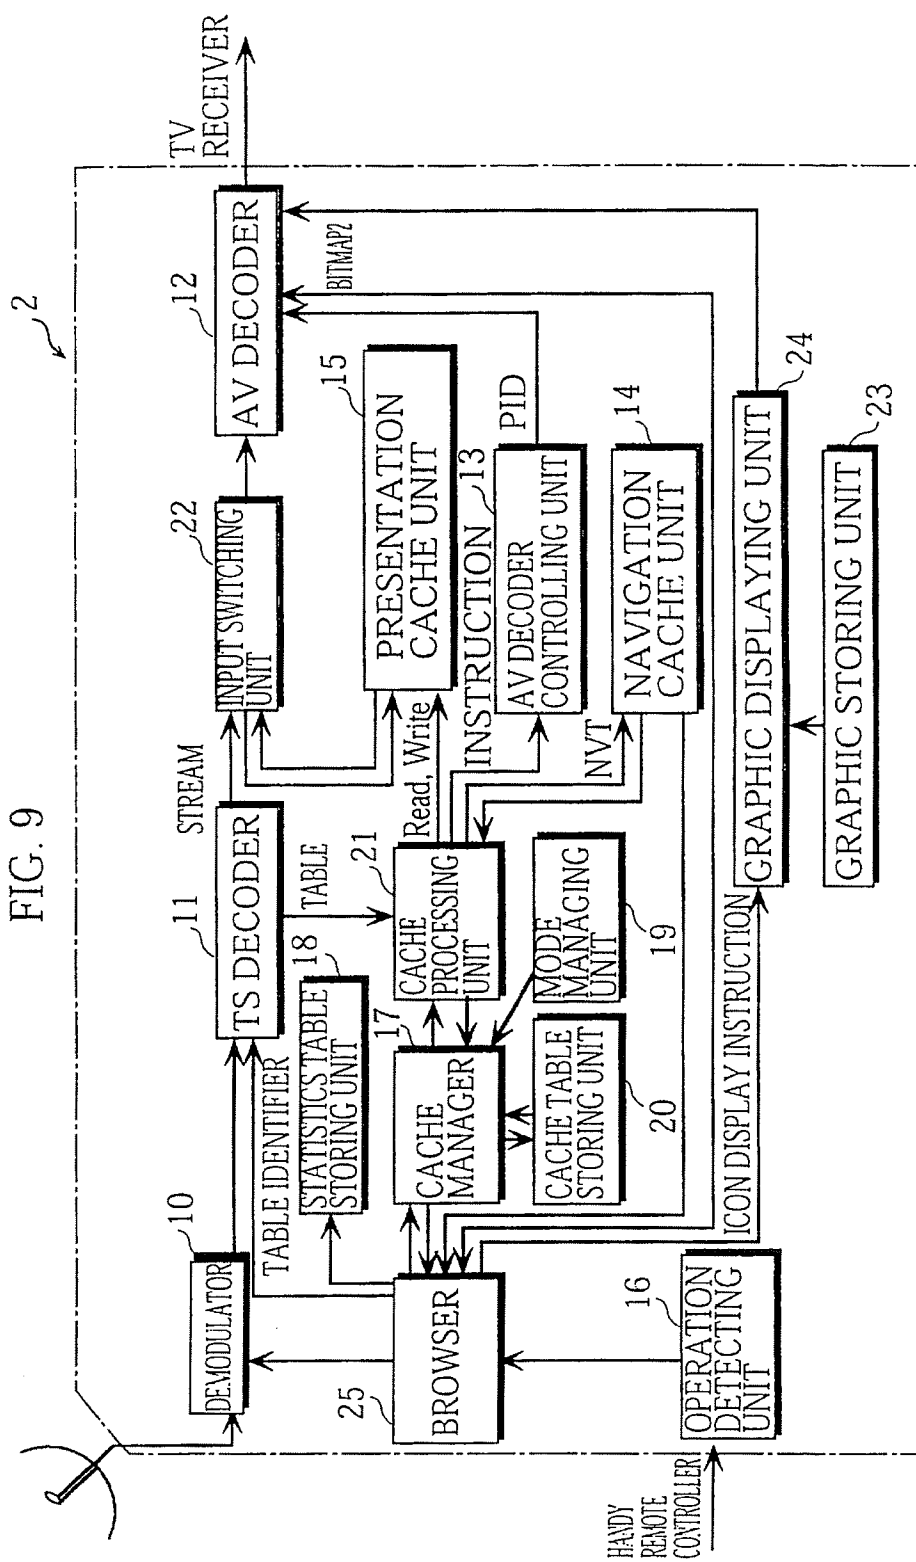


FIG. 10A  
NAVIGATION CACHE UNIT

	NVT	DISPLAY HISTORY MARK
1	NVT[1]	HIT
2	NVT[2]	NOT JUDGED
3	NVT[3]	NOT JUDGED
4	NVT[4]	NOT JUDGED
5	NVT[5]	NOT JUDGED

FIG. 10B  
NAVIGATION CACHE UNIT

	NVT	DISPLAY HISTORY MARK
1	NVT[1]	HIT
2	NVT[2]	HIT
3	NVT[3]	MISSED
4	NVT[4]	MISSED
5	NVT[5]	MISSED

FIG. 10C  
NAVIGATION CACHE UNIT

	NVT	DISPLAY HISTORY MARK
1	NVT[1]	HIT
2	NVT[2]	HIT
3	FREE AREA	
4	FREE AREA	
5	FREE AREA	

FIG. 10D  
NAVIGATION CACHE UNIT

	NVT	DISPLAY HISTORY MARK
1	NVT[1]	HIT
2	NVT[2]	HIT
3	NVT[11]	NOT JUDGED
4	NVT[12]	NOT JUDGED
5	NVT[21]	NOT JUDGED

FIG. 10E  
NAVIGATION CACHE UNIT

	NVT	DISPLAY HISTORY MARK
1	NVT[1]	● HIT
2	NVT[2]	● HIT
3	NVT[11]	MISSED
4	NVT[12]	● HIT
5	NVT[21]	MISSED

FIG. 10F  
NAVIGATION CACHE UNIT

	NVT	DISPLAY HISTORY MARK
1	NVT[1]	● HIT
2	NVT[2]	● HIT
3	NVT[12]	● HIT
4	FREE AREA	
5	FREE AREA	

FIG. 10G  
NAVIGATION CACHE UNIT

	NVT	DISPLAY HISTORY MARK
1	NVT[41]	NOT JUDGED
2	NVT[42]	NOT JUDGED
3	NVT[12]	● HIT
4	NVT[43]	NOT JUDGED
5	NVT[44]	NOT JUDGED

FIG. 11A

## PRESENTATION CACHE UNIT

	PRESENTATION STREAM	DISPLAY HISTORY MARK	MOTION PICTURE/FRAME
1	PRESENTATION STREAM[1]	● HIT	MOTION PICTURE
2	PRESENTATION STREAM[2]	NOT JUDGED	MOTION PICTURE
3	PRESENTATION STREAM[3]	NOT JUDGED	MOTION PICTURE
4	PRESENTATION STREAM[4]	NOT JUDGED	FRAME
5	PRESENTATION STREAM[5]	NOT JUDGED	FRAME

FIG. 11B

## PRESENTATION CACHE UNIT

	PRESENTATION STREAM	DISPLAY HISTORY MARK	MOTION PICTURE/FRAME
1	PRESENTATION STREAM[1]	● HIT	MOTION PICTURE
2	PRESENTATION STREAM[2]	● HIT	MOTION PICTURE
3	PRESENTATION STREAM[3]	NOT JUDGED	MOTION PICTURE
4	PRESENTATION STREAM[4]	NOT JUDGED	FRAME
5	PRESENTATION STREAM[5]	NOT JUDGED	FRAME

FIG. 11C

## PRESENTATION CACHE UNIT

	PRESENTATION STREAM	DISPLAY HISTORY MARK	MOTION PICTURE/FRAME
1	PRESENTATION STREAM[1]	● HIT	MOTION PICTURE
2	PRESENTATION STREAM[2]	● HIT	MOTION PICTURE
3	FREE AREA		
4	FREE AREA		
5	FREE AREA		



FIG. 11D

## PRESENTATION CACHE UNIT

	PRESENTATION STREAM	DISPLAY HISTORY MARK	MOTION PICTURE/FRAME
1	PRESENTATION STREAM[1]	●HIT	MOTION PICTURE
2	PRESENTATION STREAM[2]	●HIT	MOTION PICTURE
3	PRESENTATION STREAM[11]	NOT JUDGED	MOTION PICTURE
4	PRESENTATION STREAM[12]	NOT JUDGED	FRAME
5	PRESENTATION STREAM[21]	NOT JUDGED	FRAME

FIG. 11E

## PRESENTATION CACHE UNIT

	PRESENTATION STREAM	DISPLAY HISTORY MARK	MOTION PICTURE/FRAME
1	PRESENTATION STREAM[1]	●HIT	MOTION PICTURE
2	PRESENTATION STREAM[2]	●HIT	MOTION PICTURE
3	PRESENTATION STREAM[11]	MISSED	MOTION PICTURE
4	PRESENTATION STREAM[12]	●HIT	FRAME
5	PRESENTATION STREAM[21]	MISSED	FRAME

FIG. 11F

## PRESENTATION CACHE UNIT

	PRESENTATION STREAM	DISPLAY HISTORY MARK	MOTION PICTURE/FRAME
1	PRESENTATION STREAM[1]	●HIT	MOTION PICTURE
2	PRESENTATION STREAM[2]	●HIT	MOTION PICTURE
3	PRESENTATION STREAM[12]	●HIT	FRAME
4	FREE AREA		
5	FREE AREA		

FIG. 11G

PRESENTATION CACHE UNIT

	PRESENTATION STREAM	DISPLAY HISTORY MARK	MOTION PICTURE/FRAME
1	PRESENTATION STREAM[41]	NOT JUDGED	
2	PRESENTATION STREAM[42]	NOT JUDGED	
3	PRESENTATION STREAM[12]	HIT	FRAME
4	PRESENTATION STREAM[43]	NOT JUDGED	
5	PRESENTATION STREAM[44]	NOT JUDGED	

FIG. 12

	STATISTICS VALUE		STATISTICS VALUE
NVT[1]	15	NVT[41]	18
NVT[2]	16	NVT[42]	17
NVT[3]	18	NVT[43]	16
NVT[4]	4	NVT[44]	15
NVT[5]	6	NVT[45]	14
NVT[6]	10	NVT[46]	7
NVT[7]	11	NVT[47]	3
NVT[8]	12	NVT[48]	2
NVT[9]	6	NVT[49]	1
NVT[10]	2	NVT[50]	11
NVT[11]	3	NVT[51]	10
NVT[12]	5	NVT[52]	11
NVT[13]	6	NVT[53]	14
NVT[14]	4	NVT[54]	9
NVT[15]	3	NVT[55]	7
NVT[16]	13	NVT[56]	7
NVT[17]	15	NVT[57]	7
NVT[18]	11	NVT[58]	6
NVT[19]	8	NVT[59]	11

FIG. 13A

CACHE TABLE BASED ON STATISTICS VALUES

content[41]
content[42]
content[43]
content[44]
content[45]

FIG. 13B

CACHE TABLE BASED ON RANK

content[45]
content[47]
content[46]
content[43]
content[44]

FIG. 13C

CACHE TABLE BASED ON CURSOR POSITION

content[41]
content[42]
content[43]
content[45]
content[46]

FIG. 14

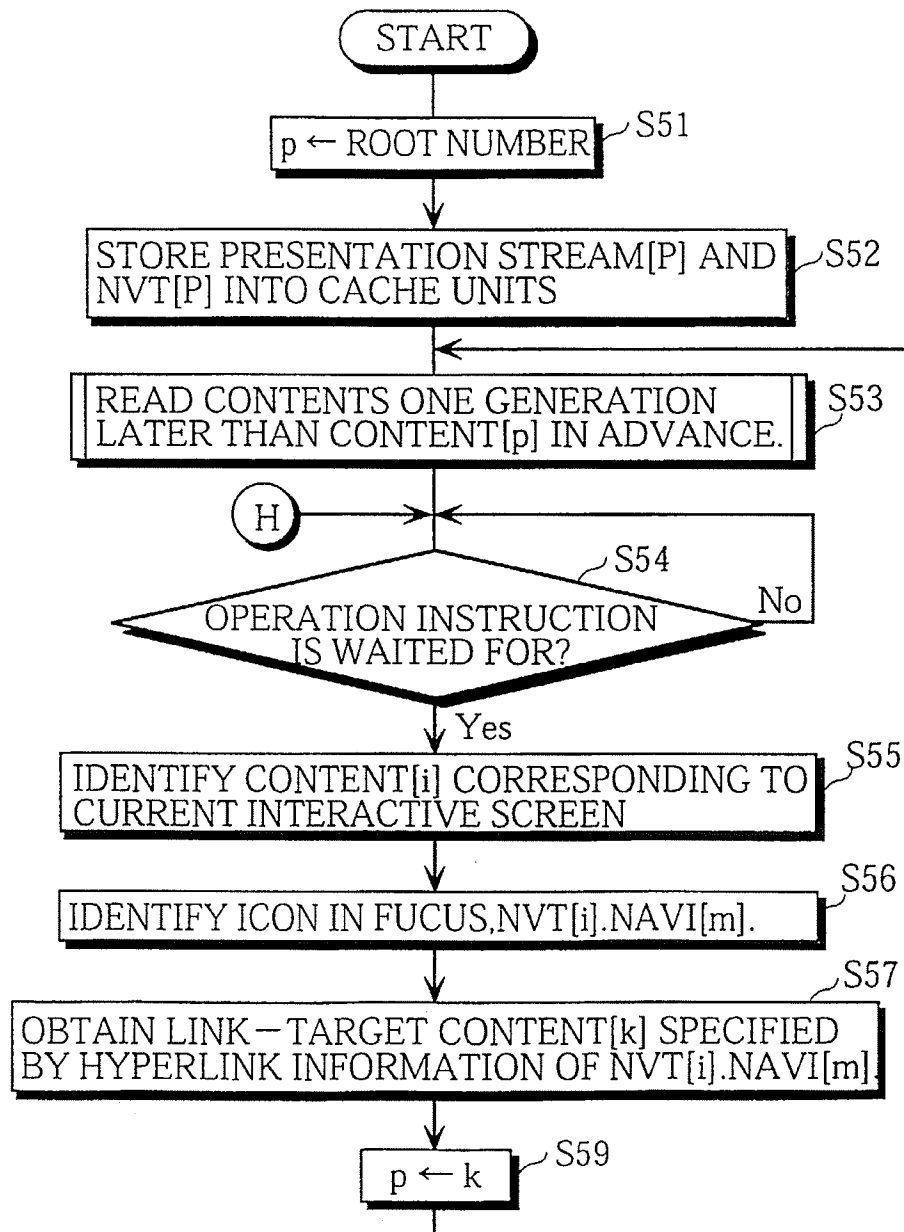


FIG. 15

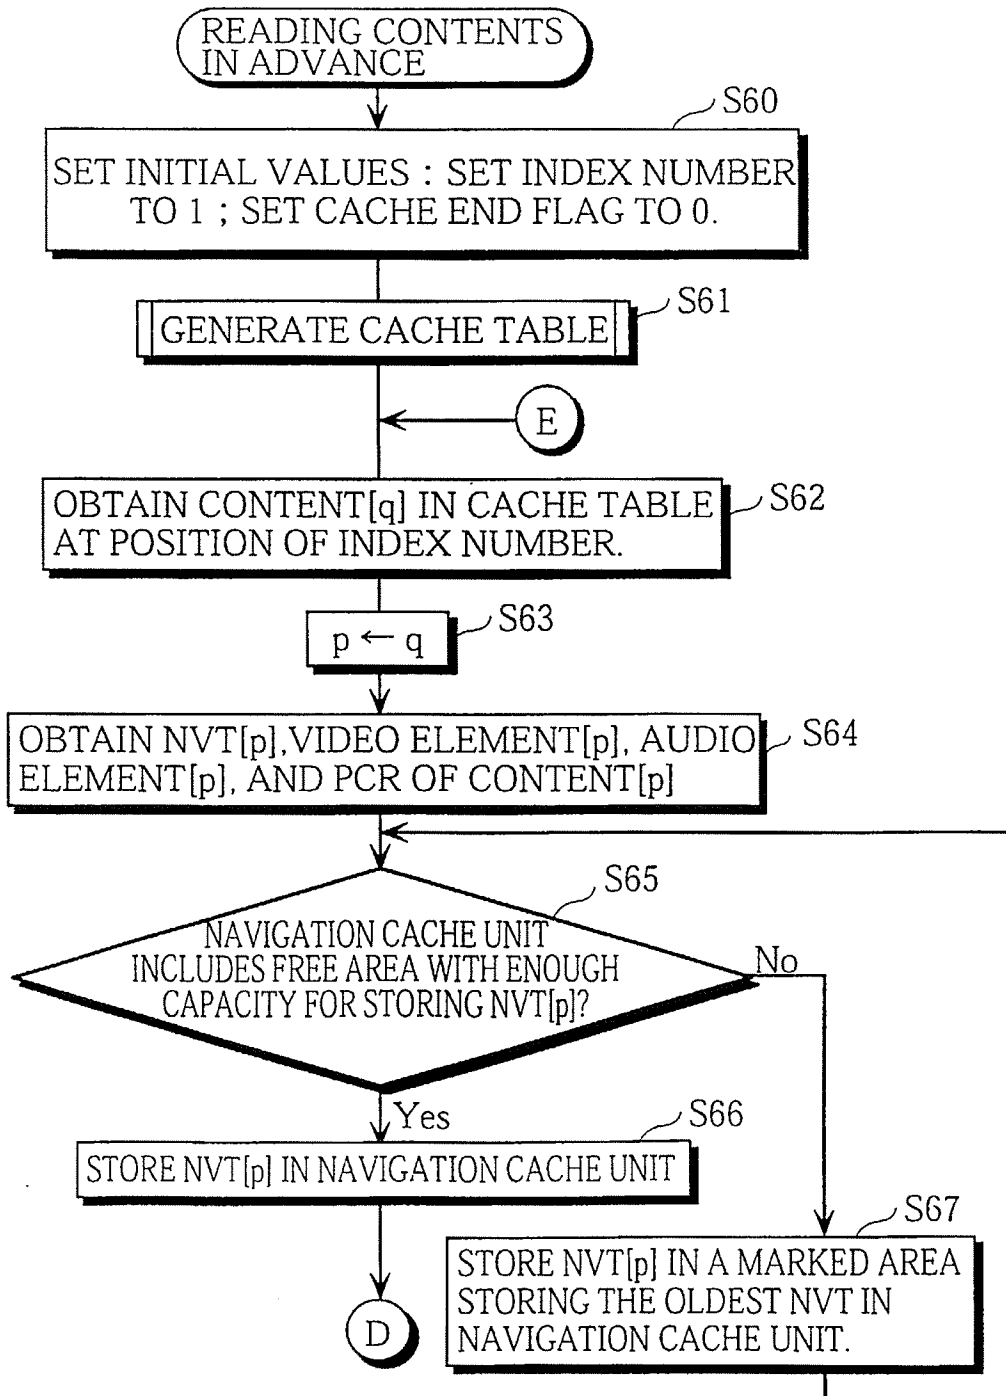


FIG. 16

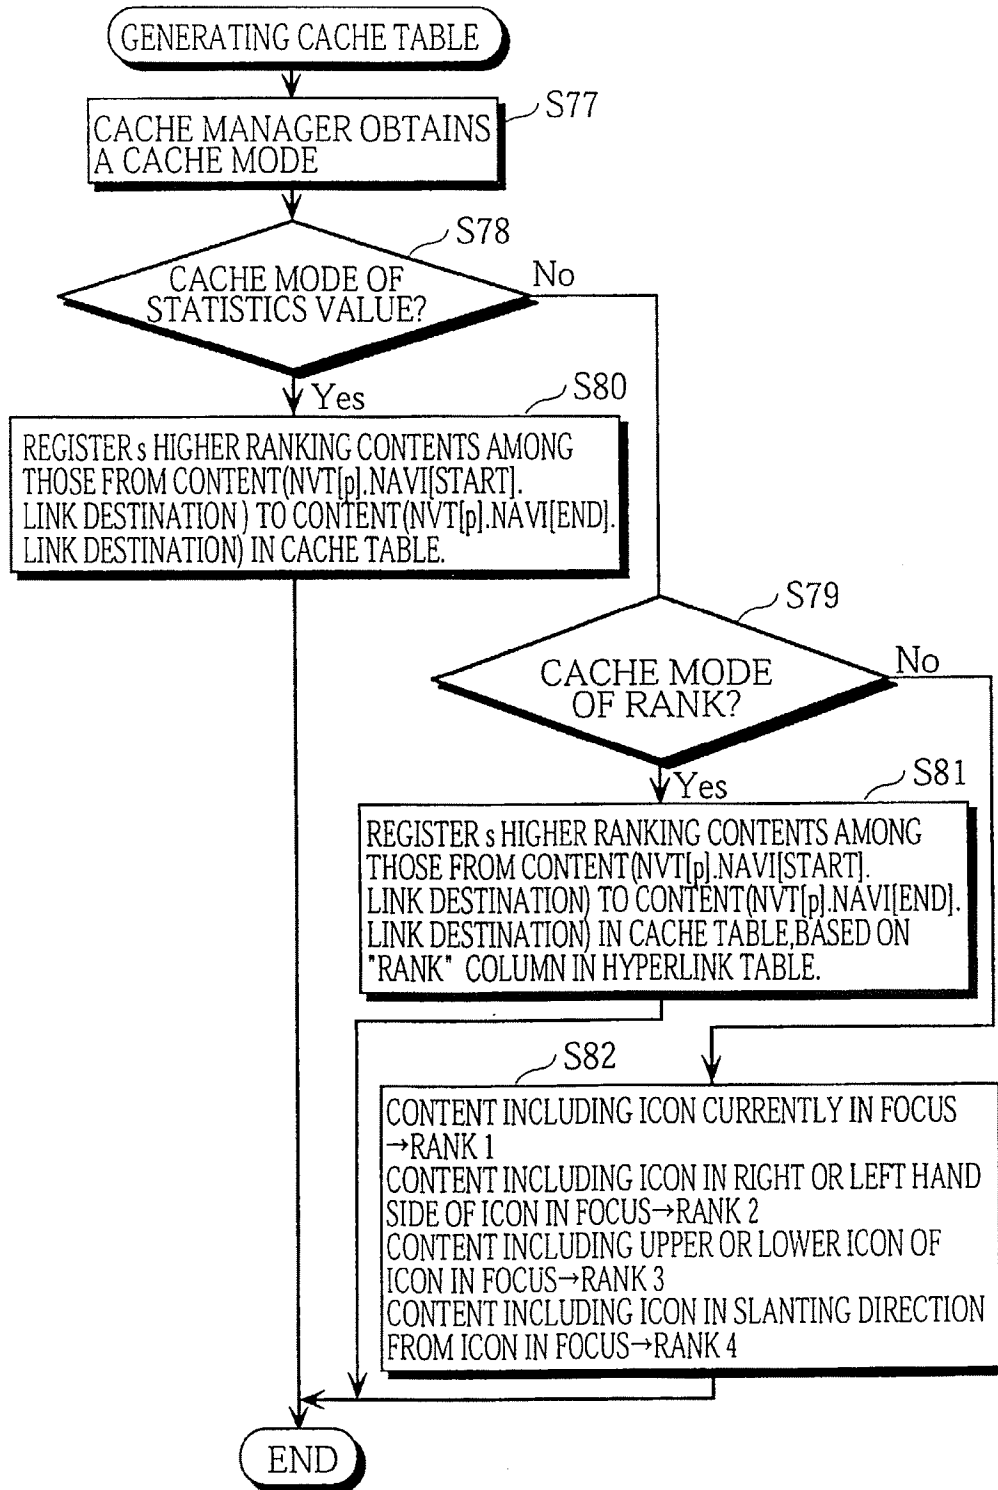


FIG. 17

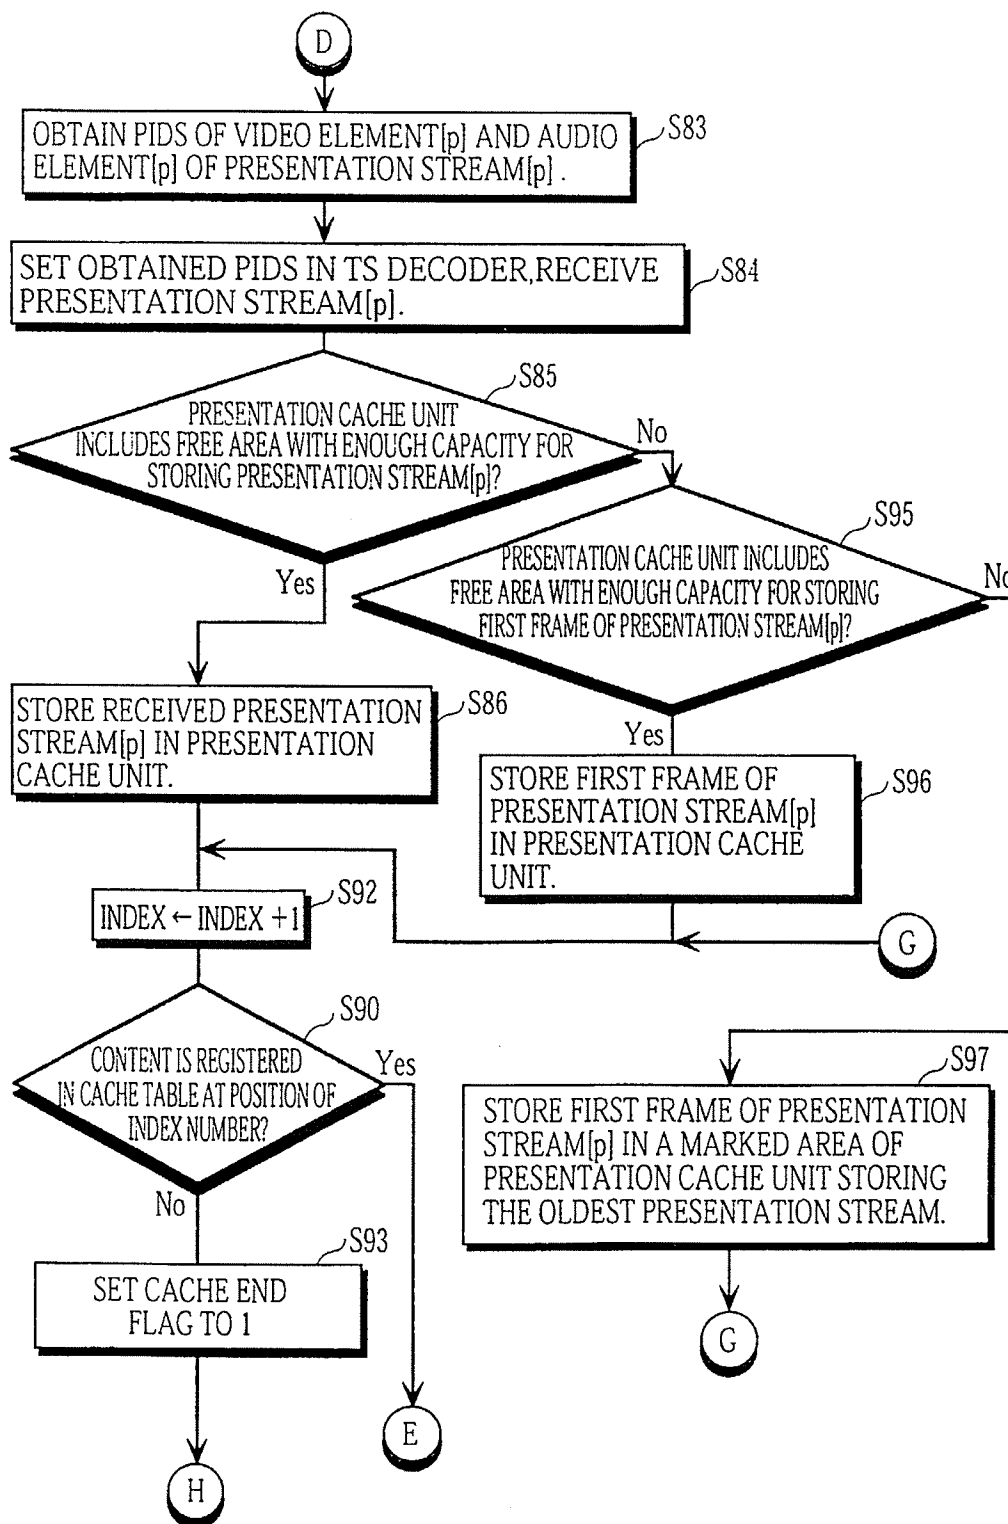




FIG. 18

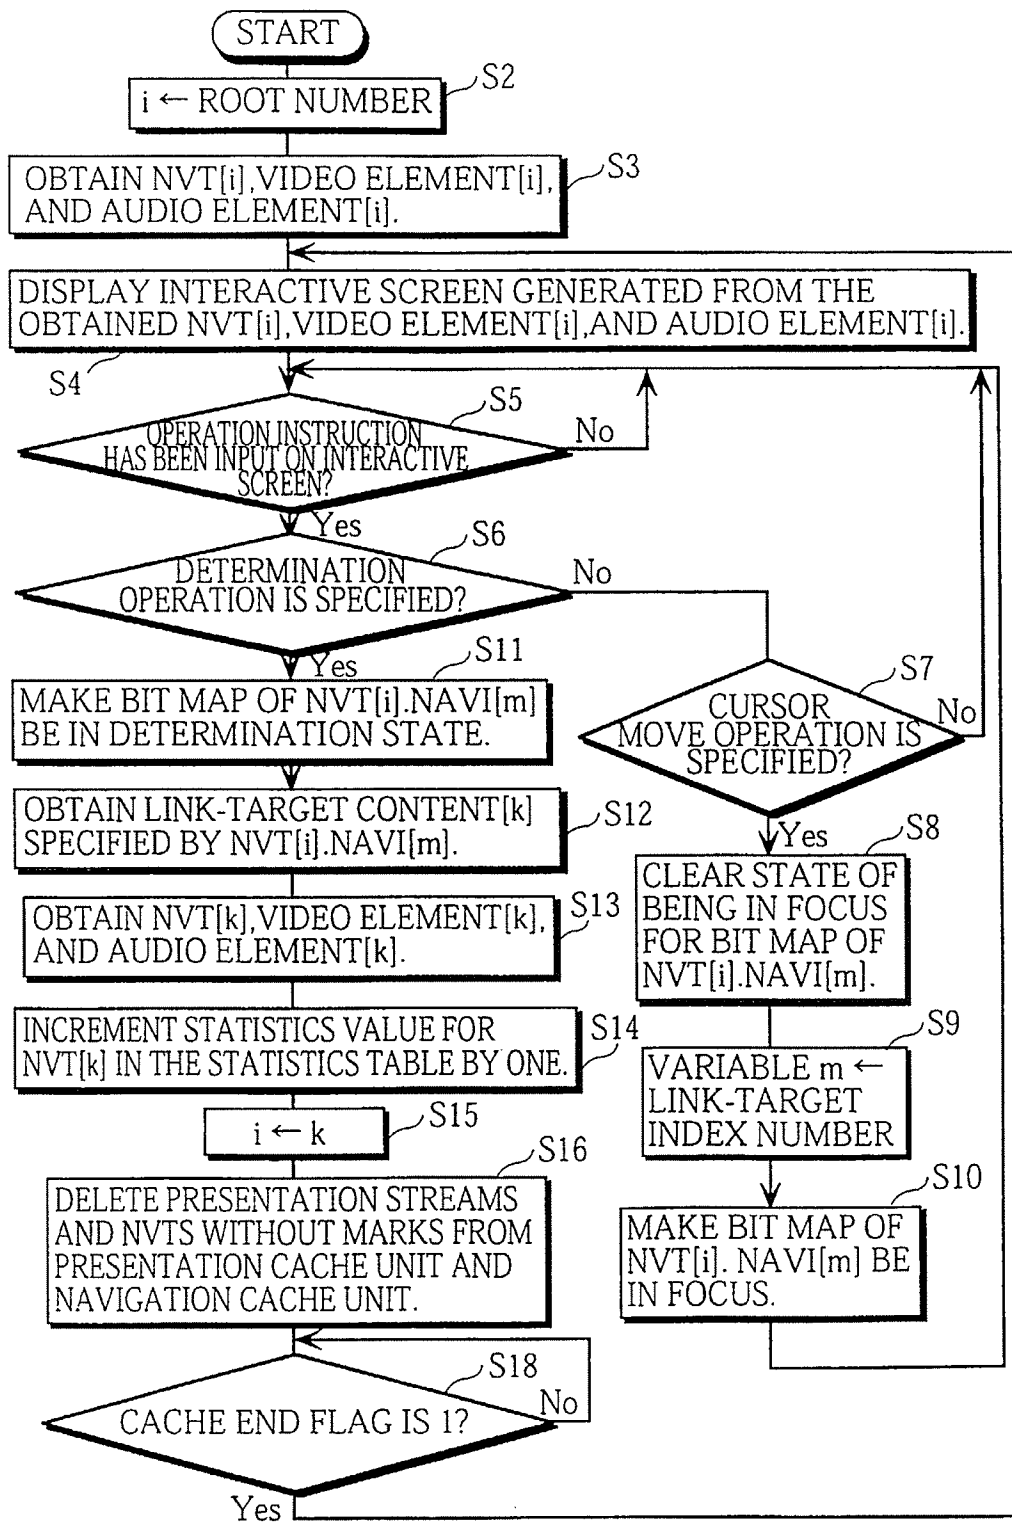


FIG. 19

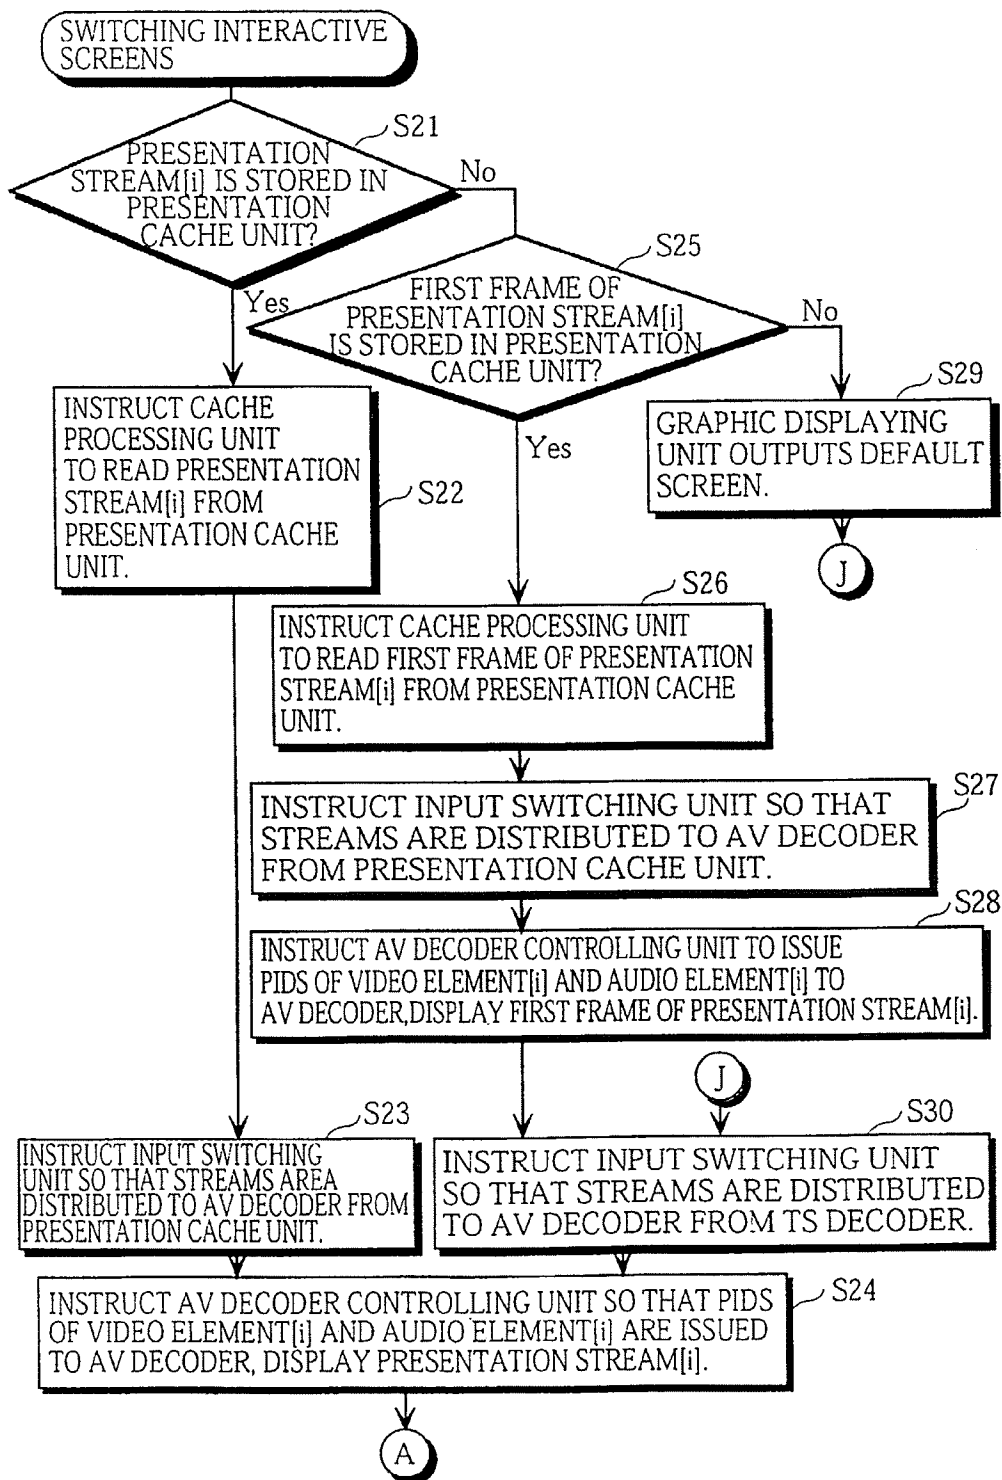


FIG. 20

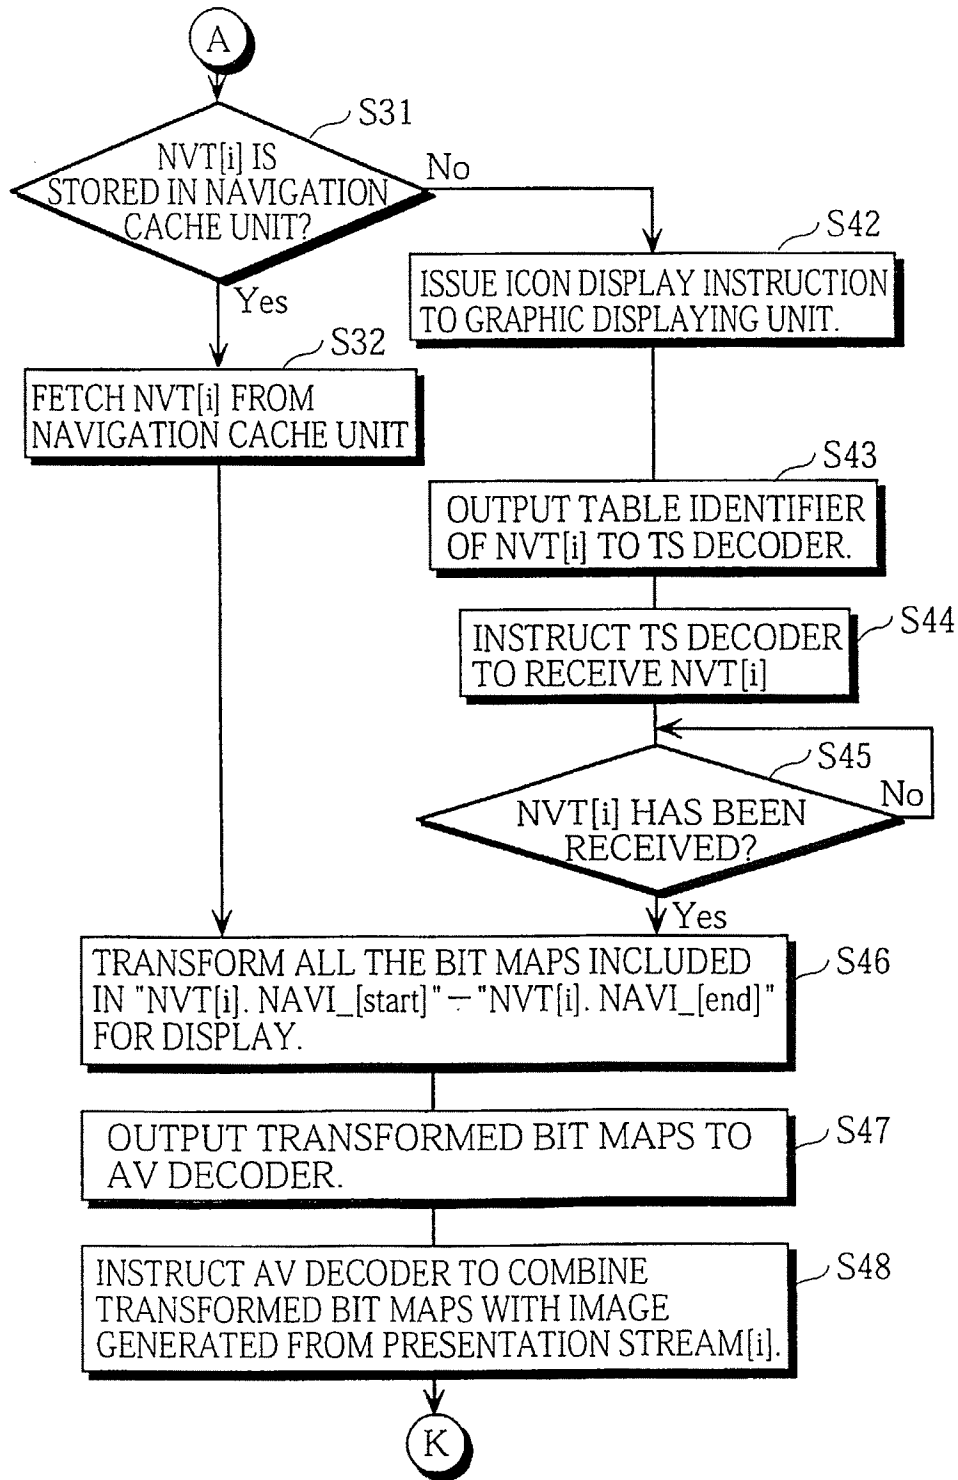


FIG. 21


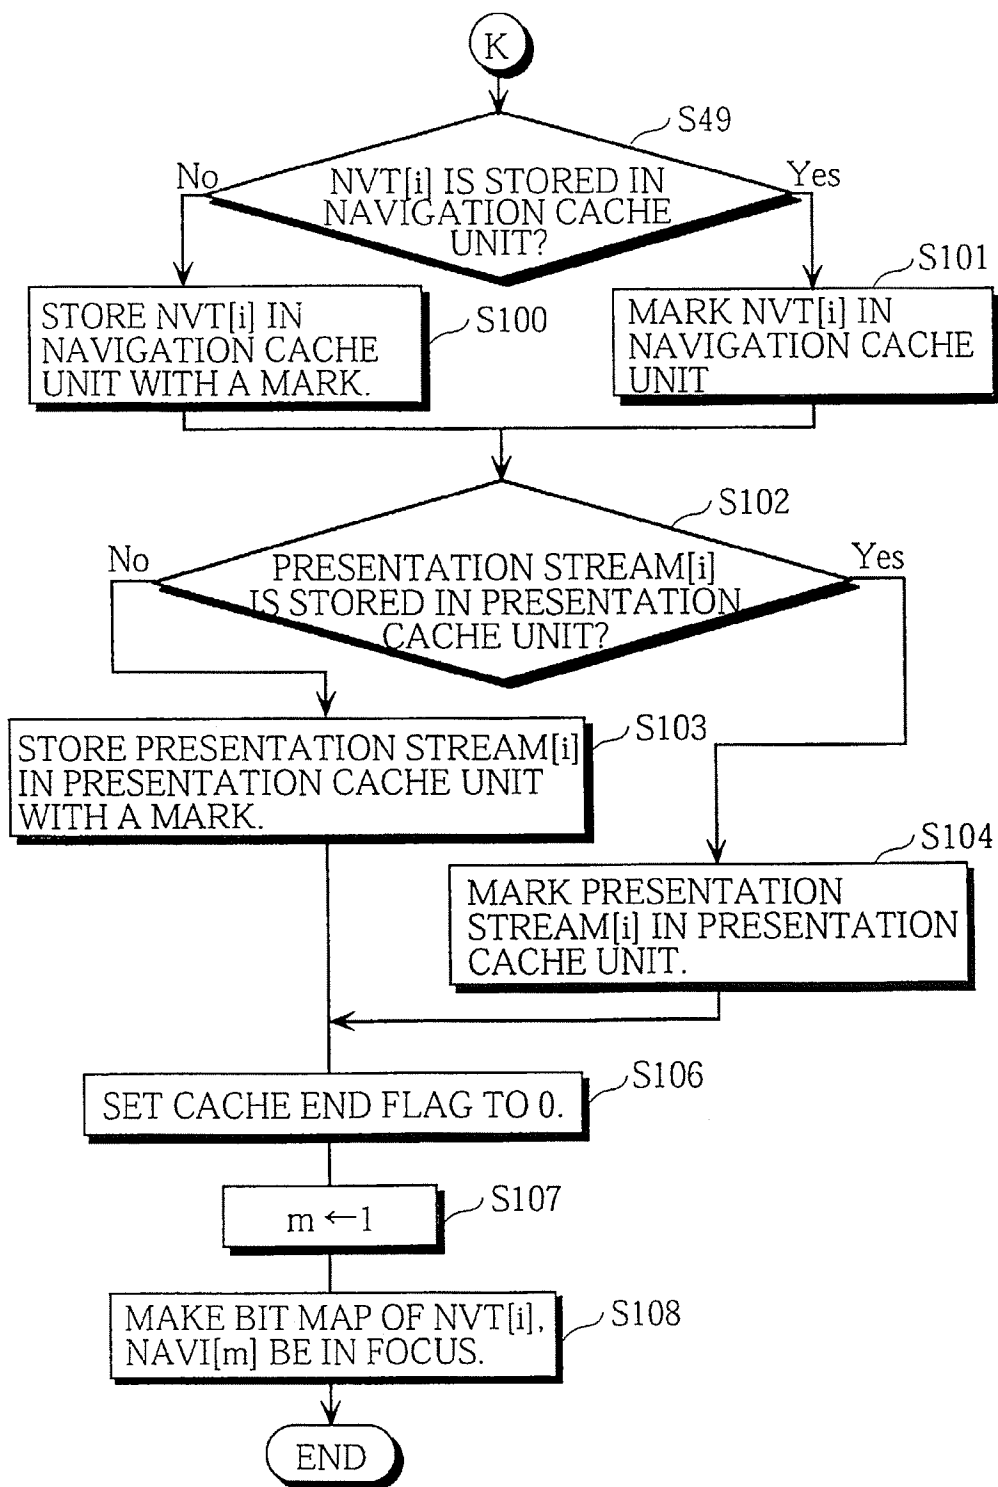


FIG. 22A


IMAGE OF PRESENTATION STREAM[1]  
+ICONS OF NVT[1]

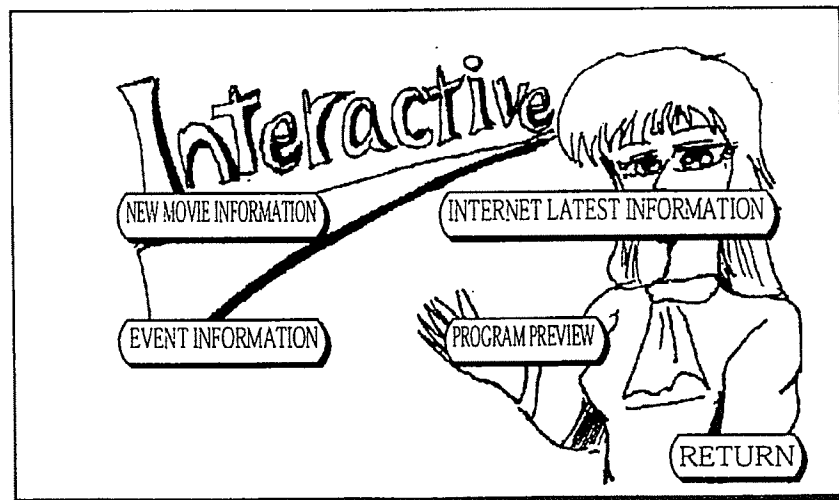

ICON "NEW MOVIE INFORMATION" LINKS TO CONTENT[2]  
ICON "INTERNET LATEST INFORMATION" LINKS TO CONTENT[3]  
ICON "EVENT INFORMATION" LINKS TO CONTENT[4]  
ICON "PROGRAM PREVIEW" LINKS TO CONTENT[5]

FIG. 22B


IMAGE OF PRESENTATION STREAM[2]  
+ ICONS OF NVT[2]

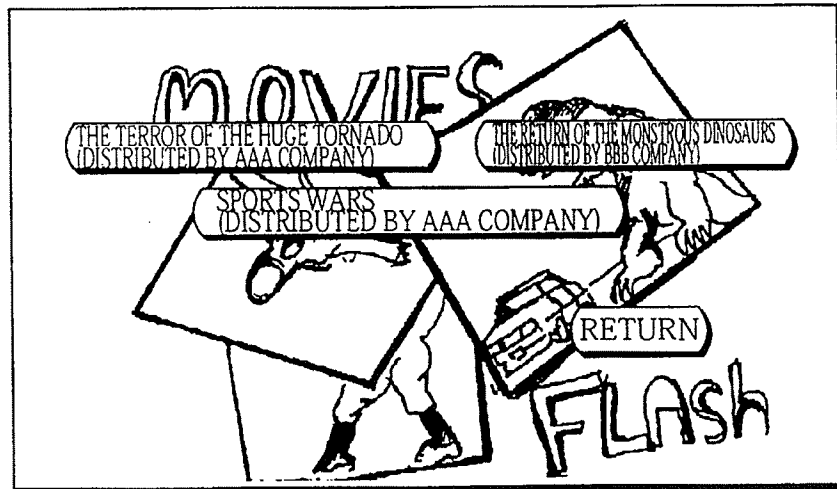

ICON "THE TERROR OF THE HUGE TORNADO" LINKS TO CONTENT[11]  
ICON "THE RETURN OF THE MONSTROUS DINOSAURS" LINKS TO CONTENT[12]  
ICON "SPORTS WARS" LINKS TO CONTENT[21]

FIG. 22C

IMAGE OF PRESENTATION STREAM[12]  
+ ICONS OF NVT[12]

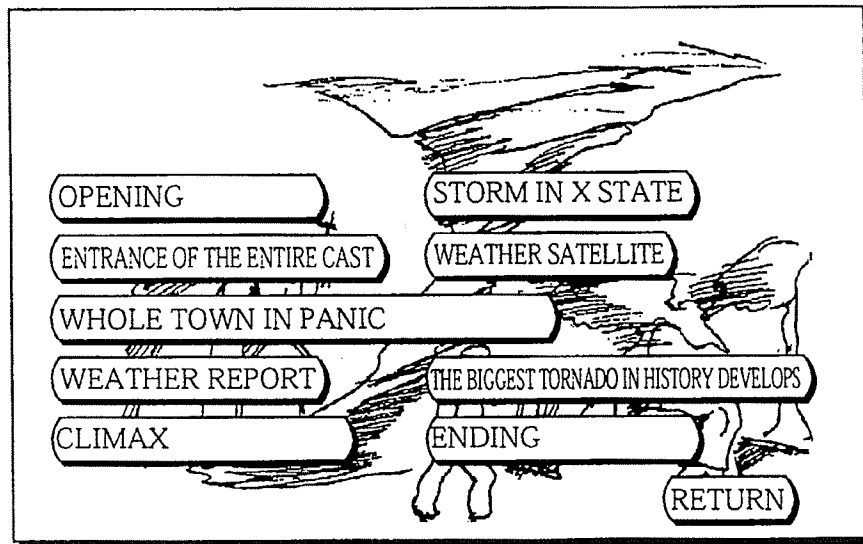

ICON "OPENING" LINKS TO CONTENT[41]  
 ICON "STORM IN X STATE" LINKS TO CONTENT[42]  
 ICON "ENTRANCE OF THE ENTIRE CAST" LINKS TO CONTENT[43]  
 ICON "WEATHER SATELLITE" LINKS TO CONTENT[44]  
 ICON "WHOLE TOWN IN PANIC" LINKS TO CONTENT[45]  
 ICON "WEATHER REPORT" LINKS TO CONTENT[46]  
 ICON "THE BIGGEST TORNADO IN HISTORY DEVELOPS" LINKS TO CONTENT[47]  
 ICON "CLIMAX" LINKS TO CONTENT[48]  
 ICON "ENDING" LINKS TO CONTENT[49]

FIG. 22D

IMAGE OF PRESENTATION STREAM[43]  
+ICONS OF NVT[43]

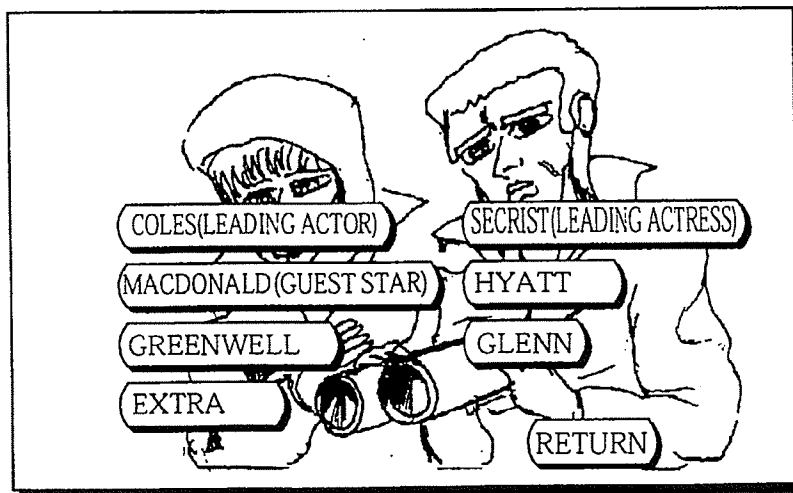




FIG. 23

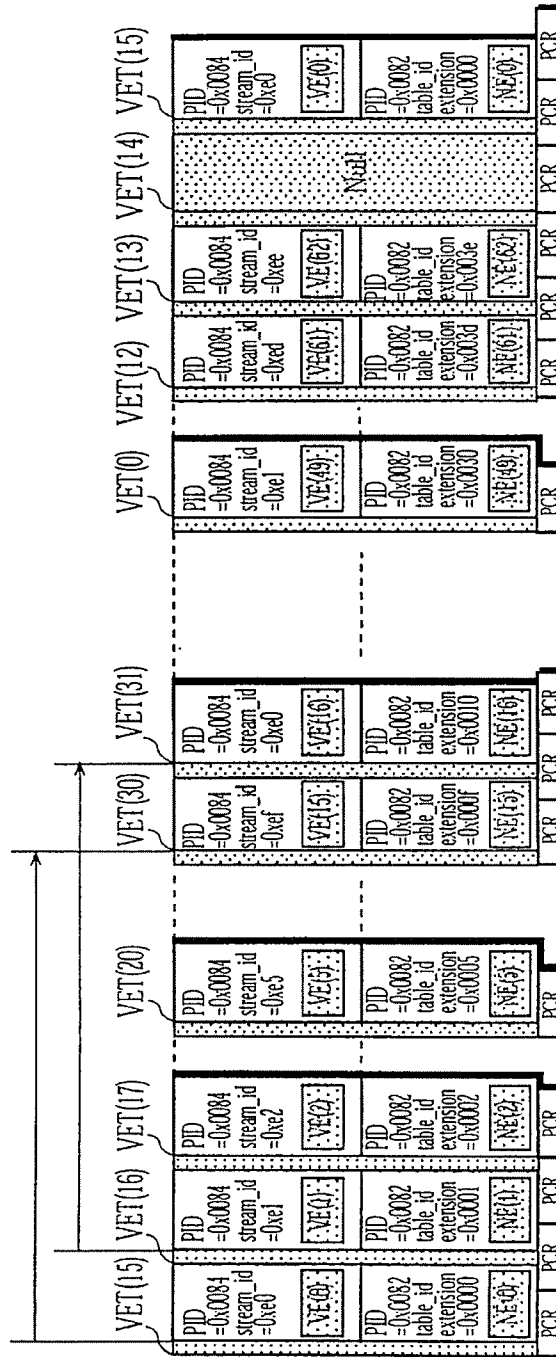


FIG. 24A

VET(15)	PID=0x0083
	VE_id_exetension=0x0001
first_pts	360000
last_pts	360000
stream_id	0xef
component_tag	0x0001

FIG. 24B

VET(16)	PID=0x0083
	VE_id_exetension=0x0000
first_pts	—
last_pts	—
stream_id	0xe0
component_tag	0x0000

FIG. 25

2547

HL_index	orig_nw_id	ts_id	VE_svc_id	VE_event_id	VE_id _extension	AE_svc_id	AE_event_id	AE_id _extension	NE_svc_id	NE_event_id	NE_id
0	0x0001	0x0001	0x0001	0x0001	0x0000	—	—	—	0x0001	0x0001	0x0000
1	0x0001	0x0001	0x0001	0x0001	0x0001	—	—	—	0x0001	0x0001	0x0001
2	0x0001	0x0001	0x0001	0x0001	0x0002	—	—	—	0x0001	0x0001	0x0002
:	:	:	:	:	:	:	:	:	:	:	:
5	0x0001	0x0001	0x0001	0x0001	0x0005	—	—	—	0x0001	0x0001	0x0005
:	:	:	:	:	:	:	:	:	:	:	:



(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
**06.10.1999 Bulletin 1999/40**

(51) Int Cl.<sup>6</sup>: **H04N 7/173, H04N 5/00,**  
**H04N 7/16**

(43) Date of publication A2:  
**04.03.1998 Bulletin 1998/10**

(21) Application number: **97306627.7**

(22) Date of filing: **29.08.1997**

(84) Designated Contracting States:  
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC**  
**NL PT SE**

(30) Priority: **30.08.1996 JP 23002696**

(71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL**  
**CO., LTD.**  
**Kadoma-shi, Osaka 571-0050 (JP)**

(72) Inventors:  

- **Mori, Toshiya**  
**Settsu-shi, Osaka-fu 566 (JP)**
- **Takao, Naoya**  
**Kadoma-shi, Osaka-fu 571 (JP)**
- **Shimoji, Tatsuya**  
**Neyagawa-shi, Osaka-fu 572 (JP)**
- **Okamura, Kazuo**  
**Hirakata-shi, Osaka-fu 573 (JP)**
- **Hirai, Junichi**  
**Suita-shi, Osaka-fu 564 (JP)**

- **Oashi, Masahiro**  
**Hirakata-shi, Osaka-fu 573-01 (JP)**
- **Kakiuchi, Takashi**  
**Toyonaka-shi, Osaka-fu 561 (JP)**
- **Kusumi, Yuki**  
**Kashiba-shi, Nara-ken 639-02 (JP)**
- **Miyabe, Yoshiyuki**  
**Osaka-shi, Osaka-fu 532 (JP)**
- **Minakata, Ikuo**  
**Souraku-gun, Kyoto-fu 619-02 (JP)**
- **Kozuka, Masayuki**  
**Neyagawa-shi, Osaka-fu 572 (JP)**
- **Mimura, Yoshihiro**  
**Hirakata-shi, Osaka-fu 573 (JP)**

(74) Representative: **Butcher, Ian James et al**  
**A.A. Thornton & Co.**  
**Northumberland House**  
**303-306 High Holborn**  
**London WC1V 7LE (GB)**

(54) **Terminal apparatus and method for achieving interactive operations**

(57) A terminal apparatus is provided for displaying an image by reproducing a piece of image information and for interactively changing the image using navigation information. The image is a moving picture, a still picture, or a mixture of them. The image information and the navigation information together are broadcast by a broadcasting station to the terminal apparatus. The navigation information indicates a plurality pieces of link-target image information. The cache unit stores a pair of image information and navigation information. The reproducing unit reproduces the image information. The monitoring unit monitors whether an operator has performed a certain operation responding to the image displayed. The receiving unit, before the operator performs the certain operation, receives a plurality pieces of im-

age information which have possibility of being displayed and a plurality pieces of corresponding navigation information based on the navigation information, and stores the plurality pieces of image information and navigation information in the cache unit. The specifying unit specifies a piece of link-target image information based on the certain operation. The identifying unit identifies the piece of link-target image information as a piece of image information. The first controlling unit reads the piece of link-target image information and instructs the reproducing unit to reproduce the piece of link-target image information, and instructs the receiving unit to receive other plurality pieces of image information and navigation information based on a piece of navigation information corresponding to the link-target image information identified by the identifying unit.



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 97 30 6627

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	MEYER-BOUDNIK T ET AL: "MHEG EXPLAINED" IEEE MULTIMEDIA, vol. 2, no. 1, 21 March 1995 (1995-03-21), pages 26-38, XP000500084 ISSN: 1070-986X	1,25,33, 41, 43-45,52	H04N7/173 H04N5/00 H04N7/16
A	* page 28, left-hand column, paragraph 3 - right-hand column, paragraph 4 * * page 32, right-hand column, paragraph 4 * * page 33, left-hand column, paragraph 6 - page 34, right-hand column, paragraph 1 * * page 35, right-hand column, paragraph 4 * * page 36, right-hand column, paragraph 7 *	42	
Y	--- PADMANABHAN V N ET AL: "USING PREDICTIVE PREFETCHING TO IMPROVE WORLD WIDE WEV LATENCY" COMPUTER COMMUNICATIONS REVIEW, vol. 26, no. 3, 1 July 1996 (1996-07-01), pages 22-36, XP000607179 ISSN: 0146-4833 * page 25, paragraph 4 - paragraph 5 * * page 26, paragraph 2 * * page 27, paragraph 2 - paragraph 3 * * figure 3 *	1,25,33, 41, 43-45,52	TECHNICAL FIELDS SEARCHED (Int.Cl.6) H04N G06F
A	--- US 5 541 662 A (ADAMS ROBERT ET AL) 30 July 1996 (1996-07-30) * column 4, line 46 - line 65 * * column 5, line 39 - line 47 * * column 7, line 43 - column 8, line 23 * * column 8, line 64 - column 9, line 10 * --- -/--	1,25,33, 41-45,52	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 17 August 1999	Examiner Sindic, G
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 (03/92) (P04C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 97 30 6627

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	EP 0 477 786 A (INTELETEX SYSTEMS INC) 1 April 1992 (1992-04-01) * column 8, line 46 - column 9, line 4 * * column 14, line 39 - line 49 * -----	1,25,33, 41-45,52	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>17 August 1999</b>	Examiner <b>Sindic, G</b>
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.92 (P/4C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 97 30 6627

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

17-08-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5541662 A	30-07-1996	AU 3411595 A	26-04-1996
		EP 0783818 A	16-07-1997
		WO 9610888 A	11-04-1996
		US 5760838 A	02-06-1998
EP 0477786 A	01-04-1992	US 5093718 A	03-03-1992
		US 5220420 A	15-06-1993
		AU 643828 B	25-11-1993
		AU 8483891 A	02-04-1992
		CA 2052477 A,C	29-03-1992
		CN 1063593 A	12-08-1992
		CS 9102869 A	13-05-1992
		FI 914552 A	29-03-1992
		IL 99586 A	22-02-1998
		JP 6022315 A	28-01-1994
		NZ 239969 A	22-12-1994
		PT 99110 A	31-12-1993
		TR 25669 A	01-07-1993
		US 5526034 A	11-06-1996
		US 5594507 A	14-01-1997
		US 5442700 A	15-08-1995
		US 5485197 A	16-01-1996
		US 5557316 A	17-09-1996
		US 5550578 A	27-08-1996
		US 5587734 A	24-12-1996
		US 5883661 A	16-03-1993
		US 5412720 A	02-05-1995
		US 5361091 A	01-11-1994
		US 5319455 A	07-06-1994

EPO FORM P469

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82